


# MODULAR ELECTRONIC DEVICES



# ELKO EP




**We are traditional, innovative and purely Czech development manufacturer of electronic devices and we have been your partner in the field of electroinstallations for 26 years.**

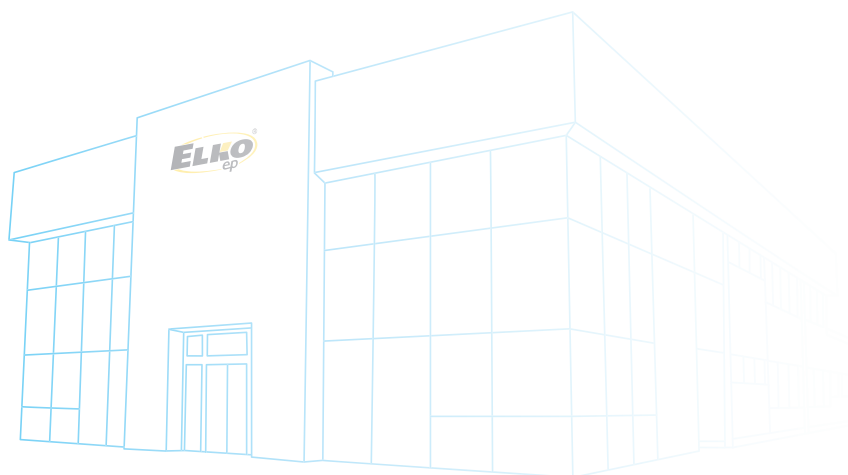



# Facts and stats

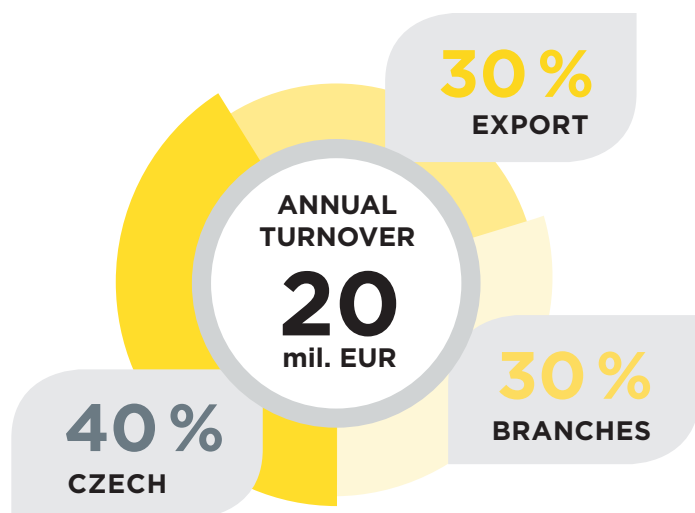


## WE ARE



### DEVELOPERS

In the new R&D center, more than 30 engineers develop new products and extend the functionality of existing products




### PRODUCERS

modern antistatic spaces, 2x fully automated SMD production lines, 2 shift operations.



### SUPPORT

24 hours / 7 days / 360 days we not only provide technical support but also logistics.



### SELLERS

personal access to more than 70 sales representatives in ELKO EP Holding provides impeccable services and superior products at an affordable price.

# Product Lines ELKO EP



## Timers/Relays

[www.elkoep.com/relay-modular-electronic-devices](http://www.elkoep.com/relay-modular-electronic-devices)

A wide range of electronic modular devices, which bring new possibilities to home and office control, monitoring and security, as well as to industrial process control: time relays, installation contactors, staircase automatic switches, time switches clocks, dimmers, thermostats, power supplies units, control and signalling devices, GSM gates, etc.



## Protection relays for industry

[www.elkoep.com/protection-monitor-relay](http://www.elkoep.com/protection-monitor-relay)

Every household, every object and every machine needs a monitoring relay. There are several reasons why, overvoltage, under voltage, phase failure, asymmetry, frequency, or power factor.



## iNELS Air – IoT devices

[www.elkoep.com/iot-products](http://www.elkoep.com/iot-products)

The new iNELS Air product line responds to the dynamically developing network IoT (Internet of Things). These networks enable devices to communicate safely, over long distances and are optimized to minimize power consumption. The product group includes sensors for communication on the Sigfox, LoRa and NB-IoT protocol.



## Wireless electroinstallation (RF)

[www.elkoep.com/wireless-rf-control](http://www.elkoep.com/wireless-rf-control)

A unique wireless control system providing you perfect control over your home! The RF Control system enables you to control functions such as heating, lighting, electrical appliances and window shutters, all with a single touch. No wall cutting, fast and easy installation, exclusive design of wireless wall switch buttons and other components.



## Wired electroinstallation (BUS)

[www.elkoep.com/inels-bus-system](http://www.elkoep.com/inels-bus-system)

The BUS system offers a unique solution for new installations (refurbishment) in family houses, hotels and villas. It offers a wide range of functions for both automation and comfort.



## Energy management

[www.elkoep.com/energy-management](http://www.elkoep.com/energy-management)

Measuring energy consumption in the home or in larger areas is an increasing trend. Our products provide measurement with three different technologies – using a BUS or wireless system and thanks also with the IoT.



## Wireless Retrofit Hotel (HRESK)

[www.elkoep.com/hotel-hresk](http://www.elkoep.com/hotel-hresk)

Hotel Room Energy Saving Kit - Solutions for hotel rooms based on wireless technology is designed to function in existing hotels. It is possible to simply elevate the existing electrical installation to a higher level without long-lasting construction modifications.



## Hospitality Hotel (GRMS)

[www.elkoep.com/inels-hospitality](http://www.elkoep.com/inels-hospitality)

Guest Room Management System – The BUS system is designed mainly for hotels and offers comfortable and easy control of hotel rooms, reception and restaurant.



## Building management system

[www.elkoep.com/bms](http://www.elkoep.com/bms)

Building Management System is a comprehensive solution for monitoring, and controlling even the most complex of building systems. You can monitor everything on your computer monitor or tablet in the comfort of reception or office.



## Lighting control

[www.elkoep.com/lighting-control](http://www.elkoep.com/lighting-control)

A sector that offers complete control over all lighting devices. From switching, dimming to controlling your favourite DALI luminaires. Everything can be controlled with a connection to iNELS wired or wireless technology.



## Multimedia

[www.elkoep.com/av-multimedia](http://www.elkoep.com/av-multimedia)

Here you can find extensions for our iNELS system and not just for it. Lara Music Players, Intercoms and Door Communicators, Application Communication Servers and 3rd party applications.



## Switches and sockets

[www.elkoep.com/logus90-products](http://www.elkoep.com/logus90-products)

We offer you exclusive switches, sockets and accessories in a standard plastic or metallic design. However, there are also charming luxury frames from purely natural materials such as genuine wood, metal, granite or hardened glass. Be especial!



## Lighting sources

[www.elkoep.com/lighting-sources](http://www.elkoep.com/lighting-sources)

Are you looking for a bulb in your chandelier? In this section you will find among the most common types of bulbs also LED strips and other LED sources, power transformers and installation accessories such as ALU profiles, diffusers.



# CRM-100



← The brand new CRM-100 **digital multi-function time relay** is used, for example, to control lighting in your home, but it can also be used to control motors or pumps. Thanks to the digital setting and display time, the need for mechanical adjustment of the devices is avoided, resulting in maximum accuracy. This versatile power relay includes the 17 most used functions for each application. If you have it at your fingertips, it will replace many other types which you needn't look for or buy.

# SHT-7

**Near Field Communication** is the way of wireless communication of two devices within a short distance of a few centimeters. A typical example of NFC is credit card payment, but now our ability to control your timing clock is also an option. You can also conveniently set it up using a smartphone and transfer these set modes to other devices, clone them or back them up.



# Protection relays for industry



← New types feature the ability to measure with accuracy of approximately 2%, which distinguishes them from cheap competitors and increases reliability. The relay boasts a lower power output of only 2.5 watts and the ability to monitor both alternating voltage and non-sinusoidal waveforms. They are suitable for 50 Hz and 60 Hz, which is especially appreciated by customers, whose products travels overseas. Thanks to the AT Mega 48P processor we can customize the parameters of the product. Inside the product there are no plug connections, so they are mechanically very resistant to shocks as well.

Time relays

CRM-81J, CRM-83J   Single-function time relay .....	10
CRM-82TO   Delay OFF without supply voltage .....	11
SJR-2   Doublestage delay unit .....	12
CRM-2T   Delay ON star/delta .....	13
CRM-2H   Asymmetric cycler .....	14
CRM-61   Multifunction time relays .....	15
CRM-91H, CRM-93H, CRM-9S   Multifunction time relays .....	16
CRM-100   Digital multifunction time relay - <b>NEW</b> .....	18
CRM-91HE, CRM-2HE   Time relay with external potentiometer .....	20
PRM-91H/8, PRM-91H/11, PRM-92H, PRM-2H   Plug-in time relay .....	21
PDR-2/A, PDR-2/B   Programmable digital relay .....	22
SHT-1, SHT-1/2, SHT-3, SHT-3/2   Digital time switch clock .....	24
SHT-4   Digital time switch with an astronomical program .....	25
SHT-6   Time switch with DCF control .....	26
DCFR-1   Receiver DCF 77 .....	27
SHT-7   Switch timer clock with NFC programming capability - <b>NEW</b> .....	28
SMR-K, SMR-T, SMR-H, SMR-B   Super-multifunction relay .....	30
CRM-42, CRM-42F   Programmable staircase switch with signalling before switch off .....	32
CRM-4   Staircase switch .....	34

Auxiliary and Power relays

VS116B/230, VS116K, VS116U, VS308K, VS308U, VS316/24, VS316/230   Power relays .....	36
750L, 782L   Power relays plug-in .....	38

Dimmers

DIM-2   Staircase switch with dimming .....	42
DIM-5   Controlled dimmer .....	43
DIM-6   Controlled dimmer .....	44
DIM6-3M-P   Expanding power module .....	45
DIM-15, SMR-M   Universal dimmer .....	46
DIM-14   Controlled dimmer .....	48
SMR-S, SMR-U   Controlled dimmer .....	49
LIC-1   Lighting intensity controller .....	50
LIC-2   Lighting intensity controller .....	51

Power supplies

PSB-10-12, PSB-10-24, PS-10-12, PS-10-24, PS-30-12, PS-30-24, PS-30-R, PS-100-12, PS-100-24   Power supplies .....	54
DR-60-12, DR-60-24   Power supplies .....	56
ZSR-30, ZNP-10   Power supply .....	57
ZTR-8-8, ZTR-8-12, ZTR-15-12   Bell transformers .....	58

Twilight switches

SOU-1   Twilight switch .....	61
SOU-2   Twilight switch with digital time switch clock .....	62
SOU-3   Twilight light switch .....	63

Memory relays

MR-41, MR-42   Memory & latching relays .....	64
---	----

Control and signalling devices

USS   Controlling and signalling modules .....	65
--	----

Monitoring relays

HRN-33, HRN-63 HRN-34, HRN-64, HRN-35, HRN-37, HRN-67   Monitoring voltage relay .....	70
HRN-41, HRN-42   Monitoring voltage relay .....	72
HRN-43, HRN-43N   Relay for complete monitoring 3-phase mains .....	74
HRN-54, HRN-54N   Relay for monitoring over/under voltage, phase sequence and failure .....	76
HRN-55, HRN-55N   Relay for monitoring phase sequence and failure .....	77
HRN-56   Relay for monitoring phase sequence and failure .....	78
HRN-57, HRN-57N   Relay for monitoring over/under voltage in 3-phase mains .....	79
MPS-1   Optical signaling of three-phase main .....	80
HRF-10   Frequency monitoring relay .....	81
COS-2   Power factor monitoring relay - <b>INNOVATION</b> .....	82



PRI-32   Current monitoring relay .....	84
PRI-51   Current monitoring relay .....	85
PRI-41, PRI-42   Current monitoring relay .....	86
PRI-52   Current monitoring relay .....	88
PRI-53   Three-phase current monitoring relay .....	89
HRH-5   Level switch .....	90
HRH-4   Level set .....	91
HRH-6   Level switch .....	92
HRH-7   Level switch .....	94
HRH-8   Level switch - <b>INNOVATION</b> .....	96
HRH-x   Level sets .....	98
<b>Level switches accessories</b>	
SHR   Level sensors .....	100
Cables, wires .....	101
<b>Thermostats and hygrostats</b>	
TER-3A, TER-3B, TER-3C, TER-3D, TER-3G, TER-3H   Thermostats .....	104
TER-3E, TER-3F   Thermostats .....	105
TER-4   2-stage thermostat .....	106
TER-9   Multifunction digital thermostat .....	108
TER-7   Thermostat for monitoring temperature of motor winding .....	110
ATR, ATF, ATC   Analog room and floor thermostat .....	111
DTR, DTF, DTC   Digital room and floor thermostat .....	112
ATV-1   Energy-saving digital thermo-valve .....	113
TEV-1   Thermostat .....	114
TEV-2, TEV-3   Thermostats .....	115
TEV-4   Thermostat .....	116
RHT-1   Hygro-thermostat .....	117
RHV-1   Hygrostat .....	118
<b>Accessories to Thermostats</b>	
TC, TZ, Pt100   Temperature sensors .....	119
Telva 230 V, Telva 24V   Thermo drive .....	120
<b>Protection relays for industry - NEW</b>	
VROU1-28   Under and over voltage monitoring relays .....	125
VRU1-28, VRO1-28   Voltage monitoring relays .....	126
VRSC1-28   Synchro-check monitoring relays .....	127
VRMV1-28   DC low voltage monitoring relays .....	128
VROU3-28   Under and over voltage monitoring relays .....	129
VRU3-28   Under voltage monitoring relays .....	130
VRO3-28   Over voltage monitoring relays .....	131
VROU3N-28   Under and over voltage monitoring relays .....	132
VRU3N-28   Under voltage monitoring relays .....	133
VRO3N-28   Over voltage monitoring relays .....	134
VRSF3, VRSF3N   Failure and phase sequence monitoring relays .....	135
VRBU3, VRBU3N   Phase balance and undervoltage monitoring relays .....	136
CROU1-28   Under and over AC current monitoring relays .....	137
CRU1-18, CRO1-18   AC current monitoring relays .....	138
CRGF1-18   Ground fault monitoring relays .....	139
CRMA1-28   DC low current monitoring relays .....	140
CRRP1-28, CRRP3-28   Reverse power monitoring relays .....	141
FRSS1-38   Speed sensing/monitoring relay .....	142
<b>Installation contactors</b>	
VS120, VS220, VS420, VS425, VS440, VS463   Installation contactors .....	144
VSM220, VSM425   Installation contactors with manual control .....	146
<b>Technical information</b> .....	
	151

Single-function



**CRM-81J**  
3 functions and 6 time ranges, multivoltage or 230 V supply, output 16 A changeover/SPDT.



**CRM-83J**  
as CRM-81J but with 3x8 A changeover output/SPDT.



**CRM-82TO**  
"true OFF" relay - delay off without supply, for back-up circuits.



**SJR-2**  
two-state delay unit (2x delay on), gradual switching of high loads.



**CRM-2T**  
delay start-up of motors star/delta.



**CRM-2H**  
asymmetric cycler, independent time setting ON/OFF.



**CRM-2HE**  
as CRM-2H, but time setting by external potentiometers (for frequent setting).

Multifunction

Analog



**CRM-91H**  
10 functions, 10 time ranges, 1x output 16 A changeover/SPDT, multivoltage or 230 V supply.



**CRM-93H**  
as CRM-91 but output 3x 8 A changeover/SPDT.



**CRM-9S**  
as CRM-91 but contactless output (triac 0.7A).



**CRM-61**  
cost effective version of CRM-91H, 6 functions, 6 time ranges. Output 8 A changeover/SPDT, supply AC 24-240 V, DC 24V.



**CRM-91HE**  
as CRM-91H but with time setting by external potentiometer (for frequent setting).



**Potentiometer**  
potentiometer - external control unit for CRM-91HE and CRM-2HE, mounting into a switchboard, max connection length 10 m.

Digital



**CRM-100**  
17 functions, time range 0.1 s- 999 hours, 1x 8 A changeover contact, power supply 24-240 V AC/DC.



**PDR-2A**  
4 digit display, 16 functions, 2 independent times 0.01s-100 hrs, 2 outputs 16 A changeover/SPDT START/STOP inputs.



**PDR-2B**  
as PDR-2A but 10 functions for each output and time - meaning two relays in one device.



**SHT-1, SHT-1/2**  
SHT-1: time switch with daily, weekly programming. 1-channel, output 16 A changeover/SPDT. SHT-1/2: as SHT-1, but 2-channel.



**SHT-3, SHT-3/2**  
as SHT-1 but with daily, weekly, monthly, and annual programming up to 2095. SHT-3/2: as SHT-3, but 2-channel.



**SHT-4**  
Timer with an astronomical program to control the lighting without using a light sensor. 2-channel.



**SHT-6**  
Time switch with DCF managing. Daily, weekly and annual program, output 16 A. 1-channel.



**SHT-7**  
Switch Timer clock with day and year program. Setting up with a smartphone supporting NFC transfer

PLUG-IN



**PRM-91H/11**  
as CRM-91H but into 11-pin socket, multivoltage supply, output contact 16 A.



**PRM-91H/8**  
as PRM-91H/11 but with 8-pin socket, output contact 16 A.



**PRM-92H**  
as PRM-91H but with 2x changeover / SPDT 8 A contacts, into 11-pin socket.



**PRM-2H**  
as CRM-2H but with 11-pin socket, 2x changeover, 8 A contact.



**socket to DIN rail**  
ES-11 (11 pin)  
ES-8 (8 pin).

MINI



**SMR-K**  
super multifunction relay for installation into an installation box, 3 wire connection (without neutral). Input: can be connected in parallel with LED energy saving light bulb or fluorescent lamp.



**SMR-T**  
super multifunction relay for installation into a wiring box, 3 wire connection (without neutral).



**SMR-H**  
as SMR-T but 4 wire connection, output - triac 0-200 VA, 9 functions including function of memory relay.



**SMR-B**  
as SMR-H but output relay contact 16 A (possibility to switch also fluorescent lights).

Staircase switch



**CRM-4**  
basic version, time 0.5-10 min, output contact 16 A, anti-blocking function.



**CRM-42**  
programmable staircase switch with warning before switching off, time setting by number of button pressings.



**CRM-42F**  
programmable staircase switch without warning before switching off, time setting by number of button pressings.



**DIM-2**  
with dimming, setting: dim-up/shining/dim-down brightness only for el. bulbs output up to 500 VA.



Chart 1. Version  
DIN rail mounting

Type		CRM-81J/ZR	CRM-81J/ZN	CRM-81J/BL	CRM-83J/ZR	CRM-83J/ZN	CRM-83J/BL	CRM-82TO	CRM-91H	CRM-93H	CRM-91HE	CRM-2HE	CRM-9S	CRM-2H	CRM-2T	CRM-4	CRM-42 (CRM-42F)	CRM-61	SJR-2	PDR-2/A	PDR-2/B	SHT-1 (SHT-1/2)	SHT-3 (3/2), SHT-6	SHT-4 (SHT-7)	SOU-2	PRM-91H	PRM-92H	PRM-2H		
Design	1-MODULE	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●											
	2-MODULE																					●	●	●	●					
	3-MODULE																			●	●									
	PLUG-IN																									●	●	●		
	Under the switch	See chart 2 Version - mounting into an installation box																												
Adjusting	Rotary switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●								●	●	●	
	Button																			●	●	●	●	●	●					
	Sliding switch															●	●					●	●	●	●	●				
	External potentiometer											●	●				●	●												
Functions	Delay OFF after switch off the Input supply							●																						
	Delay ON	●			●			●	●	●	●		●					●	●	●	●						●	●		
	Delay OFF		●			●			●	●	●		●					●		●	●						●	●		
	Symmetrical cycler starting with delay								●	●	●		●							●	●						●	●		
	Delay OFF after impulse OFF			●			●		●	●	●		●					●		●	●						●	●		
	Symmetrical cycler starting with impulse								●	●	●		●					●		●	●						●	●		
	Staircase switch								●	●	●		●			●	●			●	●						●	●		
	Impulse shift								●	●	●		●							●	●						●	●		
	Memory (impulse) relay								●	●	●		●														●	●		
	Impulse generator								●	●	●		●								●						●	●		
	Delay ON at switch on controlling contact																	●		●	●									
	Asymmetric cycler starting with delay											●		●							●							●		
	Asymmetric cycler starting with impulse											●		●						●								●		
	Delay ON star / delta														●					●										
	Switching in real time																					●	●	●	●					
	Impuls relay in delay ON																	●												
	Time	0.1 - 1 s	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●								●	●	●
		1 - 10 s	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●								●	●	●
		0.1 - 1 min	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●								●	●	●
1 - 10 min		●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●								●	●	●	
0.1 - 1 hrs		●	●	●	●	●	●		●	●	●	●	●	●	●			●	●								●	●	●	
1 - 10 hrs		●	●	●	●	●	●		●	●	●	●	●	●	●			●	●								●	●	●	
0.1 - 1 day									●	●	●	●	●	●	●				●								●	●	●	
1 - 10 days									●	●	●	●	●	●	●				●								●	●	●	
3 - 30 days												●		●	●													●	●	●
10 - 100 days												●		●	●													●	●	●
30 s - 10 min																	●	●												
99 h 59 min 59 s																				●	●									
Day																						●	●	●	●	●				
Week																							●	●		●				
Month																								●		●				
Year																									●	●	●			
Supply voltage	230 V AC	●	●	●	●	●	●		●	●				●	●	●	●		●	●	●	●	●	●	●	●		●	●	
	12 - 240 V AC/DC	●	●	●	●	●	●	●	●	●	●		●	●					●	●	●	●	●	●	●	●	●	●	●	
	12 - 240 V AC												●																	
Output	1x changeover / SPDT 8 A																	●								●				
	1x changeover / SPDT 16 A	●	●	●					●		●	●		●		●						●	●	●	●	●	●			
	2x changeover / DPDT 8 A							●																			●	●		
	2x changeover / DPDT 16 A															●			●	●	●	Ⓢ	Ⓢ							
	3x changeover / SPDT 8 A				●	●	●			●																				
	Static output (triac)																													
	1x NO 16 A																●													

Chart 2. Version  
Mounting into an installation box

Type		SMR-K, SMR-T, SMR-H	SMR-B
Functions	a - delay off on entering edge	●	●
	b - delay off on downward edge	●	●
	c - delay off on downward edge	●	●
	d - cycler - flasher by impuls	●	●
	e - pulse shift	●	●
	f - delay on	●	●
	g - pulse relay	●	●
	h - impulse relay with delay	●	●
	i - cycler starting with gap	●	●
	j - delay on after switched off		●
Time	0.1 - 1 s	●	●
	1 - 10 s	●	●
	0.1 - 1 min	●	●
	1 - 10 min	●	●
	0.1 - 1 h	●	●
	1 - 10 h	●	●
	0.1 - 1 day	●	●
	1 - 10 days	●	●
Supply voltage	AC 230 V	●	●
Number of contacts	1x triac	●	
	1x NO AgSnO <sub>2</sub>		●




EAN code  
CRM-81J according to type  
CRM-83J according to type


Technical parameters		CRM-81J	CRM-83J
Functions:		ZR - delay ON / ZN - delay OFF / BL- cycler 1:1	
Supply terminals:		A1 - A2	
Voltage range:	UNI	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W	
Voltage range:	230	AC 230 V / 50 - 60 Hz	
Consumption (apparent/loss):		AC max. 12 VA / 1.3 W	AC max. 12 VA / 1.9 W
Supply voltage tolerance:		-15 %; +10 %	
Supply indication:		green LED	
Time ranges:		0.1 s - 10 h (in 6 ranges)	
Time setting:		potentiometer	
Time deviation:		5 % - mechanical setting	
Repeat accuracy:		0.2 % - set value stability	
Temperature coefficient:		0.01% / °C, at =20 °C (0.01 % / °F, at = 68°F)	
Output			
Number of contacts:		1x chang./ SPDT (AgNi / Silver Alloy)	3x chang./ 3PDT (AgNi / Silver Alloy)
Current rating:		16 A / AC1	8 A / AC1
Breaking capacity:		4000 VA / AC1, 384 W / DC	2000 VA / AC1, 192 W / DC
Inrush current:		30 A / <3 s	10 A / <3 s
Switching voltage:		250 V AC1 / 24 V DC	
Output indication:		red LED	
Mechanical life:		3x10 <sup>7</sup>	
Electrical life (AC1):		0.7x10 <sup>5</sup>	
Control			
Consumption of input:		AC 0.025 - 0.2 VA / DC 0.1 - 0.7 W (UNI), AC 0.53 VA (AC 230 V)	
Load between S-A2:		Yes	
Control terminals:		A1-S	
Glow tubes connctions:		230 V - Yes / UNI - No	
Max. amount of glow lamps connected to controlling input:		UNI - glow lamps cannot be connected 230 V - max.10 pcs (measured with glow lamp 0.68 mA / 230 AC)	
Impulse length:		min. 25 ms / max. unlimited	
Reset time:		max. 150 ms	
Other information			
Power of control input:		-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:		-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:		4 kV (supply-output)	
Operating position:		any	
Mounting:		DIN rail EN 60715	
Protection degree:		IP40 from front panel / IP20 terminals	
Overvoltage category:		III.	
Pollution degree:		2	
Max. cable size (mm²):		solid wire max.1x2.5 or 2x1.5 / with sleeve max.1x2.5 (AWG 12)	
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:		(UNI) 62g (2.2 oz.), (230) 60g (2.1 oz.)	(UNI) 86g (3 oz.), (230) 82g (2.89 oz.)
Standards:		EN 61812-1, EN 61010-1	

- Single-function and single-time relay with fine time setting by a potentiometer (within the frames of a particular time range).
- Suitable for applications where function and time requirements are known.
- Time switch, possible to be used for pump delay after switching heating off, switching of fans.
- Choice of 3 functions:
  - 1) ZR - Delay ON
  - 2) ZN - Delay OFF
  - 3) BL - Repeat Cycle
- Functions can be controlled by supply voltage or time scale control input
- Choice of 6 time ranges: (0.1 s - 1 s / 1 s - 10 s / 6 s - 60 s / 1 min - 10 min / 6 min - 60 min / 1 h - 10 hrs)
- Universal voltage range AC/DC 12 - 240 V or AC 230 V.
- Output contact: CRM-81J: 1x changeover/ SPDT 16 A  
CRM-83J: 3x changeover/ 3PDT 8 A.
- Red LED output indicator.
- 1-MODULE, DIN rail mounting.

### Description

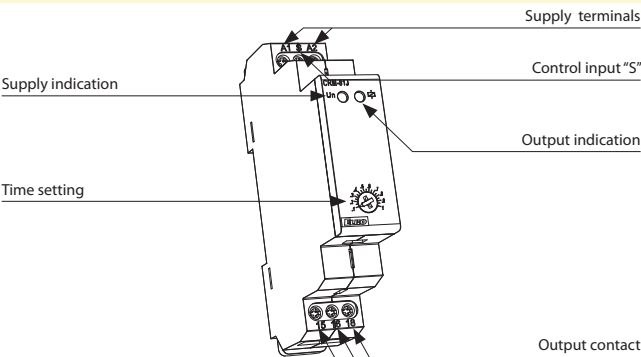


### Functions




Note: the function ZR and ZN is controlled by supply voltage and control input ie. Once phase failure is detected and supply voltage is re applied, The relay automatically makes one cycle.

### Connection

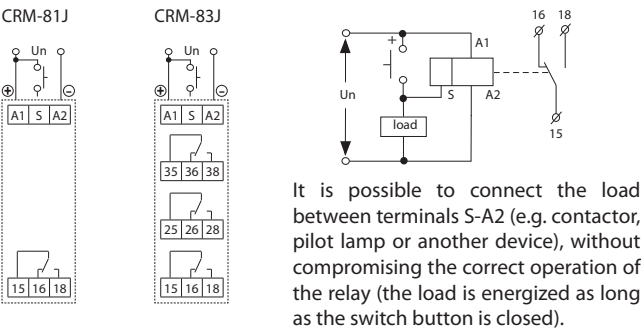

### Symbol

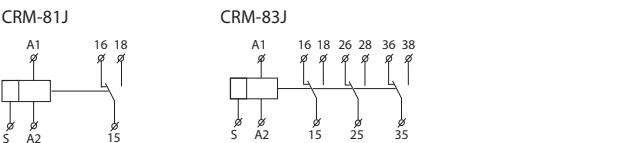

### Example of an order

**CRM-81J/230, ZR10s:** 1x changeover contact, voltage AC 230 V, function: delay ON, time 1 - 10 s

**CRM-83J/UNI, BL1h:** 3x changeover contact, voltage AC/DC 12-240 V, function: cycler begin with impulse, time 6-60 min





EAN code  
CRM-82TO /UNI: 8595188137614

### Technical parameters

### CRM-82TO

Number of functions:	a - On Delay (Power On) / e - Off Delay (S Break)
Supply terminals:	A1 - A2
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)
Burden:	AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Supply voltage tolerance:	-15 %; +10 %
Supply indication:	green LED
Time ranges:	0.1 s - 10 min
Time setting:	potentiometer
Time deviation:	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.1 % / °C, at = 20 °C (0.1 % / °F, at = 68 °F)

### Output


Number of contacts:	2x changeover/DPDT (AgNi/ Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 192 W / DC
Inrush current:	10 A / <3 s
Switching voltage:	250 V AC1 / 24 V DC
Output indication:	red LED
Mechanical life:	3x10 <sup>7</sup>
Electrical life (AC1):	0.7x10 <sup>5</sup>

### Other information

Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply-output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 2x 1.5 or 1x 2.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	93 g (3.3 oz.)
Standards:	EN 61812-1, EN 61010-1

- „True OFF“ relay - relay timing without supply voltage.
- Example of use: back-up source for Delay OFF in case of voltage failure (e.g. emergency lighting, emergency respirator, or protection of el. controlled doors - in case of fire).
- 2 time functions adjustable by rotary switch:
  - a - Delayed return after disconnecting of supply.
  - e - Delayed start.
- Time range (adjustable by rotary switch and fine setting by potentiometer): 0.1 s - 10 min.
- Universal supply voltage AC/DC 12 - 240 V.
- Interruptions in the power supply must take time steps (tens to hundreds of milliseconds).
- Output contact: 2x changeover / DPDT 8 A.
- Output status indicated by red LED (only in case of supply voltage connection).
- Clamp terminals.
- 1-MODULE, DIN rail mounting.


### Description

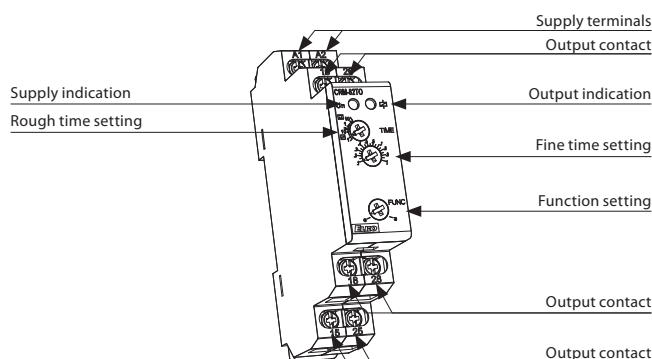


### Function

a - Delay OFF (S break) the power supply is switched off (min. time is 0.5 s)


e - Off Delay (S break)



### Connection



### Symbol






EAN code  
SJR-2 / 230 V: 8595188116015  
SJR-2 / UNI: 8595188117401


Technical parameters		SJR-2
Number of functions:		2x delay ON
Supply terminals:		A1 - A2
Voltage range:	UNI	AC/DC 12 - 240 V (AC 50 - 60 Hz)
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Voltage range:	230	AC 230 V / 50 - 60 Hz
Power input (apparent/loss):		AC max. 12 VA / 1.3 W
Supply voltage tolerance:		-15 %; +10 %
Supply indication:		green LED
Time ranges:		0.1 s - 10 days
Time setting:		rotaty switch and potentiometer
Time deviation:		5 % - mechanical setting
Repeat accuracy:		0.2 % - set value stability
Temperature coefficient:		0.01 % / °C, at = 20 °C (0.01 % / °F, at = 68 °F)
Output		
Number of contacts:		2x changeover/ DPDT (AgNi / Silver Alloy)
Current rating:		16 A / AC1
Breaking capacity:		4000 VA / AC1, 384 W / DC
Inrush current:		30 A / < 3 s
Switching voltage:		250 V AC1 / 24 V DC
Output indication:		multifunction red LED
Mechanical life:		3x10 <sup>7</sup>
Electrical life (AC1):		0.7x10 <sup>5</sup>
Reset time:		max. 150 ms
Other information		
Operating temperature:		-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:		4 kV (supply-output)
Operating position:		any
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel / IP20 terminals
Overvoltage category:		III.
Pollution degree:		2
Max. cable size (mm²):		solid wire max. 1x 2.5 or 2x1.5/ with sleeve max. 1x 2.5 (AWG 12)
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:		UNI - 88 g (3.1 oz.), 230 - 83 g (2.9 oz.)
Standards:		EN 61812-1, EN 61010-1

- For gradual switching of high power (e.g. el.heating), prevents current strokes in the main.
- Function: 2x Delay ON (2 time relays in one).
- Time scale 0.1s - 10 days divided into 10 time ranges:  
0.1s - 1s / 1s - 10s / 0.1min - 1min / 1min - 10min / 0.1h - 1h / 1h - 10hrs / 0.1 day - 1 day / 1 day - 10 days / ON / OFF
- Times t1 and t2 are independantly adjustable.
- t1 and t2 are switched on after supply voltage connection.
- Rough time setting via rotary switch.
- Voltage range: AC 230 V or AC/DC 12 - 240 V.
- Output contact: 2 x changeover / DPDT 16 A.
- Output indication: multifunction red LED, flashing at certain states.
- 1-MODULE, DIN rail mounting.


### Description

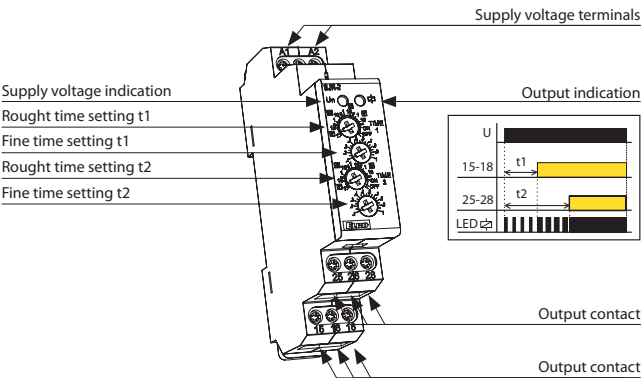


### Function



### Connection



### Symbol






EAN code  
CRM-2T /230 V: 8595188112291  
CRM-2T /UNI: 8595188112437

Technical parameters		CRM-2T
Number of functions:		1
Supply terminals:		A1 - A2
Voltage range:	UNI	AC/DC 12 - 240 V / AC 50 - 60 Hz
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Voltage range:	230	AC 230 V / 50 - 60 Hz
Burden:		AC max. 12 VA / 1.9 W
Supply voltage tolerance:		-15 %; +10 %
Supply indication:		green LED
Time scale:		t1: 0.1 s - 100 days, t2: 0.1 s - 1 s
Time setting:		potentiometer
Time deviation:		5% - mechanical setting
Repeat accuracy:		0.2 % - set value stability
Temperature coefficient:		0.01 % / °C, at = 20 °C (0.01 % / °F, at = 68 °F)
Output		
Number of contacts:		2x changeover/ DPDT (AgNi / Silver Alloy)
Current rating:		16 A / AC1
Breaking capacity:		4000 VA / AC1, 384 W / DC
Inrush current:		30 A / < 3 s
Switching voltage:		250 V AC1 / 24 V DC
Output indication:		multifunction red LED
Mechanical life:		3x10 <sup>7</sup>
Electrical life (resistive):		0.7x10 <sup>5</sup>
Reset time:		max. 150 ms
Other information		
Operating temperature:		-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:		4 kV (supply-output)
Operating position:		any
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel / IP20 terminals
Overvoltage category:		III.
Pollution degree:		2
Terminal wire capacity (mm <sup>2</sup> ):		max. 1x 2.5, 2x 1.5, with sleeve max. 1x 2.5 (AWG 12)
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:		84 g (3 oz.)
Standards:		EN 61812-1, EN 61010-1

- It serves for delay ON of motors star/delta.
- Time t1 (star)
  - time scale 0.1 s - 100 days divided into 10 time ranges.
  - rough time setting by rotary switch
- Time t2 (delay) between  $\Delta$  /  $\Delta$ :
  - time scale 0.1 s - 1 s
  - fine time setting by potentiometer
- Voltage range: AC 230 V, AC/DC 12 - 240 V.
- Output contact: 2x changeover / DPDT 16 A.
- Output indication: multifunction red LED.
- 1-MODULE, DIN rail mounting.

## Description

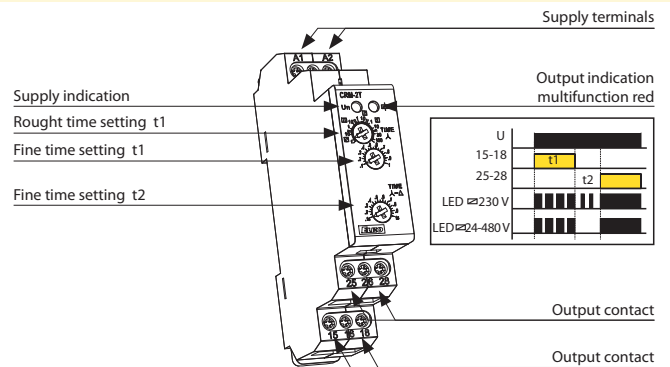


## Function

Delay ON star / delta




## Connection

Start up of motor ( $\Delta$ - $\Delta$ )

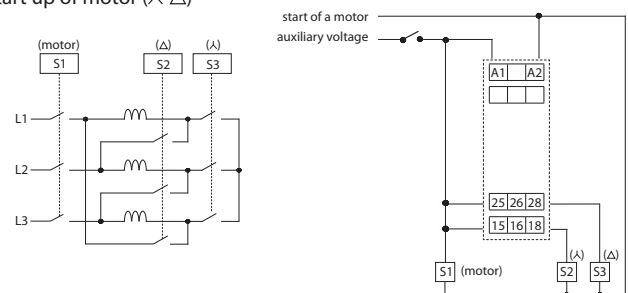

## Symbol








EAN code  
CRM-2H / 230 V: 8595188124201  
CRM-2H / UNI: 8595188113007

Technical parameters		CRM-2H
Number of functions:		2 (function is chosen by connecting S-A1)
Supply terminals:		A1 - A2
Voltage range:	UNI	AC/DC 12 - 240 V (AC 50 - 60 Hz)
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Voltage range:	230	AC 230 V / 50 - 60 Hz
Power input (apparent/loss input):		AC max. 12 VA / 1.3 W
Supply voltage tolerance:		-15 %; +10 %
Supply indication:		green LED
Time scale:		0.1 s - 100 days
Time setting:		rotary switch and potentiometer
Time deviation:		5 % - mechanical setting
Repeat accuracy:		0.2 % - set value stability
Temperature coefficient:		0.01 % / °C, at = 20°C (0.01 % / °F, at = 68°F)
Output		
Number of contacts:		1x changeover/ SPDT (AgNi / Silver Alloy)
Current rating:		16 A / AC1
Breaking capacity:		4000 VA / AC1, 384 W / DC
Inrush current:		30 A / < 3 s
Switching voltage:		250 V AC1 / 24 V DC
Output indication:		multifunction red LED
Mechanical life:		3x10 <sup>7</sup>
Electrical life (resistive):		0.7x10 <sup>5</sup>
Reset time:		max. 150 ms
Other information		
Operating temperature:		-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:		4 kV (supply-output)
Operating position:		any
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel / IP20 terminals
Overvoltage category:		III.
Pollution degree:		2
Terminal wire capacity (mm²):		solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight		UNI - 65 g (2.3 oz.), 230 - 61 g (2.2 oz.)
Standards:		EN 61812-1, EN 61010-1

- Cycler with independent adjustable switch ON/OFF
- Used for regular room ventilation, cyclic dehumidification, light control, circulating pumps, illuminated advertising, etc.
- 2 time functions:
  - 1) Cycler beginning with pulse
  - 2) Cycler beginning with pause
- Function choice is done by an external jumper of terminals S-A1
- Time scale 0.1 s - 100 days divided into 10 time ranges:
 


(0.1 s - 1 s / 1 s - 10 s / 0.1 min - 1 min / 1 min - 10 min / 0.1 hrs - 1 h / 1 h - 10 hrs / 0.1 day - 1 day / 1 day - 10 days / 3 days - 30 days / 10 days - 100 days)
- Rough time setting via rotary switch
- Voltage range: AC 230 V or AC/DC 12 - 240 V
- Output contact: 1x changeover / SPDT 16 A
- Output indication: multifunction red LED
- 1-MODULE, DIN rail mounting

### Description

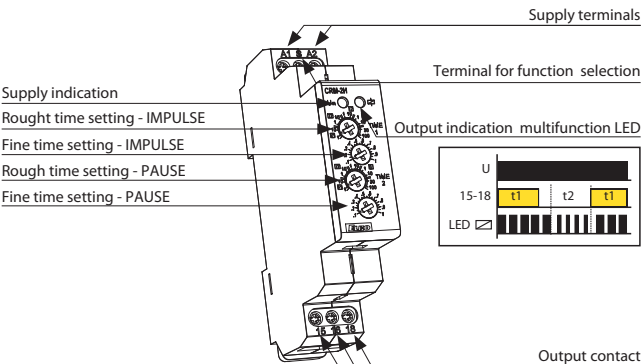


### Function

#### Cycler beginning with pulse



#### Cycler beginning with pause



### Connection


#### Cycler beginning with pulse



#### Cycler beginning with pause (jumper S-A1)



### Symbol





EAN code  
CRM-61: 8595188120210

### Technical parameters

### CRM-61

Number of functions:	6
Supply terminals:	A1 - A2
Supply voltage :	AC 24 - 240 V (AC 50 - 60 Hz) and DC 24 V
Burden:	AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Supply voltage tolerance:	15 %; +10 %
Supply indication:	green LED
Time ranges:	0.1 s - 10 h
Time setting:	rotary switch and potentiometer
Time deviation:	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 % / °C, at = 20°C (0.01 % / °F, at = 68°F)

### Output

Number of contacts:	1x changeover/ SPDT (AgNi / Silver Alloy)
Current rating:	8 A/ AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Output indication:	multifunction red LED
Mechanical life:	1x10 <sup>7</sup>
Electrical life (AC1):	1x10 <sup>5</sup>


### Controlling

Control. voltage:	AC 24 - 240 V (AC 50 - 60 Hz) and DC 24 V
Control power input:	AC 0.025 - 0.2 VA / DC 0.1 - 0.7 W
Load between S-A2:	Yes
Glow-tubes:	No
Control. terminals:	A1-S
Max. capacity of cable control:	0.1 μF
Impulse length:	min. 25 ms / max. unlimited
Reset time:	max. 120 ms

### Other information


Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply-output)
Operating position	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm²):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, 2x 1.5 mm² (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	69 g (2.4 oz.)
Standards:	EN 61812-1, EN 61010-1

### Symbol




- Multifunction time relay (6 functions and 6 time ranges), economic version of CRM-91H
- To be used for electrical appliances, control of lights, heating, motors, pumps, fans, etc.
- 6 functions:
  - 3 time functions controlled by supply voltage
  - 3 time functions controlled by control input
- Easy to use function and time-range setting by rotary switches
- Time scale 0.1 s - 10 hrs divided into 6 range:
  - (0.1 s - 1 s / 1 s - 10 s / 0.1 min - 1 min / 1 min - 10 min / 0.1 hrs - 1 h / 1 h - 10 hrs)
- Universal voltage range: AC 24 - 240 V, DC 24 V
- Output contact: 1x changeover 8 A / SPDT
- Multifunction red LED output indicator flashes or shines depending on the status of output
- 1-MODULE, DIN rail mounting


### Description

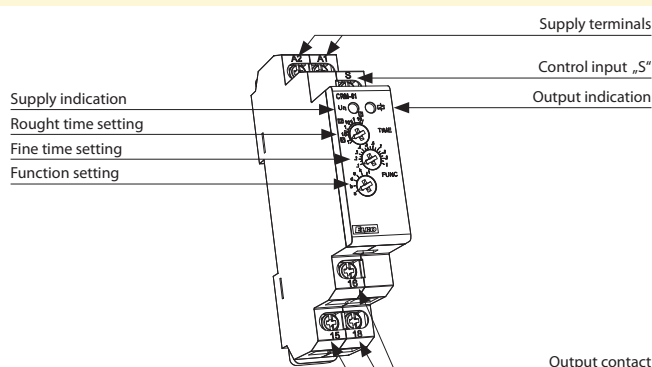

### Function

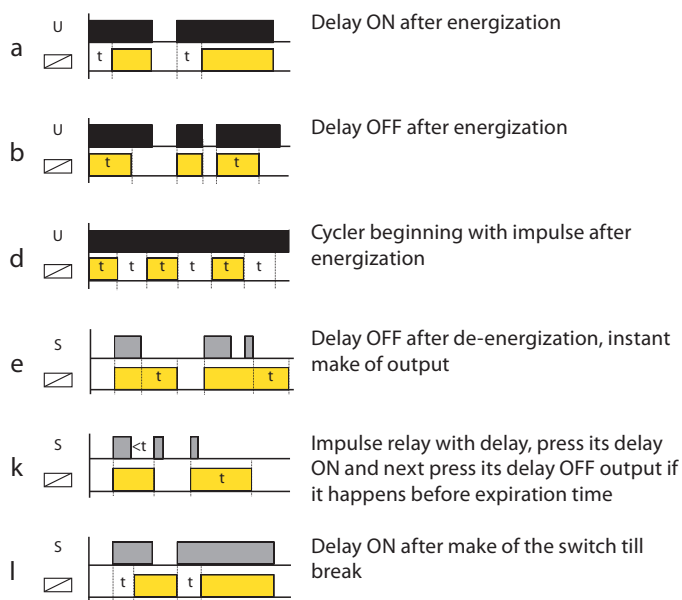

### Connection






EAN code  
 CRM-91 / 230 V: 8595188112444  
 CRM-91 / UNI: 8595188112420  
 CRM-93H / 230 V: 8595188112789  
 CRM-93H / UNI: 8595188112468  
 CRM-9S / UNI: 8595188116008

Technical parameters		CRM-91H	CRM-93H	CRM-9S
Number of functions:	UNI 230	10		
Supply terminals:		A1 - A2		
Voltage range:		AC/DC 12 - 240 V (AC 50 - 60 Hz)		AC 12-240 V (50-60 Hz)
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W		AC max. 0.35VA
Voltage range:		AC 230 V / 50 - 60 Hz		x
Consumption (apparent / loss):		AC max. 12VA / 1.3W	AC max. 12VA / 1.9W	x
Supply voltage tolerance:		-15 %; +10 %		
Supply indication:		green LED		
Time ranges:		0.1 s - 10 days		
Time setting:		rotary switch and potentiometer		
Time deviation:	5 % - mechanical setting			
Repeat accuracy:	0.2 % - set value stability			
Temperature coefficient:	0.01 % / °C, at = 20 °C (0.01 % / °F, at = 68 °F)			
Output				
Number of contacts:		1x changeover/ SPDT (AgNi / Silver Alloy)	3x changeover/ SPDT (AgNi / Silver Alloy)	1x static contactless output (triac)
Current rating:		16 A / AC1	8 A / AC1	0.7 A
Breaking capacity:		4000 VA / AC1, 384 W / DC	2000 VA / AC1, 192 W / DC	x
Inrush current:		30 A / < 3 s	10 A / < 3 s	60 A / < 10 ms
Switching voltage:		250 V AC1 / 24 V DC		x
Voltage drop on switch:		x		max. 0.9 V at I max.
Load on B1 terminal:		x		Yes / I max. 0.7 A
Output indication:		multifunction red LED		
Mechanical life:		3x10 <sup>7</sup>		> 10 <sup>8</sup>
Electrical life (AC1):		0.7x10 <sup>5</sup>		>10 <sup>8</sup>
Controlling				
Power on control input:		AC 0.025 - 0.2 VA / DC 0.1 - 0.7 W (UNI), AC 0.53 VA (AC 230 V), AC 0.025 - 0.2 VA (AC 12 - 240 V)		
Load between S-A2:		Yes		
Control. terminals:		A1-S		
Glow tubes connections:		230 V - Yes / UNI - No		x
Max. amount of glow lamps connected to controlling input:		UNI - glow lamps cannot connected/NO 230 V - max.20 pcs (measured with glow lamp 0.68 mA / 230 V AC)		glow lamps cannot connected/NO
Impulse length:		min. 25 ms / max. unlimited		
Reset time:		max. 150 ms		max. 250 ms
Other information				
Operating temperature:		-20 °C to +55 °C (-4 °F to 131 °F)		
Storage temperature:		-30 °C to +70 °C (-22 °F to 158 °F)		
Electrical strength:		4kV (supply-output)		x
Operating position:		any		
Mounting:		DIN rail EN 60715		
Protection degree:		IP40 from front panel / IP20 terminals		
Overvoltage category:		III.		
Pollution degree:		2		
Max. cable size (mm²):		solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)		
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		
Weight:		(UNI)-64 g (2.26 oz.); (230)-62 g (2.2 oz.)	(UNI)-89 g (3.1 oz.); (230)-87 g (3 oz.)	51 g (1.8 oz.)
Standards:		EN 61812-1, EN 61010-1		


- Multifunction time relay can be used for electrical appliances, control of lights, heating, motors, pumps and fans (10 functions, 10 time ranges, multi-voltage, 16 A or 3x 8 A contacts)
- Fulfills all requirements for time relays
- 10 functions:
  - 5 time functions controlled by supply voltage
  - 4 time functions controlled by control input
  - 1 function of latching relay
- Comfortable and well-arranged function and time-range setting by rotary switches
- Time scale 0.1 s - 10 days divided into 10 ranges: (0.1 s - 1 s / 1 s - 10 s / 0.1 min - 1 min / 1 min - 10 min / 0.1 hrs - 1 h / 1 h - 10 hrs / 0.1 day - 1 day / 1 day - 10 days / only ON / only OFF)
- CRM-91H, CRM-93H:**
  - universal supply voltage AC/DC 12 - 240 V or AC 230 V,
  - Output contact: CRM-91H: 1x changeover/SPDT 16 A; CRM-93H: 3 x changeover/SPDT 8 A
- CRM-9S:**
  - universal supply voltage AC 12 - 240 V AC 12 - 240 V, absolutely noise-less switching
  - 1x static contactless output (triac) 0.7 A (60 A / < 10 ms), switches potential A1
- Multifunction red LED output indicator flashes or shines depending on the status of output
- 1-MODULE, DIN rail mounting

## Description

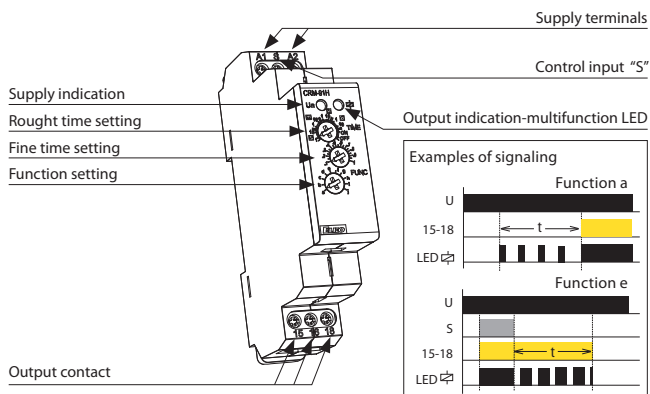


## Connection



CRM-91H



CRM-93H



CRM-9S




### Possibility to connect load onto controlling input


It is possible to connect the load (e.g.: contactor) between terminals S-A2, without any interruption of correct relay function.

## Symbol


CRM-91H



CRM-93H



CRM-9S



## Function



## On Delay (Power On)

When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed. Trigger switch is not used in this function.



## Off Delay

When input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state. Trigger switch is not used in this function.



## Repeat Cycle (Starting Off)

When input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.



## Repeat Cycle (Starting On)

When input voltage U is applied, relay contacts R change state immediately and time delay t begins. When time delay t is complete, contacts return to their shelf state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.




## Off Delay (S Break)

Input voltage U must be applied continuously. When trigger switch S is closed, relay contacts R change state. When trigger switch S is opened, delay t begins. When delay t is complete, contacts R return to their shelf state. If trigger switch S is closed before time delay t is complete, then time is reset. When trigger switch S is opened, the delay begins again, and relay contacts R remain in their energized state. If input voltage U is removed, relay contacts R return to their shelf state.




## Single Shot

Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. During time-out, the trigger signal S is ignored. The relay resets by applying the trigger switch S when the relay is not energized.



## Single Shot Trailing Edge (Non-Retriggerable)

Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. At the end of the preset time t, the relay contacts R return to their normal condition unless the trigger switch S is opened and closed prior to time out t (before preset time elapses). Continuous cycling of the trigger switch S at a rate faster than the preset time will cause the relay contacts R to remain closed. If input voltage U is removed, relay contacts R return to their shelf state.



## On/Off Delay

Input voltage U must be applied continuously. When trigger switch S is closed, time delay t begins. When time delay t is complete, relay contacts R change state and remain transferred until trigger switch S is opened. If input voltage U is removed, relay contacts R return to their shelf state.



## Latching relay

Input voltage U must be applied continuously. Output changes state with every trigger switch S closure. If input voltage U is removed, relay contacts R return to their shelf state.




## Pulse generator

Upon application of input voltage U, a single output pulse of 0.5 seconds is delivered to relay after time delay t. Power must be removed and reapplied to repeat pulse. Trigger switch is not used in this function.

pulse = 0.5 s

## Time ranges



0.1 - 1 s

1 - 10 s

0.1 - 1 min

1 - 10 min

0.1 - 1 h

1 - 10 hrs

0.1 - 1 day

1 - 10 days

only ON

only OFF

## Notes

1) Output contacts of CRM-93H do not allow switching of different phases or 3-phase voltages (voltage > 250 V).

2) When mounting into steal-plated switchboards, it is necessary to keep a safety distance of min. 3 mm from terminal's screws 35-36-38 and 25-26-28 towards the shutter of a switchboard.



NEW



EAN code  
CRM-100: 8595188174534

- Digital multifunction relay can be used for controlling lights, heating, motors, pumps, machines and appliances where you need set time functions.
- 17 most used functions.
- Thanks to digital display and settings you exact set required time (without any mechanical tolerance).
- Time range 0.1 s - 999 hours
- Universal power supply 24-240 V AC/DC brings you variability of powering.
- 1x 8 A changeover contact.
- Visible time function for non-autoritized.
- 1-MODULE, DIN rail mounting.

Technical parameters	CRM-100
----------------------	---------


Number of functions:	17
Supply terminals:	A1 - A2
Voltage range:	AC/DC 24-240 V (50-60 Hz)
Consumption (apparent / loss):	AC 1-4 VA / DC 1-3 W
Supply voltage tolerance:	-15 %; +10 %
Time ranges:	0.1 s - 999 hrs.
Time setting:	Buttons SET / ADJ
Repeat accuracy:	± 0.5 % - of selected range
Variation in timing due to voltage change:	± 2%
Variation in timing due to temperature change:	± 5%

Output	
Number of contacts:	1x C/O / SPDT (AgNi)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 192 W / DC
Inrush current:	10 A / <3s
Switching voltage:	250 V AC1/ 24 V DC
Output indication:	multifunction red LED
Mechanical life:	2 x 10 <sup>7</sup>
Electrical life (AC1):	1 x 10 <sup>5</sup>

Controlling	
Control. terminals:	A1-B1

Other information	
Operating temperature:	14 .. 131 °F (-10 .. +55 °C)
Storage temperature:	-22 .. 158 °F (-30 .. +70 °C)
Isolation (Between Input and Output):	2.5 kV
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP30 from front panel / IP20 terminals
Overvoltage cathegory:	III.
Pollution degree:	2
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)
Dimensions:	85 x 18.2 x 76 mm (3.3" x 0.7" x 2.99")
Weight:	85 g (2.99 oz.)


Description

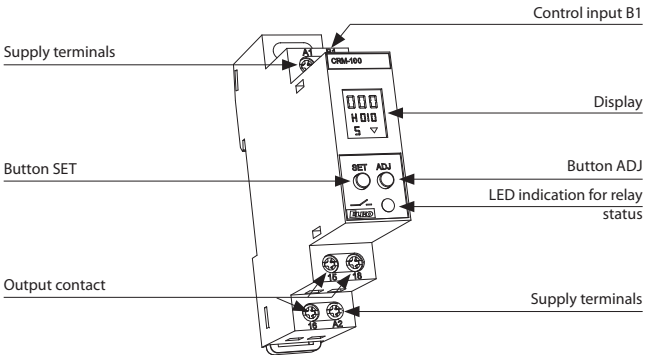


Description of displayed elements on the screen












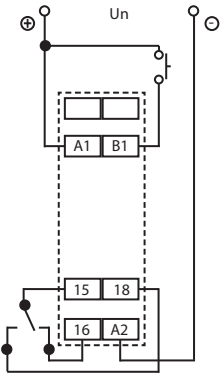







Connection



Symbol



## Function

- 0**  **ON delay [7]**  
Timing commences when supply is present. R energizes at the end of the timing period.
- 1**  **Cyclic OFF/ON {OFF Start, (Sym, Asym)} [7]**  
T-ON and T-OFF can be same or different. The relay (R) keeps on changing its status till power is removed.
- 2**  **Cyclic ON/OFF {On Start, (Sym, Asym)} [2]**  
This function is quite similar to the function '1' but initially the relay(R) is ON for period T-ON after the power is applied.
- 3**  **Impulse ON energizing [3]**  
After power ON, R energizes and timing starts. R de-energizes after timing is over.
- 4**  **Accumulative delay ON signal [4]**  
Time commences as supply is present and switch B1 is open. Closing switch B1 pauses timing. Timing resumes when switch B1 is opened again. R energizes at the end of timing.
- 5**  **Accumulative delay ON inverted signal [5]**  
Time commences as supply is present and switch B1 is closed. Opening switch B1 pauses timing. Timing resumes when switch B1 is closed again. R energizes at end of timing.
- 6**  **Accumulative impulse ON signal [6]**  
When supply is ON, R energizes. When switch B1 is closed timing is suspended and remains suspended till switch B1 is opened again. Interrupting supply resets timer.
- 7**  **Signal ON delay [7]**  
Permanent supply required. Timing starts when switch B1 is closed. R energizes at end of timing period and de-energizes when B1 is opened.
- 8**  **Inverted signal ON delay [8]**  
Timing will commence when supply is present and switch B1 is open. R energizes after timing. If B1 is closed during timing period, timing resets to the beginning of cycle.
- 9**  **Signal OFF delay [9]**  
Permanent supply is required. R energizes when switch B1 is closed. Timing commences after S is opened and then the relay de-energizes.
- A**  **Impulse ON/OFF [8]**  
Permanent supply is required. R energizes for the timing period when B1 is opened or closed. When timing commences, changing state of B1 does not affect R but resets timer.
- B**  **Signal OFF/ON [8]**  
When switch B1 is closed or opened for preset time T, the relay changes its state after time duration T.
- C**  **Leading edge impulse1 [7]**  
A permanent supply is needed. When B1 is closed, output relay energizes until timing irrespective of any further action of B1.
- D**  **Leading edge impulse2 [7]**  
Permanent supply required. when switch B1 is closed, and remains closed output relay energizes until timing is over. If B1 is opened during timing, R resets.
- E**  **Trailing edge impulse1 [7]**  
Permanent supply required. when B1 is opened, R energizes and de-energizes when timing is over. If B1 is closed during timing R resets.
- F**  **Trailing edge impulse2 [7]**  
Permanent supply required. When switch B1 is opened, R energizes and will de-energize when timing is over. If B1 is pulsed during timing period it will have no effect on R.
- G**  **Delayed impulse [6]**  
When switch B1 is closed, T<sub>OFF</sub> starts. Relay energizes at the end of T<sub>OFF</sub> period. Then, T<sub>OFF</sub> starts irrespective of signal level and relay de-energizes at the end of T<sub>ON</sub> period.



EAN code  
 CRM-91HE /UNI + potentiometr: 8595188142052  
 CRM-2HE /UNI + potiometer: 8595188142069  
 Potentiometr for CRM-91HE, CRM-2HE : 8595188125215

Technical parameters	CRM-91HE	CRM-2HE
Number of functions:	10	2
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Burden:	AC 0.7 - 3 VA / DC 0.5 - 1.7 W	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Time ranges:	0.1 s - 10 days	0.1 s - 100 days
Time setting:	rotary switch, external potentiometer	
Time deviation:	5% - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 % /°C, at = 20°C (0.01%/°F, at = 68°F)	

Output		
Number of contacts:	1x changeover/ SPDT (AgNi / Silver Alloy)	
Current rating:	16 A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / <3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	multifunction red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	


Controlling		
Control. voltage:	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Consumption of input:	AC 0.025-0.2 VA / DC 0.1-0.7 W	
Load between S-A2:	Yes	
Glow-tubes:	No	
Control. terminals:	A1-S	
Impulse length:	min. 25 ms / max. unlimited	
Reset time:	max. 150 ms	

Other information		
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm <sup>2</sup> ):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	77 g (2.7 oz.)	78 g (2.8 oz.)
Standards:	EN 61812-1, EN 61010-1	

Potentiometer		
Potentiometer:	47 kΩ, linear	
Protection degree:	IP 65 from front side / IP20 from back side	
Max. cable size (mm <sup>2</sup> ):	1.5 with sleeve / without sleeve max. 2.5 (AWG 12)	
Weight:	15 g (0.5 oz.)	
Dimensions:	see page Accessories	

- Control by external control unit - potentiometer (can be placed/ mounted for example on switch board doors or in panel).
- CRM-91HE:** multifunction time relays
  - 10 functions :
    - 5 time functions controlled by supply voltage
    - 4 time functions controlled by control input
    - 1 function of latching relay
  - time scale 0.1 s - 10 days divided into 10 ranges (0.1 s - 1 s / 1 s - 10 s / 0.1 min - 1 min / 1 min - 10 min / 0.1 hrs - 1 h / 1 h - 10 hrs / 0.1 day - 1 day / 1 day - 10 days / only ON / only OFF).
- CRM-2HE:** asymmetric cycler
  - 2 time functions:
    - cycler beginning with pulse
    - cycler beginning with gap
  - function selected via external wired link on control input S-A1.
- Universal supply voltage AC/DC 12 - 240 V.
- Output contact: 1x changeover 16 A/SPDT.
- 1-MODULE, DIN rail mounting.
- Possible to connect external potentiometer - max. distance 10 m (32.8 ft.) from relay


### Description

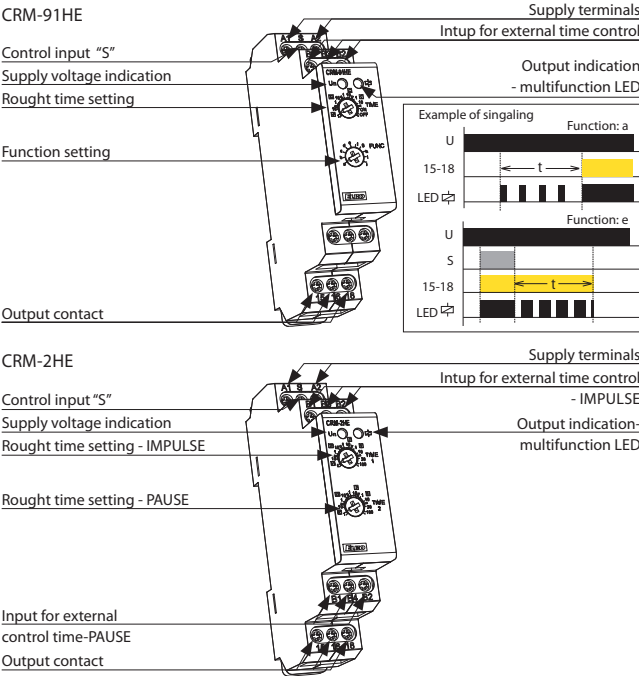


### Function

Functions of CRM-91HE are identical with CRM-91H.  
 Functions of CRM-2HE are identical with CRM-2H.

### Connection

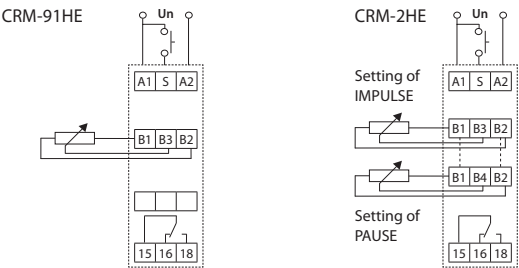

### Symbol

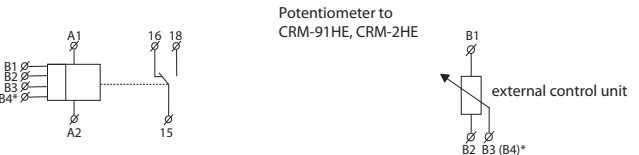

\*B4 only for CRM-2HE



EAN code  
 PRM-91H-8/UNI: 85951881135511  
 PRM-91H-11/UNI: 8595188111638  
 PRM-92H/UNI: 8595188111096  
 PRM-2H/UNI: 8595188111645

Technical parameters	PRM-91H/8	PRM-91H/11	PRM-92H	PRM-2H
Number of functions:	10			2
Supply:	pins 2 and 7	pins 2 and 10	pins 2 and 10	pins 2 and 10
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)			
Burden:	AC 0.7 - 3 VA / DC 0.5 - 1.7 W			
Supply voltage tolerance:	-15 %; +10 %			
Supply indication:	green LED			
Time ranges:	0.1 s - 10 days			0.1 s - 100 days
Time setting:	rotaty switch and potentiometer			
Time deviation:	5 % - mechanical setting			
Repeat accuracy:	0.2 % - set value stability			
Temperature coefficient:	0.01 % / °C, at = 20 °C (0.01 % / °F, at = 68 °F)			

Output		
Number of contacts:	1x changeover/ SPDT (AgNi / Silver Alloy)	2x changeover/ DPDT (AgNi / Silver Alloy)
Current rating:	16 A / AC1	8 A / AC1
Breaking capacity:	4000 VA / AC1, 384 W / DC	2000 VA / AC1, 192 W / DC
Inrush current:	30 A / < 3 s	10 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	multifunction red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	

Control		
Control. voltage:	in the supply voltage range	
Control power input:	AC 0.025 - 0.2 VA / DC 0.1 - 0.7 W (UNI)	
Load between 5-10:	Yes	
Glow-tubes:	No	
Control terminals:	2-5	
Max. capacity of cable control	0.1 μF	
- without connected glow-lamps:		
Impulse length:	min. 25 ms / max. unlimited	
Reset time:	max. 150 ms	


Other information		
Operating temperature:	-20 .. 55 °C (-4 °F .. 131 °F)	
Storage temperature:	-30 .. 70 °C (-22 °F .. 158 °F)	
Electrical strength:	2.5 kV	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel	
Overvoltage category:	III.	
Pollution degree:	2	
Dimensions:	50 x 38 x 53 mm (2" x 1.5" x 2.1")	
Weight:	57 g (2.01 oz.)	57 g (2.01 oz.) 58 g (2.05 oz.) 58 g (2.05 oz.)
Standards:	EN 61812-1, EN 61010-1	

### Time ranges

Time ranges of PRM-91H, PRM-92H are identical with CRM-91H. See page 17.  
 Time ranges of PRM-2H are identical with CRM-2H. See page 14.

- Multifunction time relays are equivalents by module types of relay, designed to standardized plump 11 or 8 pin socket
- Pin type enables easy changing, replacement older type of relays (pin-compatible) or easy changing auxiliary relay for time relays
- Multifunction time relay **PRM-91H**
  - 8 or 11 pin type
  - 10 time functions, time scale from 0.1 s to 10 days is divided into 10 ranges
  - output contact 1x 16 A / 4000 VA, 250 V AC1
- Multifunction time relay **PRM-92H**
  - 11 pin type
  - 10 time functions, time scale from 0,1 s to 10 days is divided into 10 ranges
  - output contact 2x 8 A / 2000 VA, 250 V AC1
- Asymmetric cyclers **PRM-2H**
  - 11 pin type
  - 2 time functions, time scale from 0,1 s to 100 days is divided into 10 ranges
  - output contact 2x 8 A / 2000 VA, 250 V AC1
- Universal supply voltage AC/DC 12 - 240 V
- Output indication: multif. red LED, flashing at certain states
- PLUG-IN relays

### Description

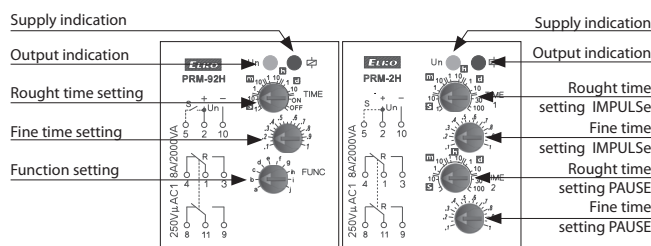


### Functions


**PRM-91H, PRM-92H:** Functions of PRM-91H, PRM-92H are identical with CRM-91H. See page 17.

**PRM-2H:** Choice Function in PRM-2H is done by connecting terminals 2 and 5.


Cycler beginning with pulse




Cycler beginning with pause



### Connection

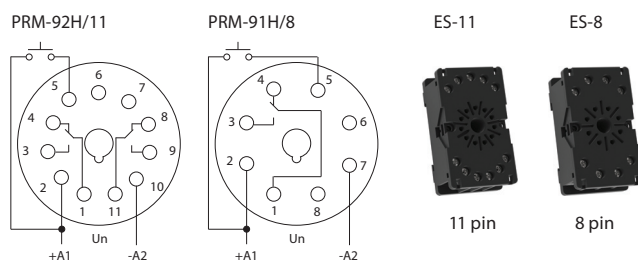

### Symbol

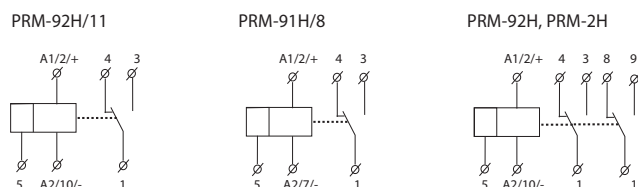

LEGEND TO DESCRIPTION  
 polarity- outputs/number on module/on socket





EAN code  
PDR-2A / 230 V: 8594030333037  
PDR-2A / UNI: 8594030333044  
PDR-2B / 230 V: 8594030333051  
PDR-2B / UNI: 8594030333068

- Multifunction programmable digital relay with 4 digit red LED display.
- Control and setting are done by 3 buttons, user-friendly menu, absolute accuracy in timer setting, time countdown on a display, galvanically separated START and STOP control inputs with UNI supply.
- Thanks to its complexity, it is possible to program also more demanding time functions by using 2 independent times.
- 2 independent times, with combination of 2 inputs and 2 outputs.
- PDR-2/A: 16 functions, choice of functions of the other relay, 30 memory places for most frequently used times.
- PDR-2/B: 10 functions, 1 output of 10 functions can be assigned to each relay = 2 relays in one device.
- 2 independent times in range: 0.01 s - 100 hrs.
- Supply voltage AC/DC 12 - 240 V or AC 230 V.
- 3-MODULE, DIN rail mounting.

Technical parameters	PDR-2/A	PDR-2/B
Function:	16	10
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Burden:	AC 0.5 - 2.5 VA / DC 0.4 - 2.5 W	
Voltage range:	AC 230 V / 50 - 60 Hz	
Consumption (apparent/loss):	AC max. 16 VA / 2.5 W	
Supply voltage tolerance:	-15 %; +10 %	
Time ranges:	0.01 s - 100 h	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 % / °C, at = 20 °C (0.01 % / °F, at = 68 °F)	

#### Output

Number of contacts:	2x changeover/ SPDT (AgNi / Silver Alloy)
Current rating:	16 A / AC1
Breaking capacity:	4000 VA / AC1, 384 W / DC
Inrush current:	30 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC
Output indication:	red LED
Mechanical life:	3x10 <sup>7</sup>
Electrical strength (AC1):	0.7x10 <sup>5</sup>


#### Control

Control input Burden:	AC 0.01 - 0.25 VA (UNI), AC 0.25 VA (AC 230 V)
Glow lamps:	No
Control. impulse length:	min. 1 ms / max. unlimited
Reset time:	max. 200 ms
Display - colour:	red
Number and height of digits:	4 positions with separating colon, height 10 mm (0.39")
Luminance:	2200 - 3800 ucd
Light wavelength:	635 nm
Brightness setting:	range 20 - 100 % in 10 steps adjustable
Memory - memory locations:	30 (PDR-2/A) / 20 (PDR-2/B) for times ranges + service function
Data stored for:	min. 10 years


#### Other information

Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP20 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")
Weight:	140 g (4.9 oz.) (230), 145 g (5.1 oz.) (UNI)
Standards:	EN 61812-1, EN 61010-1

#### Description

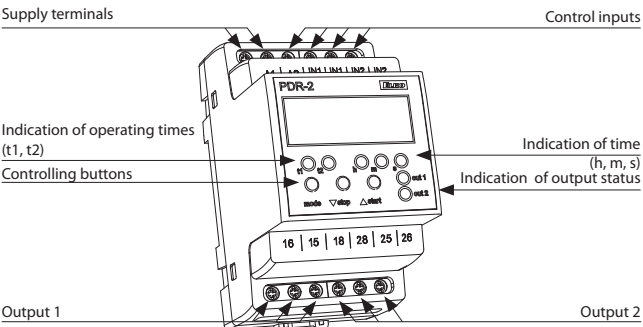

#### Symbol




#### Time data


Time range:	0.01 s - 99 h 59 min 59 sec 99 ss
Minimal time step:	0.01 s
Time deviation:	0.01 % of set value
Setting error:	0 %
Setting, reset accuracy:	100 %
Digital places:	selected via program

## Connection

PDR-2/A

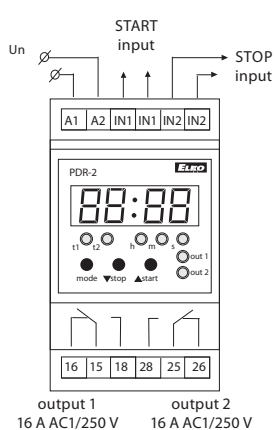


PDR-2/B

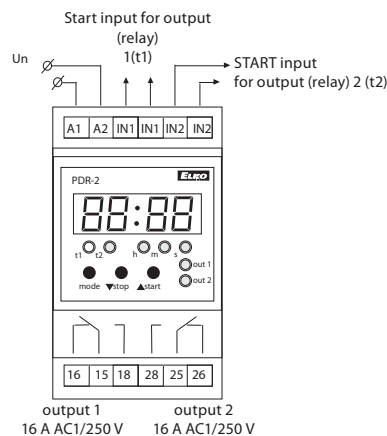


## Function

### Functions for PDR-2/A and PDR-2/B

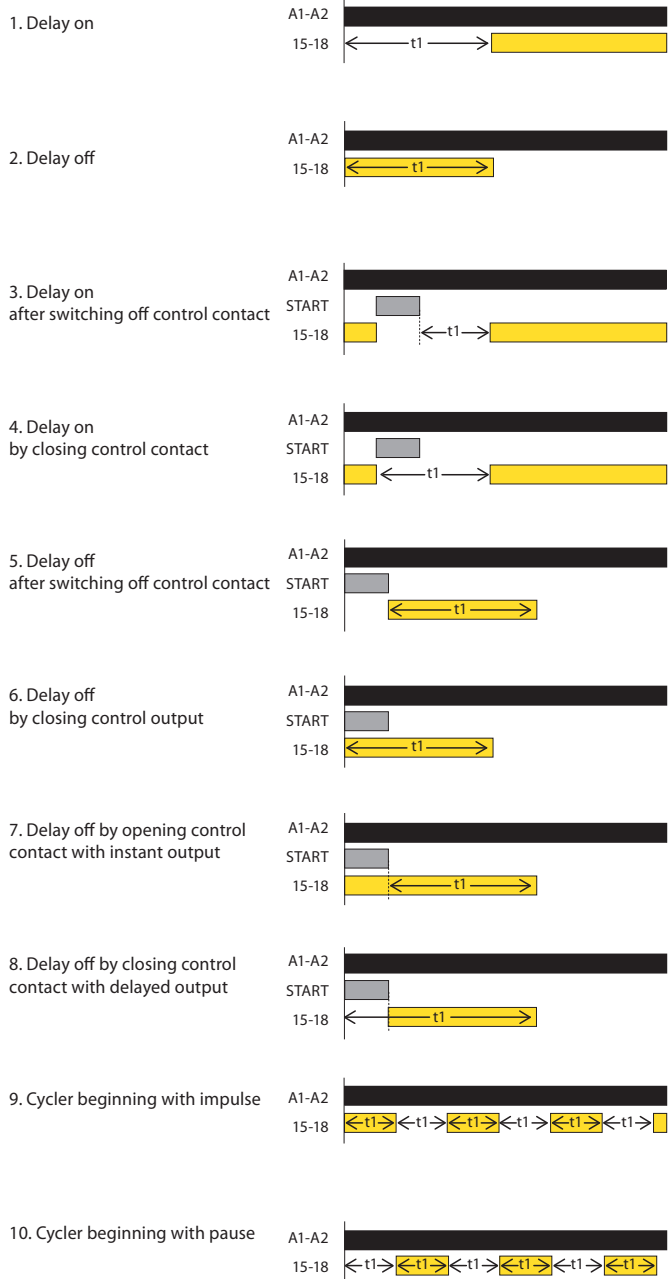

### Functions for PDR-2/A

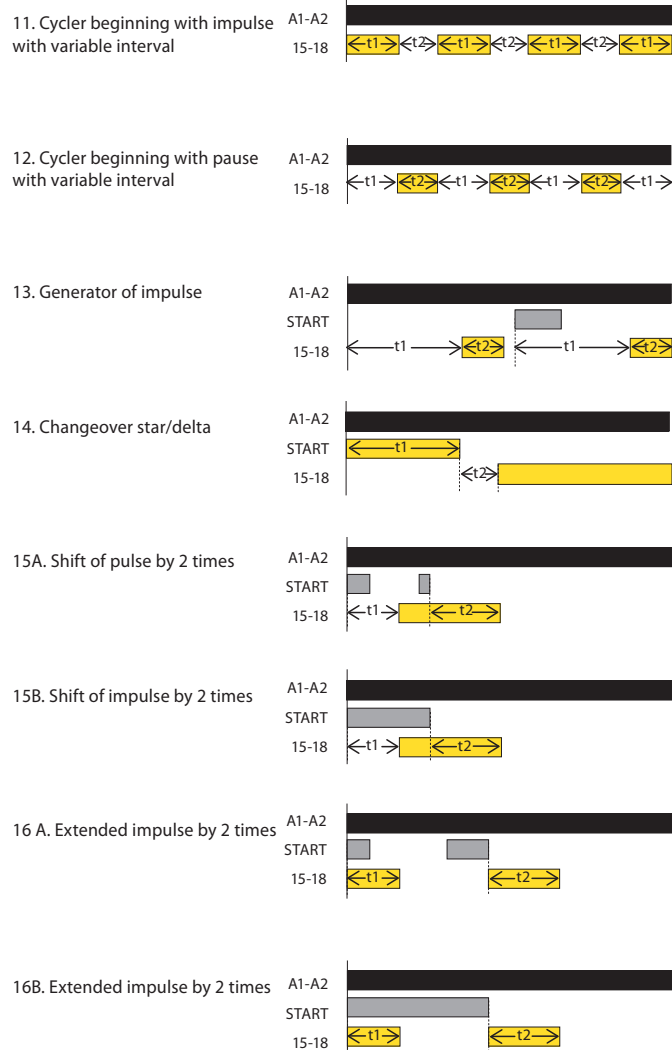

Recommendation:

PDR-2/B is replacing by 2 simple time relays = 2 in one.

EAN code  
SHT-1 /230 V: 8595188130424  
SHT-1 /UNI: 8595188130431  
SHT-1/2 /230 V: 8595188130400  
SHT-1/2 /UNI: 8595188130417  
SHT-3 /230 V: 8595188136761  
SHT-3 /UNI: 8595188136754  
SHT-3/2 /230 V: 8595188129015  
SHT-3/2 /UNI: 8595188129046




Technical parameters		SHT-1, SHT-3		SHT-1/2, SHT-3/2	
Supply terminals:		A1 - A2			
Voltage range:	UNI 230	AC/DC 12 - 240 V (AC 50 - 60 Hz)			
Burden:		AC 0.5 - 2 VA / DC 0.4 - 2 W			
Voltage range:		AC 230 V / 50 - 60 Hz			
Burden:		AC max. 14 VA / 2 W			
Supply voltage tolerance:		-15 %; +10 %			
Back-up supply:		yes			
Summer/winter time:		automatic			
Output					
Number of contacts:		1x changeover/SPDT (AgSnO <sub>2</sub> )		2x changeover/SPDT (AgSnO <sub>2</sub> )	
Current rating:		16 A / AC1			
Breaking capacity:		4000 VA / AC1, 384 W / DC			
Inrush current:		30 A / < 3 s			
Switching voltage:		250 V AC1 / 24 V DC			
Mechanical life:		> 3x10 <sup>7</sup>			
Electrical life (AC1):		> 0.7x10 <sup>5</sup>			
Time circuit					
Power back-up:		up to 3 years			
Accuracy:		max. ±1s / day at 23 °C (73.4 °F)			
Minimum interval:		1 min			
Data stored for:		min. 10 years			
Cyclic output:		1 - 99 s			
Pulse output:		1 - 99 s			
Program circuit					
Number of memory places:		100			
Program (SHT-1; SHT-1/2):		daily, weekly			
Program (SHT-3; SHT-3/2):		daily, weekly, monthly, yearly (up to year 2095)			
Data readout:		LCD display, with back light			
Other information					
Operating temperature:		-20 °C to +55 °C (-4 °F to 131 °F)			
Storage temperature:		-30 °C to +70 °C (-22 °F to 158 °F)			
Electrical strength:		4 kV (supply - output)			
Operating position:		any			
Mounting:		DIN rail EN 60715			
Protection degree:		IP10 clips, IP40 from front panel			
Overvoltage category:		III.			
Polution degree:		2			
Max. cable size (mm <sup>2</sup> ):		solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)			
Dimensions:		90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")			
Weight:		(UNI) - 130 g (4.6 oz.), (230) - 110 g (3.9 oz.)		(UNI) - 143 g (5 oz.), (230) - 125 g (4.4 oz.)	
Standards:		EN 61812-1, EN 61010-1			


- This time switch clock SHT is used to control various appliances in real time; daily, weekly, monthly and yearly mode.
- Switching: according the program (AUTO)/constantly manually, manually to next program change/random (CUBE).
- „Holiday program“ option to choose an interval when the device doesn't switch according to the standard program, but will be block during that time.
- Automatic conversion summer / winter time.
- Sealable cover of front panel, easy controlling via 4 buttons.
- 100 memory places, clear LCD display, min. interval 1 s.
- Voltage range: AC 230 V or AC/DC 12-240 V.
- Cyclic output.
- Pulse output.
- SHT-1, SHT-3: one channel version, 2-MODULE, DIN rail mounting, clamp terminals.
- SHT-1/2, SHT-3/2: two channel version, 2-MODULE, an individual program can be run on each channel.

	Output		Time programm			
	1 channel	2 channel	day	week	month	year
SHT-1	•		•	•		
SHT-1/2		•	•	•		
SHT-3	•		•	•	•	•
SHT-3/2		•	•	•	•	•


Description

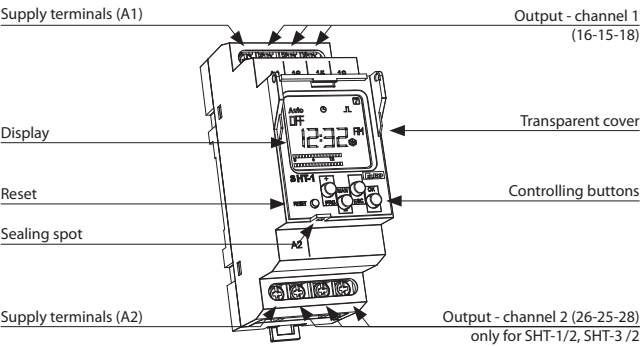


Description of displayed elements on the screen

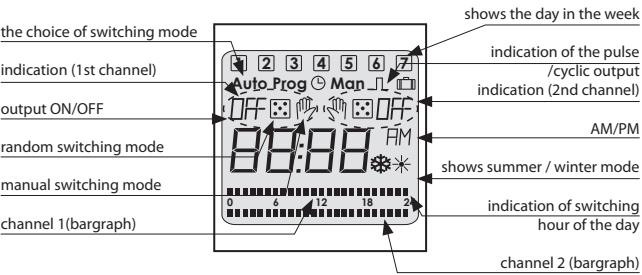

Connection

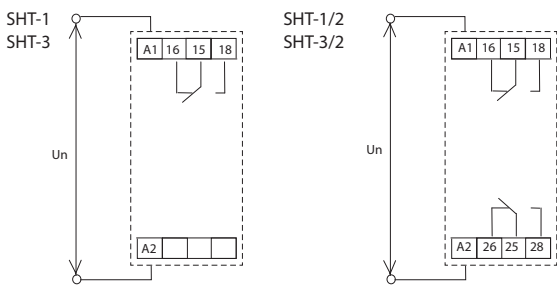

Symbol

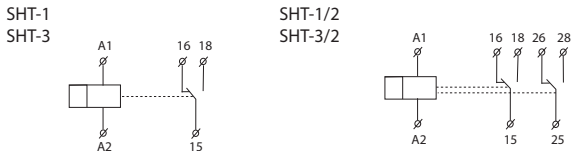



EAN code

SHT-4: 8595188144759

**Technical parameters****SHT-4**

Power supply terminals:	A1 - A2
Supply voltage:	AC 230 V / 50 - 60 Hz
Input power:	AC max. 14 VA / 2 W
Supply voltage tolerance:	-15 %; +10 %
Real time back-up:	yes
Transition to summer /winter time:	automatic

**Output**

Number of contacts:	2x changeover / SPDT (AgSnO <sub>2</sub> )
Rated current:	16 A / AC1
Switching power:	4000 VA / AC1, 384 W / DC
Peak current:	30 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC
Mechanical service life:	> 3x10 <sup>7</sup>
Electrical service life (AC1):	> 0.7x10 <sup>5</sup>

**Timing circuit**

Real time reserve:	up to 3 years
Accuracy of operation:	max. ±1 s per day, at 23°C (73 °F)
Minimum triggering interval:	1 minute
Program data storage period:	10 years at minimum

**Programming circuit**

Number of memory locations:	100
Program:	daily, yearly (until 2099)
Data display:	LCD display, backlight

**Other information**

Operating temperature:	-20.. +55 °C (-4 °F to 131 °F)
Storage temperature:	-30.. +70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (power supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP10 terminals, IP40 from front panel
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")
Weight:	126 g (4.45 oz.) - without battery
Standards:	EN 61812-1, EN 61010-1

**Plug-in module**

With battery







Without battery

Type of backup battery: CR 2032 (3V)

- used for controlling the lighting (billboards, advertisements, shop windows, etc.) with no light sensor required.

**function:**

- by entering the geographic coordinates, the lighting can be switched on/off by sunrise and sunset
  - the preset coordinates for European cities, with optional manual adjustment of the geographical coordinates
- during programming, 120 minutes may be added to the time of sunrise and sunset
  - selection of ON/OFF functions at sunrise or sunset
- astro-clock with adjustable interruption
- operating hours counter for each channel
- timer - switching on the basis of real-time.
- two-channel design, where each channel is programmable independently of the other.
- automatic switching between winter and summer time.
- sealable transparent cover on the front panel.
- data and time backup using the battery.
- battery life - up to 3 years.
- easy replacement of the backup battery through the plug-in module, no disassembling is required.
- supply voltage: AC 230 V.
- 2-MODULE, DIN rail mounting.

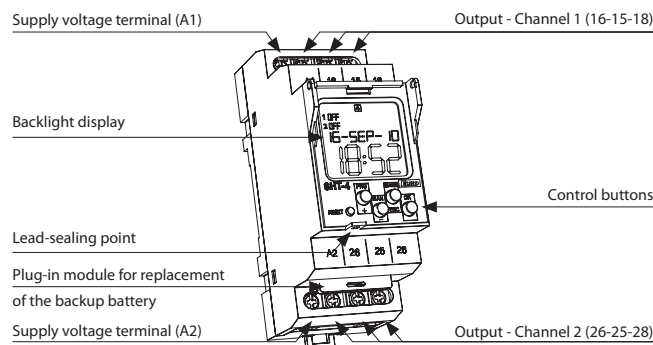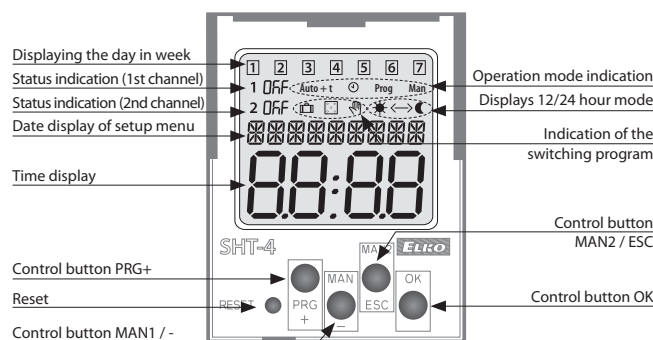**Description****Description of items displayed on the screen****Wiring****Symbol**






EAN code  
SHT-6: 8595188148382  
DCFR-1: 8595188148412


Technical parameters		SHT-6
Terminals supply:	A1 - A2	
Voltage supply:	AC 230 V / 50 - 60 Hz	
Tolerance of voltage supply:	-15 %; +10 %	
Output		
Number of contacts:	1 x changeover (AgSnO <sub>2</sub> )	
Rated current:	16 A / AC1	
Switching capacity:	4000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Max. switching voltage:	250 V AC1 / 24 V DC	
Mechanical life:	> 3x10 <sup>7</sup>	
Electrical life (AC1):	> 0.7x10 <sup>5</sup>	
Time circuit		
Backup real. time:	up to 3 years	
Running accuracy		
- without DCF receiver:	max. ±1 s per day with 23°C (73 °F)	
Minimum switching interval:	1 min	
Data retention programs:	min. 10 years	
Program circuit		
Number of memory locations:	100	
Program:	daily, yearly (till year 2099 )	
Displayed data:	LCD display with backlight	
Other information		
Working temperature:	-10.. +55 °C (14 to 131 °F)	
Storage temperature:	-30.. +70 °C (-22 °F to 158 °F)	
Dielectric strength:	4 kV (output supply)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection:	IP10 terminals, IP40 from the front panel	
Over voltage category:	III.	
Degree of pollution:	2	
Max. cable size (mm <sup>2</sup> ):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	121 g (4.27 oz.) - without battery	
Standards:	EN 61812-1, EN 61010-1	

- Used for controlling appliances depending on real time, that is synchronized by a DCF 77 signal, thanks to the automatic time settings (with DCF 77 signal) it eliminates inaccuracies and errors by time running.
- 1 channel design with external DCF receiver.
- automatic switching between winter/summer time.
- sealable cover of the front panel.
- 100 memory places.
- backlit LCD display.
- switching according to the program: auto / manual / random / holiday program.
- Function of the operating hours counter.
- backing up data and time using the battery.
- reserve battery for up to 3 years.
- Easy replacement for the backup battery with plugging module without dismantling the device.
- Power supply: AC 230 V.
- 2-MODULE, mounting on DIN rail.


Description

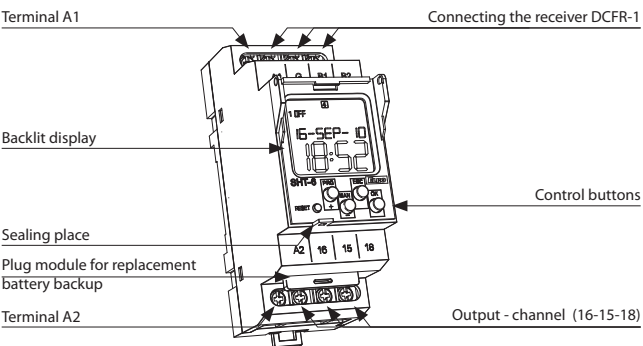


Description of the displayed elements on the screen

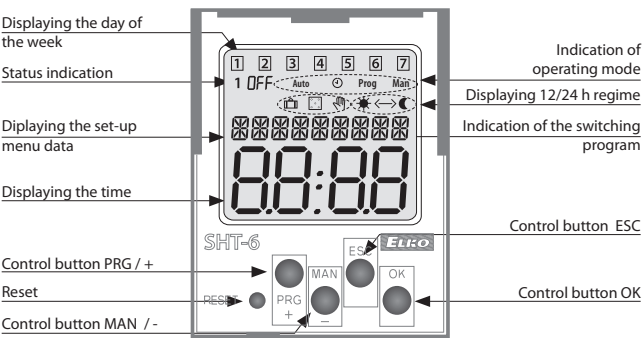

Connection

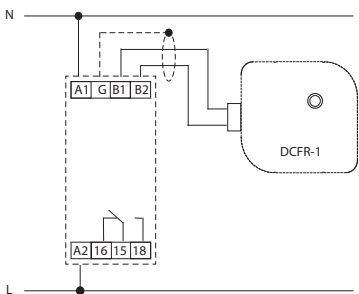

Symbol



Plug-in module



Type of backup battery: CR 2032 (3V)




- Universal DCF module, which is designed for controlling the SHT-6 timer, and other devices.
- outdoor applications (IP65 protection).
- Two-wire connection - not polarity sensitive!
- Length of connecting cable is up to 100 m (328').
- visual indication of proper function module.


EAN code  
DCFR-1: 8595188148412

Technical parameters	DCFR-1
Connection:	2 conductors
Max. cross-connection conductors:	2.5 mm <sup>2</sup>
Max voltage on the wires:	10 V
Indication Function:	red LED
Other information	
Storage temperature:	-30.. +70 °C (-22 to 158 °F)
Protection:	IP65
Dimensions:	98 x 62 x 34 mm (39.3 x 2.4 x 1.3")
Weight:	110 g (3.88 oz)
Operating position:	perpendicular to the direction of reception
The reception area:	about 1500 km from Frankfurt / Main

Description

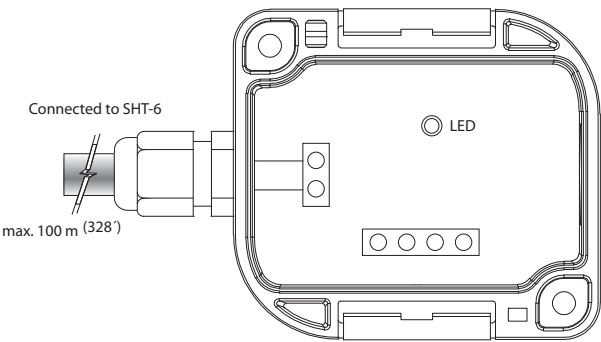

Working position - options

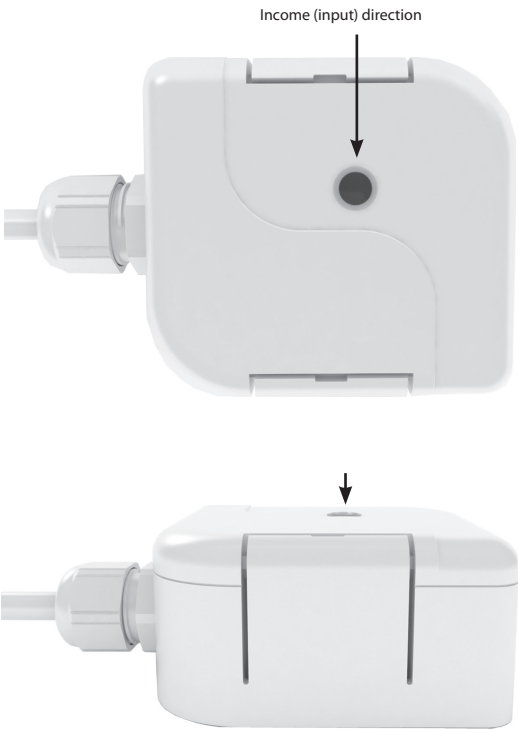

NEW




EAN code  
SHT-7: 8595188135498


Technical parameters		SHT-7
Power supply terminals:	A1 - A2	
Supply voltage:	AC 230 V / 50 - 60 Hz	
Input power:	AC max. 14 VA / 2 W	
Supply voltage tolerance:	-15 %; +10 %	
Real time back-up:	yes	
Transition to summer /winter time:	automatic	
Output		
Number of contacts:	2x changeover / SPDT (AgSnO <sub>2</sub> )	
Rated current:	16 A / AC1	
Switching power:	4000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Mechanical service life:	> 3x10 <sup>7</sup>	
Electrical service life (AC1):	> 0.7x10 <sup>5</sup>	
Timing circuit		
Real time reserve:	up to 3 years	
Accuracy of operation:	max. ±1 s per day, at 23°C (73 °F)	
Minimum triggering interval:	1 minute	
Program data storage period:	10 years at minimum	
Programming circuit		
Number of memory locations:	100	
Program:	daily, yearly (until 2099)	
Interface NFC:	daily, yearly (until 2099)	
Data display:	LCD display, backlight	
Other information		
Operating temperature:	-20.. +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30.. +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (power supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP10 terminals, IP40 from front panel	
Overvoltage category:	III.	
Polution degree:	2	
Max. cable size (mm²):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	129 g (4.55 oz.) - without battery	
Standards:	EN 61812-1, EN 61010-1	

- Digital switch timer clock with day and year program and setting via smartphone supporting NFC transfer
- Timer switch - switching based on real time in day and week mode
- 100 memory locations for on / off setting
- OFF line setting of programs in the application
- Backup / insertion into the phone memory for transfer to the next timer switch
- two-channel design, where each channel is programmable independently of the other.
- automatic switching between winter and summer time.
- sealable transparent cover on the front panel.
- data and time backup using the battery.
- battery life - up to 3 years.
- easy replacement of the backup battery through the plug-in module, no disassembling is required.
- supply voltage: AC 230 V.
- 2-MODULE, DIN rail mounting.


Description

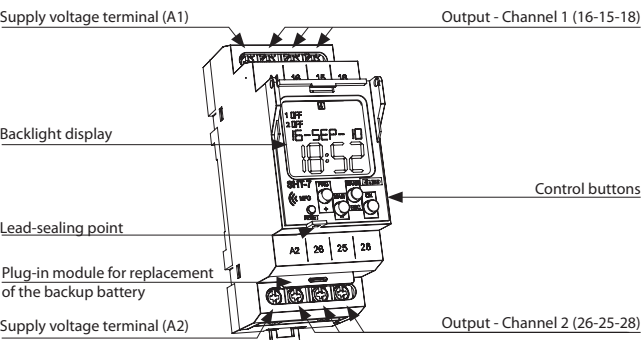


Description of items displayed on the screen

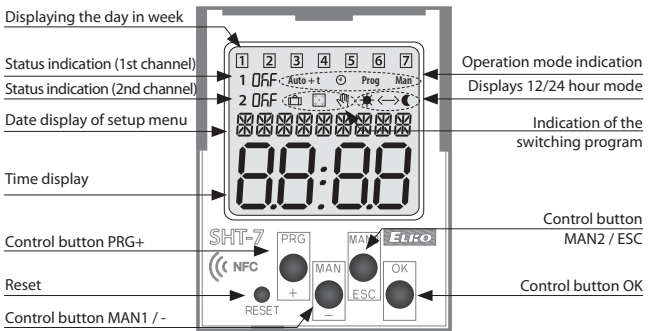

Wiring



Symbol



Plug-in module




With battery



Without battery

Type of backup battery: CR 2032 (3V)

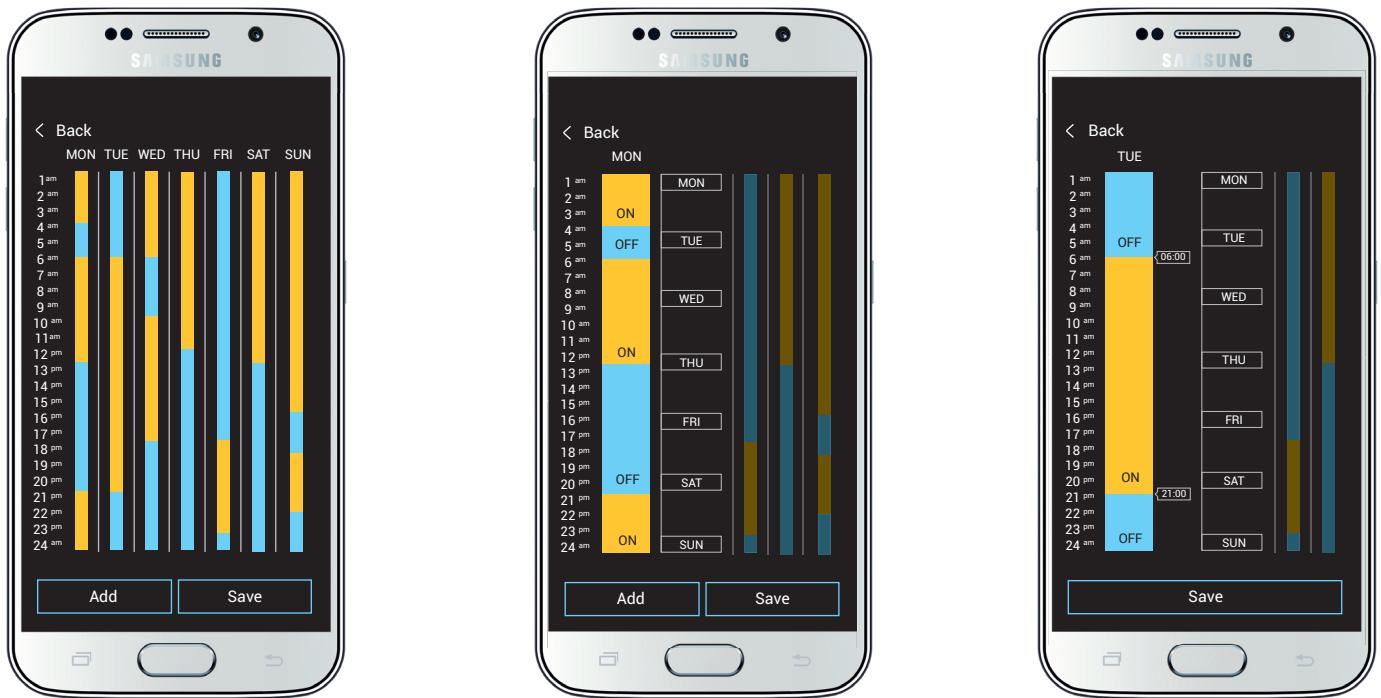

Through simple steps in the application you can set the desired on and off settings based on real time. You can copy this setting to other days, and altogether you can store up to 100 programs. The entire setup project can be saved to your smartphone and transferred to the next timer switch. The smartphone application serves not only to upload settings but also to download. The main benefit is speed and simplicity.



Near Field Communication is the way of wireless communication of two devices within a short distance of a few centimeters. A typical example of NFC is credit card payment, but now our ability to control your timing clock is also an option. You can also conveniently set it up using a smartphone and transfer these set modes to other devices, clone them or back them up.



EAN code  
 SMR-K /230 V: 8595188145176  
 SMR-T /230 V: 8595188129107  
 SMR-H /230 V: 8595188129114  
 SMR-B /230 V: 8595188135566

Technical parameters	SMR-K	SMR-T	SMR-H	SMR-B
Number of functions:	9			10
Connection:	3-wire, without neutral		4-wire, with neutral	
Voltage range:	AC 230 V / 50 - 60 Hz			
Power input (no operation/make):	0.8 / 3 VA			max. 1 / 1 VA
Supply voltage tolerance:	-15 %; +10 %			
Time ranges:	0.1 s - 10 days			
Time setting:	via rotaty switch			
Time deviation:	10 % - mechanical setting			
Repeat accuracy:	2 % - set value stability			
Temperature coefficient:	0.1 % / °C, at = 20 °C (0.1 % / °F, at = 68°F)			

Output

Number of contacts:	1 x triac		1x NO-SPST (AgSnO <sub>2</sub> )	
Resistive load:	10 - 160VA		16A 125 / 250 V AC1	
Inductive load:	10 - 100VA		8A 250V AC (cos φ > 0.4)	

Control

Control voltage:	AC 230 V		AC 230V, UNI 5-250 V AC/DC
Control current:	25µA	3 mA	
Impulse length:	min. 50 ms / max. unlimited		
Glow tubes connetions:	x	Yes	
Max. amount of glow lamps connected to controlling input:	230 V - max. amount 50 pcs (measured with glow lamp 0.68 mA/230 V AC)		

Other information


Operating temperature:	0.. +50 °C (+32.. +122 °F)		
Operating position:	any		
Mounting:	free at connecting wires		
Protection degree:	IP 30 in standard conditions*		
Overvoltage category:	III.		
Pollution degree:	2		
Fuse:	F 1 A / 250 V		x
Connection wires (cross-section / lenght):	3x CY, 0.75 mm <sup>2</sup> (AWG 18) 90 mm (3.5")	4x sol. wir., 0.75 mm <sup>2</sup> (AWG 18) 90 mm (3.5")	2x CY, 0.75mm <sup>2</sup> (AWG 18), 2x CY, 2.5 mm <sup>2</sup> (AWG 10), 90 mm
Glow-lamps in control button:	x	max. 10	max. 20
Dimensions:	49 x 49 x 13 mm (1.9" x 1.9" x 0.5")		49 x 49 x 21 mm (1.9" x 1.9" x 0.8")
Weight:	26 g(0.92 oz.)	26 g(0.92 oz.)	27 g(0.95 oz.) 53 g (1.9 oz.)
Standards:	EN 61812-1, EN 61010-1		

\* for more information see page 41


- Multifunction relay designed for installation into a wiring box or under wall-switch in an existing electrical installation.
- Advantageous and fast solution for exchanging standard wall-switch for a switch controlled by time or for an impulse relay controlled by a button.
- More information about type and size of load for these products can be found on page 157.
- **SMR-K**
  - 3-wire connection, works without the connection of a neutral conductor
  - power output: 10-160 VA
  - for flawless function of the product is necessary the presence of a load R, L or C between input S and neutral wire
- **SMR-T**
  - 3-wire connection, works without the connection of a neutral conductor
  - power output: 10 - 160 VA
  - between input S and neutral wire is possible connect any load R, L, or C - that is not necessary (unlike SMR-K)
- **SMR-H**
  - 4-wire connection
  - power output: 0 - 200 VA
- **SMR-B**
  - 4-wire connection
  - 10 functions
  - output contact 1x 16 A / 4000 VA, 250 V AC1
  - enables switching of fluorescent lights and also energy saving lights
  - suitable for switching loads greater than SMR-K, SMR-T, SMR-H, for example pulse relay, stair automatic switch, switching of ladder radiators in bathrooms
  - independent galvanically separated input AC/DC 5 - 250 V, for example for control from a security system

Description

SMR-H

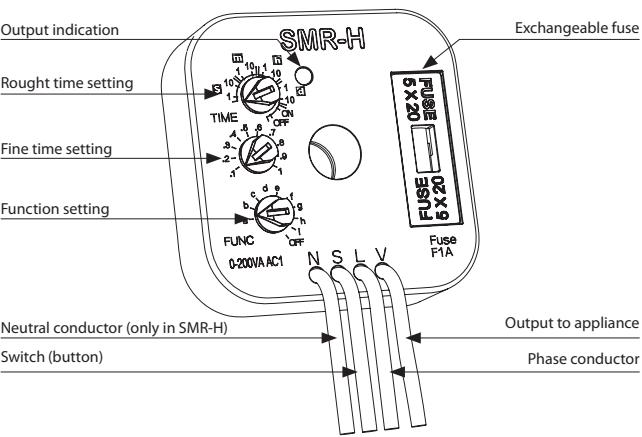

SMR-B

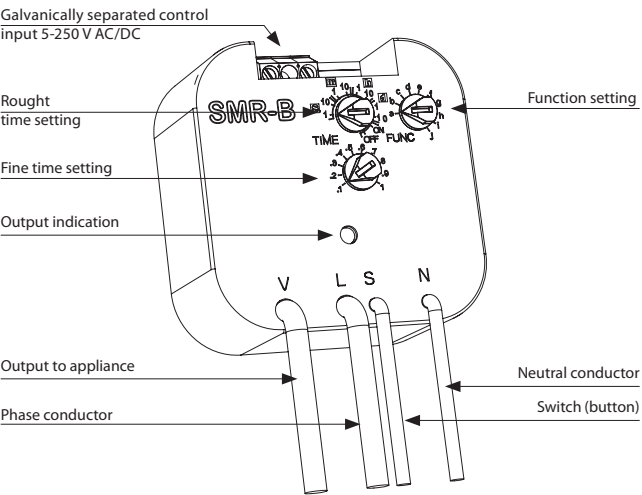



## Function

**Function a - delay off on entering edge**  
output times when it is switched. Each following pressing (max. 5x) increases time. Long pressing swithes output off



**Function b - delay off on downward edge**  
output times after button is switched off, switches immediately



**Function c - delay off on downward edge**  
after switching off output switches on and times.



**Function d - cycler - flasher impulsem**  
output cycles in regular interval, cycler starts with an impulse



**Function e - puls shift**  
delay on after the switch is switched on and delay on after it is switched off



**Function f - delay on**  
delay on after switch is switched on until it is switched off



**Function g - impulse relay**  
switches on by a press, another pressing switches the output off. The length of pressing doesn't matter, it is possible to set reaction delay by a potentiometer and thus eliminate rebound of a button



**Function h - impulse relay with delay**  
one press switches on, another one switches the output off in case it is done before the end of timing



**Function i - cycler starting with pause**  
output cycles in regular intervals, cycler starts with a pause




**Function j\* - cycler starting with gap**  
delay ON until switched off until it is de-energized or a switch is pressed again.




Note: \*- Function j is valid only for SMR-B


## Connection SMR-K, SMR-T, SMR-H, SMR-B

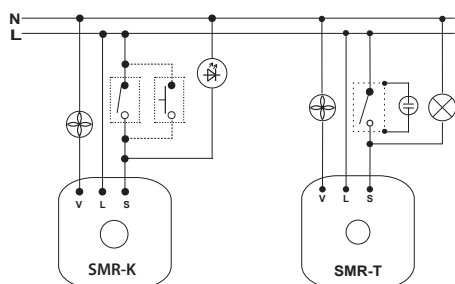


Typical wiring of SMR-K  
- timer for fan




SMR-T: Fan controlling depending on the lighting

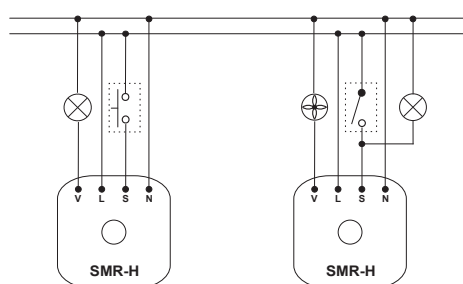

Typical wiring of SMR-H  
- timer for lamp




Fan control depending on the lighting



Input for external control voltage AC/DC 5-250 V

Note: SMR-K, SMR-T, SMR-H are not intended for switching capacity load (energy saving bulbs and LED lights with capacity power etc.), these products are only intended for switching resistive and inductive loads (incandescent bulbs, fans, etc.). SMR-B with relay output is intended to other types of load. Using this output it is possible to switch the load of R, L or C-values listed in the load table. Between inputs S and neutral wire is possible to connect any load of R, L or C, however this is not (unlike the SMR-K) condition.

## Example of connection SMR-T

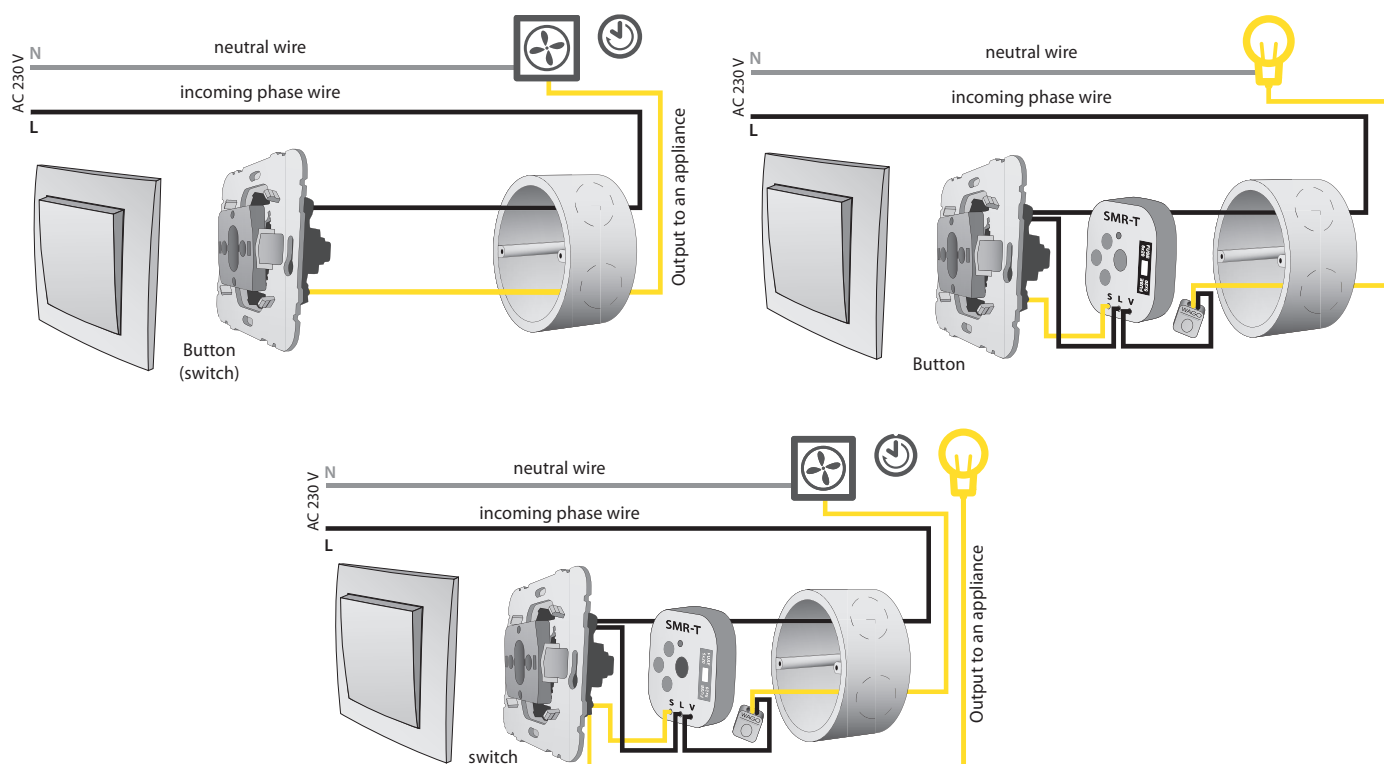




EAN code  
CRM-42/230 V: 8595188136693  
CRM-42F/230 V: 8595188146883

Technical parameters		CRM-42	CRM-42/F
Function:	delay OFF responsive to control contact switch on		
Supply terminals:	A1 - A2		
Voltage range:	AC 230 V / 50 - 60 Hz		
Burden:	AC max. 12 VA / 1.8 W		
Supply voltage tolerance:	-15 %; +10 %		
Supply indication:	green LED		
Time ranges:	0.5 - 10 min		
Time setting:	potentiometer		
Time deviation:	5 % - mechanical setting		
Repeat accuracy:	5 % - set value stability		
Temperature coefficient:	0.05 % / °C, at = 20 °C (0.05 % / °F, at = 68 °F)		
Output			
Number of contacts:	1x NO - SPST (AgSnO <sub>2</sub> ), switches potencial A1		
Current rating:	16 A / AC1		
Breaking capacity:	4000 VA / AC1, 384 W / DC		
Inrush current:	30 A / < 3 s		
Switching voltage:	250 V AC1 / 24 V DC		
Output indication:	red LED		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life (AC1):	0.7x10 <sup>5</sup>		
Electrical life (AC5b):	8x10 <sup>4</sup> (bulbs 1000 W) *		
Control			
Control voltage:	AC 230 V		
Input Burden:	AC 0.53 VA		
Glow tubes connetions:	Yes		
Max. amount of glow lamps connected to controlling input:	230 V - max. amount 50 pcs (measured with glow lamp 0.68 mA / 230 V AC)		
Control. terminals:	A1-S or A2-S		
Impulse length:	min. 50 ms / max. unlimited		
Reset time:	max. 150 ms		
Other information			
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)		
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel / IP10 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5, (AWG 12)		
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		
Weight:	65 g (2.3 oz.)		
Standards:	EN 60669-2-3, EN 61010-1		


- Intelligent staircase switch, the same use as CRM-4, but with enlarged possibility of control in mode „PROG“, it is possible to select time of delayed OFF by number of button pressing. Each pressing multiplies time set by potentiometer, it means that in case you set time to 5 min and press the button 3 times, then the output is automatically prolonged to 15 min. Output can be also switched off before time (reset) by long pressing of button (longer than 2 sec).
- Output relay contact 16 A/AC1 with inrush current up to 80 A enables switching of el. bulbs and also fluorescent lights.
- Operating system switch:
  - ON - output is constantly ON (service mode).
  - AUTO - timing according to adjusting by potentiometer in range 30 s - 10 min.
  - PROG - timing with time prolongation option by number button pressing.
- Timing (in mode AUTO and PROG) is possible to be stopped by long pressing of the button (> 2 s).
- Voltage range: AC 230 V, clamp terminals.
- Output indication: multif. red LED, flashing at certain states
- 3-wire or 4-wire connection (it is possible to control input S by potential A1 or A2).
- **CRM-42:** Warning before switch OFF- output doubleflash 40 and 30 sec before switch OFF.
- **CRM-42F:** Staircase switch without warning flashes especially suited for use with energy-saving lamps, where frequent flashing may cause damage to the light source.
- 1- MODULE, DIN rail mounting.

Description

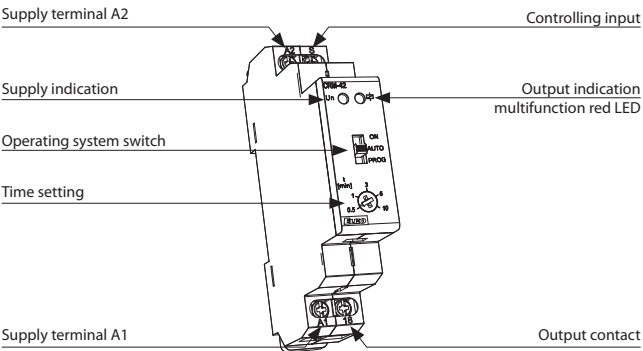


Connection


3- wire connection



4- wire connection



Symbol




\* For bigger bulb loads and frequent switching is recommended to intensify the contact relay with power contactor e.g. VSXXX

## Function

## MODE ON

- the output is permanently closed in ON position. Control input is blocked.


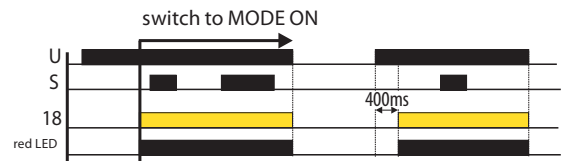


## MODE AUTO

- by pressing a control button in function AUTO the output closes and after the set time period the output opens.

**CRM-42:** Warning before switch OFF- output doubleflash 40 and 30 sec before switch OFF\*

**CRM-42F:** without flashing

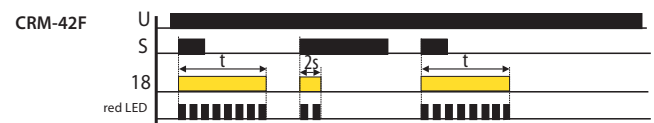
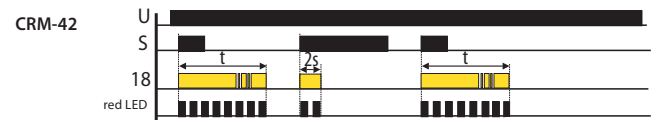


## MODE PROG (the illumination time is defined by number of button pressing)

- in function program the switched time is a sum of each time set by pressing the button. By pressing >2s the output opens.

**CRM-42:** Warning before switch OFF- output doubleflash 40 and 30 sec before switch OFF\*

**CRM-42F:** without flashing

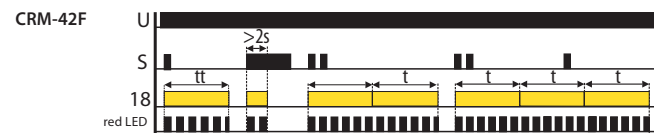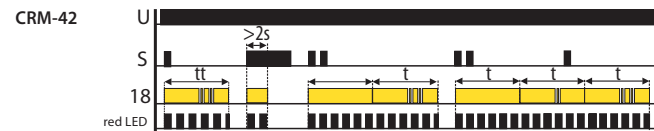

\* If the total set time is less than 1 min, there is no flashing according to the graph of the function.




EAN code  
CRM-4 / 230 V: 8595188115605


Technical parameters		CRM-4
Function:	delay off reacting to control contact switching	
Supply terminals:	A1 - A2	
Voltage range:	AC 230 V / 50 - 60 Hz	
Burden:	AC max. 12 VA / 1.8 W	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Time ranges:	0.5 - 10 min	
Time setting:	potentiometer	
Time deviation:	10 % - mechanical setting	
Repeat accuracy:	5 % - set value stability	
Temperature coefficient:	0.05 % / °C, at = 20 °C (0.05 % / °F, at = 68 °F)	
Output		
Number of contacts:	1x changeover / SPDT (AgSnO <sub>2</sub> )	
Current rating:	16 A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Control		
Control voltage:	AC 230 V	
Power on input:	AC 0.53 VA	
Load between S-A2:	Yes	
Control terminals:	A1-S	
Glow tubes connctions:	Yes	
Max. amount of glow lamps connected to controlling input:	max. amount 35 pcs (measured with glow lamp 0.68 mA / 230 V AC)	
Impulse length:	min. 25 ms / max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	62 g (2.2 oz.)	
Standards:	EN 60669-2-3, EN 61010-1	

- Used for delayed switching of lights in the corridors, entrances, stairways, halls or for delayed finish of fans (WC, bathroom, etc.).
- It is controlled by a button or by several buttons from more places (connected in parallel), buttons can be equipped by glow lamps (max. 20 pcs of glow lamps).
- Output relay contact 16 A / AC1 with surge current up to 80 A enables switching of el. bulbs and fluorescent lamps.
- Operating system switch:
  - AUTO - normal function according to set time.
  - OFF - permanently OFF (e.g. when changing bulbs).
  - ON - permanently ON (e.g. while cleaning, servicing).
- Time range: 0.5 - 10 min.
- Time setting by potentiometer.
- Supply voltage : AC 230 V.
- Protection against button blocking (e.g. a match inserted in a button).
- 1- MODULE, DIN rail mounting.


Description

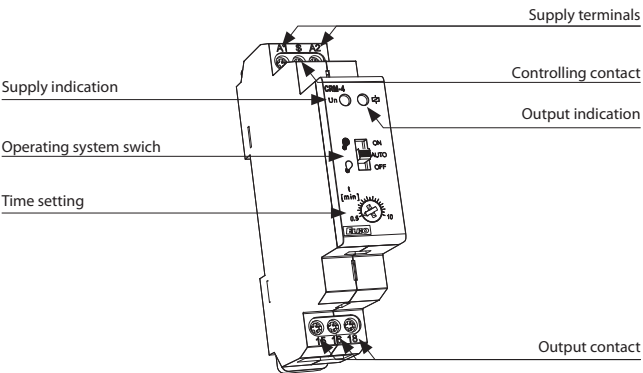


Circuit connection

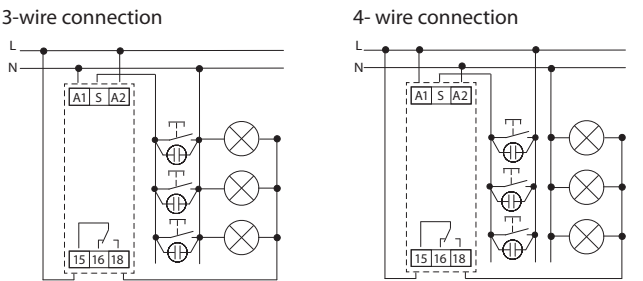

Symbol

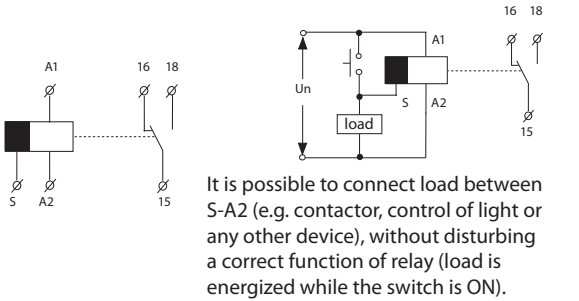

Function

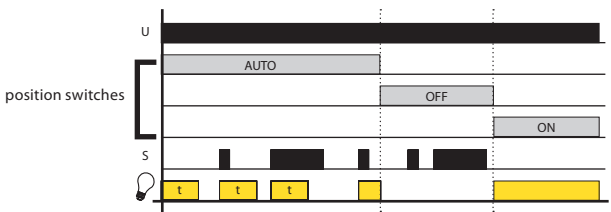

## VS(B,K)



**VS116B/230**  
Supply voltage:  
AC 230 V  
Output contact:  
1x changeover/ SPDT 16 A.



**VS116K**  
Supply voltage:  
AC 230 V and AC/DC 24 V  
Output contact:  
1x changeover/ SPDT 16 A.



**VS308K**  
Supply voltage:  
AC 230 V and AC/DC 24 V  
Output contacts:  
3x changeover/ TPDT 8 A.



**VS316/24**  
Supply voltage:  
AC/DC 24 V  
Output contacts:  
3x changeover/TPDT  
16 A, possibility to be  
connected into 3-phase  
circuit.



**VS316/230**  
Supply voltage:  
AC 230 V  
Output contacts:  
3x changeover/ TPDT  
16 A, possibility to be  
connected into 3-phase  
circuit.

## VS(U)




**VS116U**  
Supply voltage:  
AC/DC 12-240 V  
Output contact:  
1x changeover/SPDT 16 A.



**VS308U**  
Supply voltage:  
AC/DC 12-240 V  
Output contacts:  
3x changeover/ TPDT 8 A.

## 782L




**782L**  
Power relays plug-in  
Output contacts: 4 x  
changeover contact/  
SPDT 6 A.  
Plug-in type.



**ES-15/4N - socket**  
Max. voltage: 12 A  
Weight: 59 g  
Mounting to DIN rail  
Intended for 4-contact relay.

## 750L



**750L**  
Power relays plug-in  
Output contacts:  
3 x changeover contact /  
SPDT 10 A.  
Plug-in type.



**ES-11- socket**  
Max. current: 10 A  
Weight: 60 g  
Mounting to DIN rail  
Intended for 3-contact  
relay.

## Overview table

Type	Design	Coil voltage	Output contact	Other features			Designation	Page of catalogue
				LED signal light	RC unit	Parallel diode		
VS116B/230	MINI	AC 230 V/50-60 Hz	1x16 A changeover/ SPDT	●	x	x	VS116/B230 MINI, with installation into junction box or ceiling that allows control of lights, shades or awnings drives	36
VS116K	1M-DIN	AC 230 and AC/DC 24 V	1x16 A changeover/ SPDT	●	●	●	as a separation relay (4kV), direct switching of appliances up to 4000 VA (e.g. heaters), well visible signalization, noiseless	36
VS116U	1M-DIN	AC/DC 12..240 V	1x16 A changeover/ SPDT	●	●	●	as VS116K, but multivoltage supply coil	36
VS308K	1M-DIN	AC 230 and AC/DC 24 V	3x 8 A changeover/ TPDT	●	●	●	a "multiplication" of contacts, 3x changeover contact/ 3PDT only in 1-MODULE, well visible signalization, noiseless	36
VS308U	1M-DIN	AC/DC 12..240 V	3x 8 A changeover/ TPDT	●	●	●	as VS308K, but multivoltage supply coil	36
VS316/24	1M-DIN	AC/DC 24 V	3x16 A changeover/ TPDT	●	●	●	3x changeover contact in 1-MODULE, possibility of "multiplication" of contacts and in the same time possibility of switching high output, possibility of 3 phase switching	36
VS316/230	1M-DIN	AC 230 V	3x16 A changeover/ TPDT	●	●	●	as VS316/24, but AC 230 V	36
782L	PLUG-IN	AC 6-230 V, DC 6-110 V	4x6 A changeover/ 4PDT	●	x	x	compact small relay for installation into plug relay, basic version equipped by LED indication, detent and testing lever	38
750L	PLUG-IN	AC 6-230 V, DC 6-110 V	3x10 A changeover/ 3PDT	●	x	x	as 782L, but into 11-pin round socket, 3x changeover contact / 3PDT 10A/250 V	38

More about contact loadability on page 158.





VS116K



VS116B


Type	Current rating	Number of contacts	Design	Supply terminals
VS116K	16 A	1	DIN (1M)	A1 - A2 230 V AC/ A1 - A3 24 V AC/DC
VS116U	16 A	1	DIN (1M)	A1 - A2 12- 240 V AC/DC
VS116B/230	16 A	1	BOX (MINI)	L-N 230 V AC
VS308K	8 A	3	DIN (1M)	A1 - A2 230 V AC/ A1 - A3 24 V AC/DC
VS308U	8 A	3	DIN (1M)	A1 - A2 12- 240 V AC/DC
VS316/24	16 A	3	DIN (1M)	A1 - A2 24 V AC/DC
VS316/230	16 A	3	DIN (1M)	A1 - A2 230 V AC

- Power relay used for switching larger load output, strengthen or „multiplying“ contacts of the existing device.
- Relays VS316/24, VS316/230 enable connection to a 3-phase circuit.
- In the design 1-MODULE , DIN rail mounting, output status indicated by high intensity LED with choice of LED color (red, green, yellow, blue or white LED\*).
- VS116/B230 MINI, mounting in installation box or ceilings, enabling switching of lights, motors for blinds or awnings.
- For VS116/B230 status of output indicated by LED on front panel of device.


Technical parameters	VS116B/230	VS116K	VS116U	VS308K	VS308U	VS316/24	VS316/230
Supply terminals:	L-N			A1 - A2			
Voltage range:	AC 230 V / 50-60 Hz	AC 230 V / 50-60 Hz	AC/DC 12-240 V / 50-60 Hz	AC 230 V / 50-60 Hz	AC/DC 12-240 V/ 50-60 Hz	AC/DC 24 V / 50-60 Hz	AC 230 V / 50-60 Hz
Burden:	AC max. 7.5 VA / 1W	AC max. 7.5 VA / 1W	AC 0.7 - 3 VA / DC 0.5 - 1.7 W	AC max. 10.3 VA / 1.1 W	AC 0.7 - 3 VA/ DC 0.5 - 1.7 W	1.6 VA / 1.2 W	2.5 VA
Supply terminals:	x	A1-A3	x	A1-A3		x	
Voltage range:	x	AC/DC 24 V (50-60 Hz)	x	AC/DC 24 V (50-60 Hz)		x	
Burden:	x	AC 1 VA/ DC 1W	x	AC 1 VA/ DC 1W		x	
Supply voltage tolerance:	-15%; +10%						
Output							
Number of contacts:	1 x changeover/ SPDT (AgSnO <sub>2</sub> )			3 x changeover/TPDT (AgNi / Silver Alloy)		3 x changeover/ TPDT (AgSnO <sub>2</sub> )	
Current rating:	16 A/ AC1			8 A/ AC1		16A/ AC1	
Breaking capacity:	4000VA/ AC1, 384W/ DC			2000VA/ AC1, 192W/ DC		4000VA/ AC1, 384W/ DC	
Inrush current:	30 A/ <3s			10 A/ <3s		30 A/ <3s	
Switching voltage:	250 V AC1/ 24 V DC						
Output indication:	red LED	high intensity of LED					
Mechanical life:	3x10 <sup>7</sup>					1x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>					1x10 <sup>5</sup>	
Time between switching:	min. 2s					20 ms	50 ms
Other information							
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)						
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)						
Electrical strength:	4 kV (supply-output)						
Operating position:	any						
Mounting:	free at connecting wire	DIN rail EN 60715					
Protection degree:	IP 30	IP40 from front panel / IP20 terminals					
Overvoltage category:	III.						
Pollution degree:	2						
Max. cable size (mm²):	2x 0.75 mm² (AWG 18), 3x 2.5 mm² (AWG 10)	max.1x 2.5 or 2x1.5 max. 1x2.5 (AWG 12)					
Dimensions:	49 x 49 x 21 mm (2" x 2" x 0.8")	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")					
Weight:	48 g (1.7 oz.)	54 g (1.9 oz.)	58 g (2.05 oz.)	78 g (2.75 oz.)	83g (2.9 oz.)	90 g (3.17 oz.)	92 g (3.3 oz.)
Standards:	EN 61810-1, EN 61010-1						

Symbol


VS116B/230




VS116K




VS116U



VS308K




VS308U, VS316/24, VS316/230




## Description


VS116K, VS116U

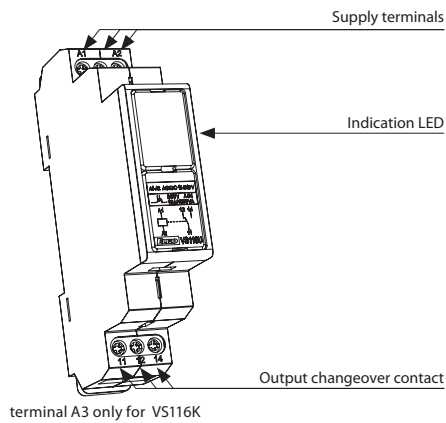


VS308K, VS308U

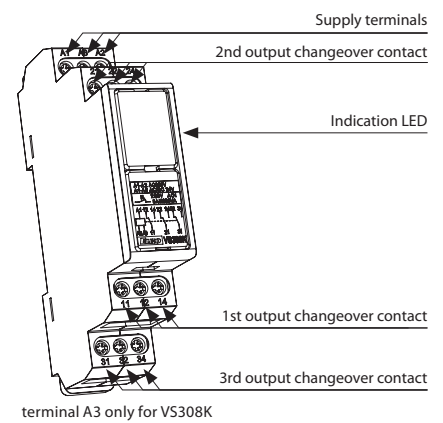

VS316/24, VS316/230

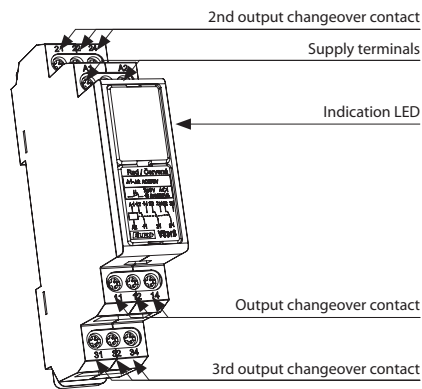

VS116B/230

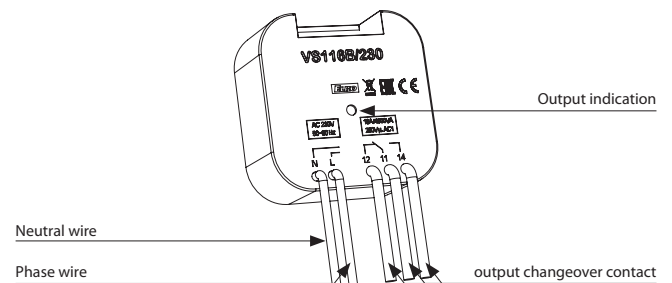

## EAN codes

VS116B/230 8595188147545

VS116K /red	8595188122597	VS308K /red	8595188122696	VS316 /24 red	8595188135771
VS116K /green	8595188122610	VS308K /green	8595188122719	VS316 /24 green	8595188136105
VS116K /yellow	8595188122580	VS308K /yellow	8595188122689	VS316 /24 yellow	8595188136129
VS116K /white	8595188122573	VS308K /white	8595188122672	VS316 /24 white	8595188136099
VS116K /blue	8595188122603	VS308K /blue	8595188122702	VS316 /24 blue	8595188136112

VS116U /red	8595188124607	VS308U /red	8595188130103	VS316 /230 red	8595188135559
VS116U /green	8595188136433	VS308U /green	8595188136440	VS316 /230 green	8595188136075
VS116U /yellow	8595188138499	VS308U /yellow	8595188138529	VS316 /230 yellow	8595188136082
VS116U /white	8595188138482	VS308U /white	8595188138512	VS316 /230 white	8595188136051
VS116U /blue	8595188138475	VS308U /blue	8595188138505	VS316 /230 blue	8595188136068

## Notes

Max. time of changeover of contact is 10ms.

VS316/24 or VS316/230 enables switching of different phases or 3 phase voltage.

\* possibility to choose blue, white and yellow color of LED for power relays line VS in case of minimal order quantity 100 pcs.



750L



782L

- Used for switching a higher power (load) than the capacity of switched element = amplifier.
- For auxiliary lighting control, signalization, the relay interlockings, boilers, heaters.
- 3x changeover contacts of 10 A (AgNi) for 750L.
- 4x changeover contacts of 6 A (AgNi) for 782L.
- Recommended sockets - ES-11 socket for 750L, ES-15/4N socket for 782L.

Technical parameters	750L	782L
<b>Contacts</b>		
Number of switching contacts:	3	4
Contact material:	AgNi	AgNi
Rated voltage:	AC 250 V/440 V (50 - 60 Hz)	AC 250 V/250 V (50 - 60 Hz)
Rated current:	10 A	6 A
Peak current:	20 A	12 A
Switching capacity (AC1):	10A/250A	6A/250A
Switching capacity (AC3):	370W (single-phase motor)	125W (single-phase motor)
Switching capacity (AC15):	3A/120 V/1.5A/240 V	1.5A/120 V/0.75A/240 V
Switching capacity (DC1):	10 A / 24 V DC	6 A / 24 V DC
Switching capacity (DC13):	0.22 A / 120 V 0.1 A/250 V	0.22 A / 120 V 0.1 A/250 V
Minimum switching voltage / current:	5 mA / 5 V	5 mA / 5 V
<b>Coil</b>		
	1.5 W / DC	1.5 W / DC
Rated Voltage (DC):	12, 24, 48, 60, 110, 120, 220 V	5, 6, 12, 24, 60, 80, 125, 220 V
Rated voltage (AC, 50-60 Hz):	12, 24, 48, 60, 115, 120, 230, 240 V	12, 24, 42, 60, 80, 110, 115, 127, 230, 240 V
Rated power (AC / DC):	AC 2.8 VA (50 Hz) /2.5 VA (60 Hz)/ DC 1.5 W	AC 1.6 VA / DC 0.9 W
Tolerance of supply voltage:	-20 / +10 %	-20 / +10 %
<b>Isolating data</b>		
Rated insulation voltage (AC):	2500 V	2500 V
<b>Dielectric strength (AC)</b>		
Coil - contact:	2500 V	2500 V
Contact - contact:	1500 V	1500 V
Isolating resistance at 500 V DC:	10 <sup>7</sup> Ω	10 <sup>7</sup> Ω
<b>Distance contact - coil</b>		
Air:	≥ 3 mm	≥ 1.6 mm
Surface:	≥ 4.2 mm	≥ 3.2 mm
<b>General information</b>		
Mechanical life:	≥ 2x10 <sup>7</sup>	1x10 <sup>7</sup>
Electrical life (AC1):	≥ 2x10 <sup>5</sup> 10 A / 250 V AC	≥ 10 <sup>5</sup> 6 A / 250 V AC
<b>Max. switching frequency</b>		
At rated load:	1200 cycles / hrs	1200 cycles / hrs
Without load:	12000 cycles / hrs	18000 cycles / hrs
Pick-up time / returning contact:	max. 12 / 10 ms	max. 10 / 8 ms
Working temperature:	-40.. +55 °C (-40 to 131 °F)	-40.. +55 °C (-40 to 131 °F)
Storage temperature:	-40 .. +85 °C (-40 to 185 °F)	-40.. +85 °C (-40 to 185 °F)
Protection:	IP40 from the front panel	IP40 from the front panel
Dimensions:	35 x 35 x 54.4 mm	27.5 x 21.2 x 35.6 mm
Weight:	83 g (2.9 oz)	35 g (1.2 oz)
Standards:	EN 60947-4-1, EN 60947-5-1	EN 61810-1, EN 60255-1-00, EN 61810-7

Coil data for 750L


Product Type	Voltage [V]	Resistance [Ω]
AC voltage		
5012	AC 12	18.5
5024	AC 24	75
5048	AC 48	305
5060	AC 60	475
5115	AC 115	1 840
5120	AC 120	1 910
5230	AC 230	7 080
5240	AC 240	7 760
DC voltage		
1012	DC 12	110
1024	DC 24	430
1048	DC 48	1 750
1060	DC 60	2 700
1110	DC 110	9 200
1120	DC 120	11 000
1220	DC 220	37 000

Coil data for 782L


Product Type	Voltage [V]	Resistance[Ω]
AC voltage		
5006	AC 6	9.8
5012	AC 12	39.5
5024	AC 24	158
5042	AC 42	470
5060	AC 60	930
5080	AC 80	1 720
5110	AC 110	3 450
5115	AC 115	3 610
5127	AC 127	4 000
5230	AC 230	16 100
5240	AC 240	16 800
DC voltage		
1005	DC 5	28
1006	DC 6	40
1012	DC 12	160
1024	DC 24	640
1060	DC 60	4 000
1080	DC 80	7 100
1125	DC 125	16 000
1220	DC 220	15 400

## Connection

### 750L



### 782L



## Socket

### ES-11 for 750 L

Max. Current: 10A  
Weight: 60 g (2.1 oz.)  
Mounting on DIN rail  
Designed for 3- relay contacts



### ES-15/4N - for 782L

Max. Current: 12A  
Weight: 59 g (2 oz.)  
Mounting on DIN rail  
Designed for 4- relay contacts



## EAN code

750L/110 V DC	8595188129992
750L/120 V AC	8595188130028
750L/12V AC	8595188130011
750L/12V DC	8595188129978
750L/230 V AC	8595188119221
750L/24V AC	8595188119207
750L/24V DC	8595188125147
750L/48V DC	8595188129985

782L/12V AC	8595188119085
782L/12V DC	8595188119030
782L/230 V AC	8595188119115
782L/24V AC	8595188119092
782L/24V DC	8595188119047
782L/6V DC	8595188129909

ES-15/4N	8595188119245
ES-11	8595188129879
ES8	8595188136167
Clip to relay 750L	8595188119283
Clip to relay 782L	8595188119276

## Accessories

### To ES-11 socket - for 750L

Clip to relay 750L: 16-1351



### To ES-15/4N socket - for 782L

Swivel label - TR1

The LED module, the protective diode and R/C member can be assigned into the slot.



R, L, LED<sup>1</sup>

MODULAR



DIM-2

Staircase switch with gradual dimming up/down, level and time of illumination, all values are adjustable.  
R = 10 - 500 VA  
L = 10 - 250 VA.



DIM-5

Control by a button/buttons (connected in parallel), short pressing ON/OFF, long pressing regulates brightness, memory storing.  
R = 10 - 500 VA  
L = 10 - 250 VA.

R, L, C, LED<sup>2</sup>



DIM-14

As DIM-5 but dims all types of loads, in-built protection against temperature and current overload, electronic fuse.  
R = 500 VA  
L = 500 VA  
C = 500 VA.

R, L, C, ESL, LED<sup>2</sup>



DIM-15

Designated for dimming of: dimmable energy saving fluorescent lamps, LED lamps.  
R,L,C, - resistive, inductive and capacitive loads.



LIC-1

Intensity controller for maintaining the constant illumination level. Dimmable energy saving fluorescent lamps, LED lamps.  
R,L,C, - resistive, inductive and capacitive loads.



LIC-2

Serves as control unit for dimmers or electronic ballasts with analog control 0-10 V / 1-10 V.

R, L, C, LED<sup>2</sup>

MODULAR



DIM-6

Power dimming to 2kW. Can be controlled by button, external potentiometer, 0-10 V (1-10 V) system iNELS.  
R = 2000 VA  
L = 2000 VA  
C = 2000 VA.



DIM6-3M-P

DIM6-3M-P is a power module expansion unit for DIM-6. It cannot be operated independently.  
R = 1000 VA  
L = 1000 VA  
C = 1000 VA.

R, L, LED<sup>1</sup>

MINI



SMR-S

As DIM-5, but for mounting under a wall-switch into an installation box KU-68 (or the similar), 3 wire connection (without neutral).  
R = 10-300 VA  
L = 10-150 VA.



SMR-U

As DIM-14, but for mounting under a wall-switch into an installation box KU-68 (or the similar).  
R = 1000 VA  
L = 1000 VA  
C = 1000 VA.

R, L, C, ESL, LED<sup>2</sup>



SMR-M






For mounting under a wall-switch into an installation box KU-68 (or similar). Dimmable energy saving fluorescent lamps, LED lamps.  
R,L,C, - resistive, inductive and capacitive loads.



Type	Design	Supply voltage	Type of dimmed load					Output			Method of phase regulation		Control principal 0-10 V / 1-10V	Designation	Catalogue page	
			R <small>resistive (el. bulbs, halogen lights)</small>	L <small>inductive (wound transformers)</small>	C <small>capacitive (electronic transformers)</small>	ESL <small>energy saving fluorescent lamps</small>	LED <sup>1,2</sup> <small>LED lamps</small>	Output unit	Rated load			ON-DIMMER				OFF-DIMMER
									R	L	C					
DIM-2	1M-DIN	AC 230 V	●	●	x	x	●	triac	10-500 VA <sup>x</sup>	10-250 VA	x	●	x	x	Stairway automaton with progressive illumination on / off, adjustable rise time, delay, deceleration, maximum brightness. Dimmer R, L, LED <sup>1</sup> .	42
DIM-5	1M-DIN	AC 230 V	●	●	x	x	●	triac	10-500 VA <sup>x</sup>	10-250 VA	x	●	x	x	Universal dimmer R, L, LED <sup>1</sup> , button control.	43
DIM-14	1M-DIN	AC 230 V	●	●	●	x	●	2x MOSFET	500 VA <sup>x</sup>	500 VA <sup>x</sup>	500 VA <sup>x</sup>	●	●	x	Universal dimmer R, C, L, LED <sup>2</sup> , button control, automatic switching of the dimming mode according to the connected load	48
DIM-15	1M-DIN	AC 230 V	●	●	●	●	●	2x MOSFET	300 VA	300 VA	300 VA	●	●	x	Universal dimmer R, C, L, ESL, LED <sup>2</sup> , button control,	46
DIM-6	6M-DIN	AC 230 V	●	●	●	x	●	4x MOSFET	2 000 VA <sup>x</sup>	2 000 VA <sup>x</sup>	2 000 VA <sup>x</sup>	●	●	●	Universal dimmer 2kW R, C, L, LED <sup>2</sup> , power expandable, pushbutton control / 0-10V / 1-10V / potentiometer / INELS bus.	44
DIM6-3M-P	3M-DIN	AC 230 V	●	●	●	x	●	2x MOSFET	1 000 VA <sup>x</sup>	1 000 VA <sup>x</sup>	1 000 VA <sup>x</sup>	●	●	x	Expansion power module 1kW to DIM-6 dimmer.	45
SMR-S	BOX	AC 230 V	●	●	x	x	●	triac	10-300 VA <sup>x</sup>	10-150 VA	x	●	x	x	Like DIM-5, but for mounting under the push-button into the installation box (e.g. KU-68).	49
SMR-U	BOX	AC 230 V	●	●	●	x	●	2x MOSFET	500 VA <sup>x</sup>	500 VA <sup>x</sup>	500 VA <sup>x</sup>	●	●	x	Like DIM-14, but for mounting under the push-button into the installation box (e.g. KU-68).	49
SMR-M	BOX	AC 230 V	●	●	●	●	●	2x MOSFET	160 VA	160 VA	160 VA	●	●	x	Like DIM-15, but for mounting under the push-button into the installation box (e.g. KU-68).	46
LIC-1	1M-DIN	AC 230 V	●	●	●	●	●	2x MOSFET	300 VA <sup>x</sup>	300 VA <sup>x</sup>	300 VA <sup>x</sup>	●	●	x	Universal dimmer R, C, L, ESL, LED <sup>2</sup> , button control, constant light level control.	50
LIC-2	1M-DIN	AC 100-250 V	x	x	x	x	x	x	x	x	x	x	x	●	Controller for dimmers or electronic ballasts with 0-10 V / 1-10V control, button control, constant light level control.	51

\* with load over 300 VA is necessary to ensure sufficient cooling

## Key to symbols

TYPE OF LOAD (symbols)	bulbs, halogen lamps	low-voltage el.bulbs 12/24V wound transformers	low-voltage el.bulbs 12/24V electronic transformers	ESL dimmable compact fluorescent lamps	Dimmable LED bulbs
	 R	 L	 C	 ESL	 LED <sup>1,2</sup>

Demonstrated symbols are informative

## Expendatory:



Dimmer with designated load:

R - resistive

L - inductive

C - capacitive

ESL - energy saving bulbs

LED<sup>1</sup> - dimmable LED bulbs, designed for dimmers with phase-controlled rising edge (triac dimmers)

LED<sup>2</sup> - dimmable LED bulbs designed for dimmers with phase or phase-to-phase phase control (dimmers with MOSFET)

IPxx protection - under normal conditions: normal conditions are understood as such conditions of operating an electrical device, installation and power supply network for which the entire device is designed, produced and installed. Upon these normal conditions of use and upon normal maintenance, all protective devices must be effective throughout the entire expected service life of the product.

Recommendation for mounting modular dimmers: leave a gap of min. 0.5 module (approx. 9 mm / 0.4") on side of the device to ensure better cooling of the device.





EAN code  
DIM-5 / 230V: 8595188115612


Technical parameters		DIM-5
Supply terminals:	A1 - A2	
Voltage range:	AC 230 V / 50 Hz	
Burden:	max. 5 VA	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Controlling		
Control terminals:	T - A1	
Control voltage:	AC 230 V	
Power control input:	max. 1.5 VA	
Impulse length:	min. 80 ms / max. unlimited	
Glow-lamps:	Yes	
Max. amount of glow lamps connected to controlling input:	230 V - max. amount 50 pcs (measured with glow lamp 0.68 mA / 230 V AC)	
Output		
Current rating:	2 A	
Resistance load:	10 - 500 VA	
Inductive load:	10 - 250 VA	
Output indication:	red LED	
Other information		
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	58 g (2 oz.)	
Standards:	EN 60669-2-1, EN 61010-1	

Recommendation for mounting: leave a gap of min. 0.5 module (approx. 9 mm / 0.4") on side of the device to ensure better cooling of the device.


- Designated for dimming el. bulbs, halogen lights and halogen lights with winding transformers and Dimmable LED<sup>1</sup>.
- Short press turns light on/off, longer press (> 0.5 s) provides dim up / dim down.
- When switched off, brightness level is stored in a memory and when ON again it restores last brightness level.
- Voltage range: AC 230 V.
- Contactless output.
- LED output indication (with any level of brightness).
- Possibility to connect control buttons in parallel.
- 1-MODULE, DIN rail mounting.
- Clamp terminals.
- Protection against over-heating inside the product - switches output off + signalizes overheating by LED flashing.

<sup>1</sup> For more information, see page 41


## Description

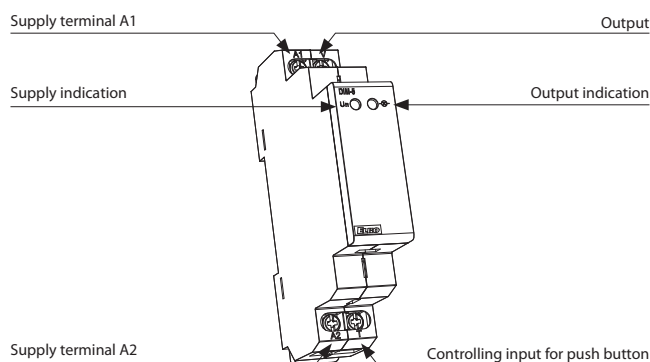


## Connection



## Function

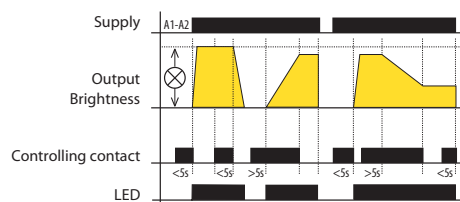

## Symbol






EAN code  
DIM-6 /230 V: 8595188136914

Technical parameters		DIM-6
Supply terminals:		L, N
Supply voltage:		AC 230 V / 50 Hz
Input:		10 VA
Tolerance of voltage range:		-15 %; +10 %
Max. output power:		max. 2 000 VA
Dissipated power:		2.5 % from load
Module extendable:		to 10 000 VA
Galvanic separation of BUS and power output:		Yes
Isul. volt. between outputs and inner circuits:		3.75 kV, SELV according to EN 60950
Control - button type		
Control voltage:		AC 12 - 240 V
Control terminals:		S - S, galvanically separated
Power of control input:		AC 0.53VA (AC 230 V), AC 0.025-0.2VA (AC 12-240 V)
Length of control impulse:		min. 25 ms / max. unlimited
Recovery time:		max. 150 ms
Connection of glow lamps:		No
Control 0(1)-10 V		
Control terminals:		0(1)-10 V, GND
Control voltage:		0-10 V or 1-10 V
Min. current of control input:		1 mA
BUS control:		
Control terminals:		BUS+, BUS-
BUS voltage:		27 V DC
Current of control input:		5 mA
Indication of data transmission:		yellow LED
Output		
Contactless:		4 x MOSFET
Current rating:		10 A
Resistive load:		2 000 VA*
Inductive load:		2 000 VA*
Capacitive load:		2 000 VA*
Indication of output state:		yellow LED, according to load type
Other information		
Operating temperature:		-20 °C to +35 °C (-4 °F to 95 °F)
Storing temperature:		-30 °C to +70 °C (-22 °F to 158 °F)
Operating position:		vertical
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel
Purpose of control device:		operative control device
Construction of control device:		individual control device
Char. of automatic operation:		1.B.E
Heat and fire resistance cat.:		FR-0
Anti-stroke category (immunity):		class 2
Rated impulse voltage:		2.5 kV
Overvoltage category:		III.
Pollution level:		2
Profile of connecting wires (mm <sup>2</sup> )		
- output part:		max.1x2.5, max. 2x1.5/ with sleeve max. 1x1.5 (AWG 12)
- control part:		max.1x2.5, max. 2x1.5/ with sleeve max. 1x2.5 (AWG 12)
Dimensions:		90 x 105 x 65 mm (3.5" x 4.1" x 2.6")
Weight:		410 g (14.5 oz.)
Standards:		EN 60669-2-1, EN 61010, EN 55014

- Designed for dimming of incandescent bulbs and halogen lights with wound or electronic transformer and Dimmable LED<sup>2</sup>.
- DIM-6 control options:
  - button (parallel button connection)
  - external potentiometer
  - analog signal 0-10 V (1-10 V)
  - iNELS BUS system.
- The DIM-6 can connect up to 8 pieces of DIM6-3M-P and control up to 10.000 VA.
- Electronic overcurrent protection, overvoltage and short-circuit protection.
- Protection against over-heating inside device - switch off output + signalize overheat by flashing red LED.
- 6-MODULE version, DIN rail mounting.
- <sup>2</sup> For more information, see page 41

### Description

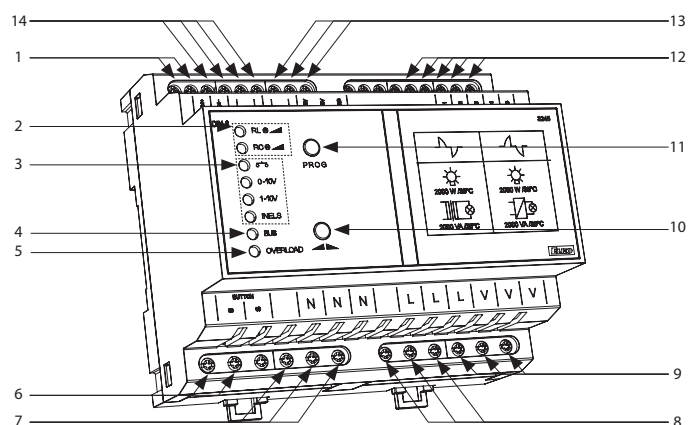


- |                                |   |   |
|--------------------------------|---|---|
| 1 Terminals for BUS connection | 6 Terminals for connecting control button | 11 Button for output control                                      |
| 2 Load type indication         | 7 Terminals of neutral wire               | 12 Terminal for additional modul conductor bar                    |
| 3 Control type indication      | 8 Terminal for phase conductor connection | 13 Terminals for control by signal 0(1)-10 V, or by potentiometer |
| 4 BUS data transfer indication | 9 Output terminals                        | 14 Terminal for regulation load of wire jumper                    |
| 5 Overload indication          | 10 Button for output control              |   |


### Types of indication LED

- RL - Yellow - indicates configuration of load RL
- RC - Yellow - indicates configuration of load RC
- Green - button control mode selected
- 0-10V - Green - 0-10 V signal control mode selected
- 1-10V - Green - 1-10 V signal control mode selected
- iNELS - Green - BUS conductor bar-iNELS control mode selected
- BUS - Yellow - indicates data transfer communication of BUS
- OVERLOAD - Red - indicates overload, flashing LED signalizes over-heating inside the device, shining LED signalizes current overload

### Symbol

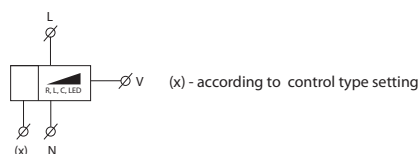

\* Warning: it is not allowed to connect inductive and capacitive loads at the same time.

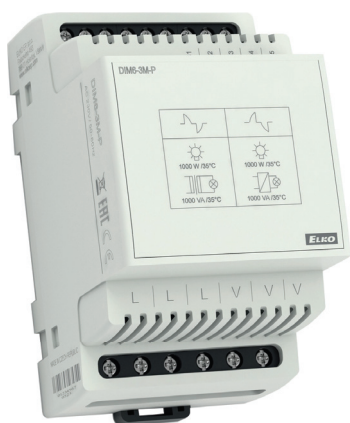


EAN code  
DIM6-3M-P: 8595188139106

Technical parameters		DIM6-3M-P
Load		max. 1 000 VA
Dissipated power:		2.5 % from load
Output		
Contactless:		2 x MOSFET
Current rating:		5 A
Resistive load:		1 000 VA*
Inductive load:		1 000 VA*
Load capacity:		1 000 VA*
Other information		
Operating temperature:		-20 °C to +35 °C (-4 °F to 95 °F)
Storing temperature:		-30 °C to +70 °C (-22 °F to 158 °F)
Operating position:		vertical
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel
Controlling device purpose:		operating control device
Controlling device construction:		additional control device
Automatic operating char.:		1.B.E
Heat and fire resistance category:		FR-0
Imunity category:		class 2
Rated impuls voltage:		2.5 kV
Overvoltage category:		III.
Pollution level:		2
Profile of connecting wires (mm <sup>2</sup> )		
- output part:		max.1x2.5, max. 2x1.5 / with sleeve max. 1x1.5 (AWG 12)
- control part:		max.1x2.5, max. 2x1.5 /with sleeve max. 1x2.5 (AWG 12)
Size:		90 x 52 x 65 mm (3.5" x 2" x 2.6")
Weight:		128 g (4.5 oz.)
Standards:		EN 60669-2-1, EN 61010, EN 55014

- Expanding power module only for use in combination with DIM-6.
- DIM6-3M-P provides power increasement (of about 1 000 VA) of load connected to DIM-6 (it means: 2 000 VA (DIM-6) + 1 000 VA (DIM6-3M-P) = 3 000 VA).
- The DIM-6 can connect up to 8 pieces of DIM6-3M-P and control up to 10.000 VA (the load must be divided into individual power blocks so that their maximum power is not exceeded).
- Attention-device has to be protected by circuit breaker accordant to the load connected to device.
- DIM-6 in installation is cooled by natural air flow. If the natural air flow access is reduced, cooling has to be provided by ventilator. Rated operating temperature is 35 °C / 95 °F.
- If there are several DIM6-3M-P connected to DIM-6, the distance between them has to be min. 2 cm / 0.8".
- Max. lenght of BUS EB is 1 m / 39.4" and the connection has to be realized by shielded cable.

## Device description

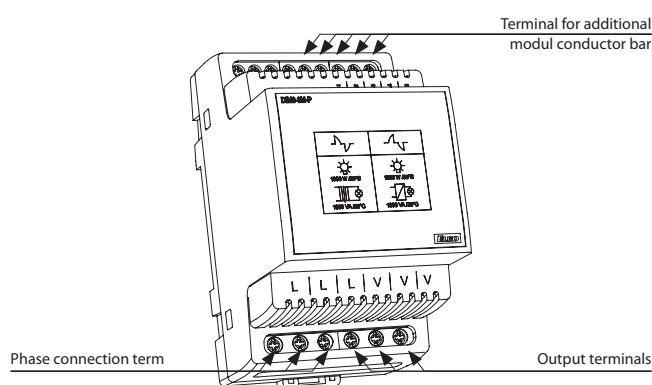


## Note

The DIM-6 dimmer (L, V) terminals and the DIM6-3M-P expansion module are three-fold for easier multi-part loads.


\* Warning: it is not allowed to connect loads of inductive and capacitive character at the same time.

## Connection

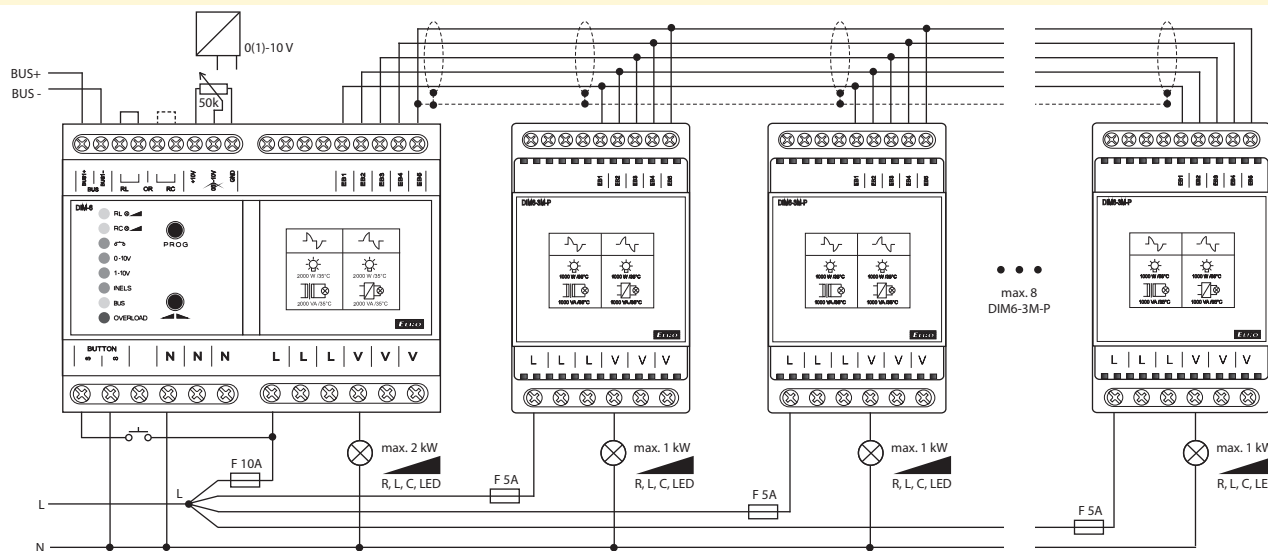

A quick fuse corresponding to the power of each module must be included in the L supply for each module.



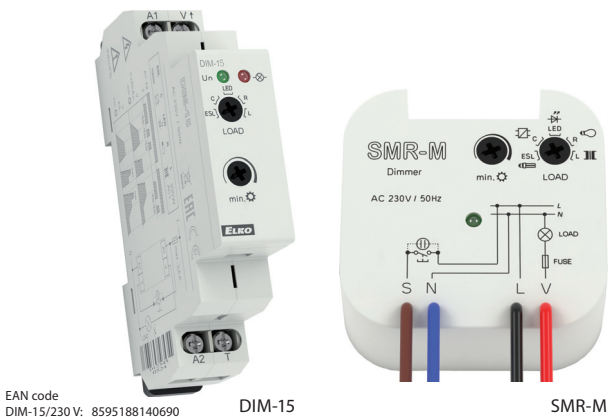

EAN code  
DIM-15/230 V: 8595188140690  
SMR-M: 8595188143776

DIM-15

SMR-M

Technical parameters	DIM-15	SMR-M
Supply terminals:	A1 - A2	x
Voltage range:	x	4-wire, with neutral
Operating range:	AC 230 V / 50 Hz	
Apparent power:	-15 %; +10 %	
Loss power:	max. 1.5VA	
Dissipated power:	max. 0.7W	
Supply indication:	green LED	
Control		
Control terminals:	A1 - T	x
Control wire:	x	L - S
Control voltage:	AC 230 V	
Control input power:	AC 0.3 - 0.6 VA	
Control impulse lenght:	min. 80 ms / max. unlimited	
Glow tubes connection:	Yes	
Max. amount of glow lamps connected to controlling input:	max. 15 pcs (measured with glow lamp 0.68 mA / 230 V AC)	max. 10 pcs (measured with glow lamp 0.68 mA / 230 V AC)
Output		
Contactless:	2 x MOSFET	
Load:	300 W (at cos φ =1)*	160 W (at cos φ =1)*
Output status indication:	red LED	x
Other information		
Operating temperature:	-20 °C to +35 °C (-4 °F to 95 °F)	
Storing temperature:	-20 °C to +60 °C (-4 °F to 140 °F)	
Operating position:	any	
Mounting:	DIN rail EN 60715	free at connecting wires
Protection degree:	IP40 from front panel / IP10 clips	IP 30 in standard conditions**
Overvoltage category:	III.	
Pollution level:	2	
Terminal wire capacity (mm²):	max. 2x2.5, max. 1x 4 with sleeve max. 1x2.5, max. 2x1.5 (AWG 12)	x
Connection wires (cross-section / lenght):	x	CY, 0.75 mm² (AWG 18) / 90 mm (3.5")
Dimensions:	90 x 17.6 x 64 mm	49 x 49 x 21 mm
Weight:	57 g	38 g
Standards:	EN 60669-2-1, EN 61010-1	

- Designed for dimming of incandescent bulbs and halogen lights with wound or electronic transformer, dimmable light bulbs and dimmable LED<sup>2</sup>.
- Enables gradual setting of luminance by push-button (non-detent) or parallel buttons.
- Returns to last state upon re-energization.
- Type of light source is set by switch-over on the front panel of device.
- Min. luminance, set by potentiometer on the front panel, eliminates flashing of light sources.

DIM-15

- Output status is indicated by red LED:
  - shines when output is active.
  - flashes while heating overload, at the same time output is disconnected.
- 1-MODULE version, DIN rail mounting, saddle terminals.


SMR-M

- Button-controlled dimmer intended to be installed in an installation box into the existing electrical wiring.
- Protection against excessive temperature inside the device - switches off the output.


<sup>2</sup> For more information, see page 41

Connection

DIM-15

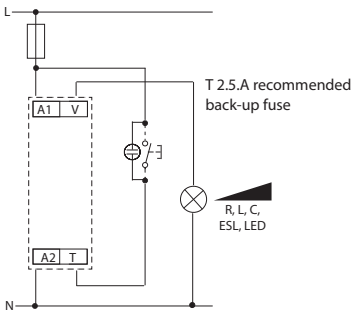


SMR-M




Symbol

DIM-15 (SMR-M)



Light source type setting





\* Due to a large number of light source types, the maximum load depends on the internal construction of dimmable light sources and their power factor  $\cos \varphi$ . The power factor of dimmable LEDs and ESL bulbs ranges from  $\cos \varphi = 0.95$  to 0.4. An approximate value of maximum load may be obtained by multiplying the load capacity of the dimmer by the power factor of the connected light source.


\*\* For more information see page 41.

Warning: it is not allowed to connect inductive and capacitive loads at the same time.

## Device description

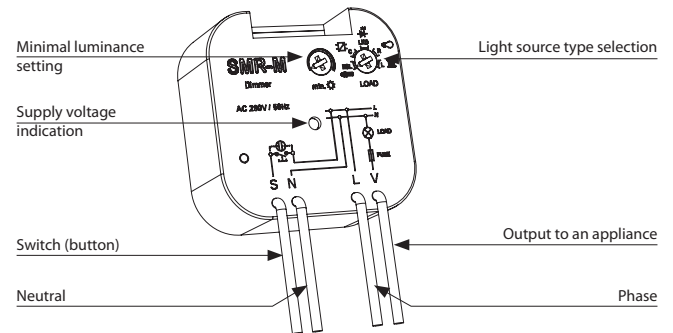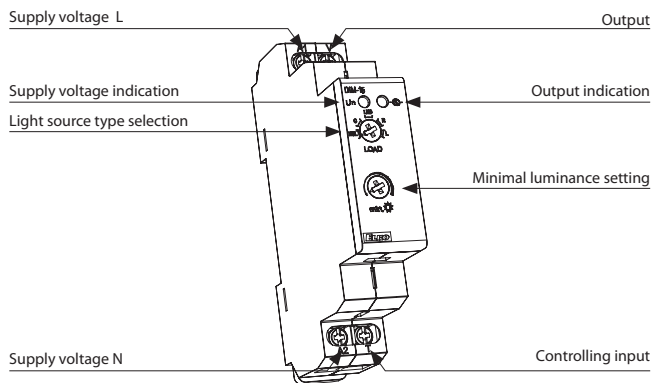

## Functions and controlling

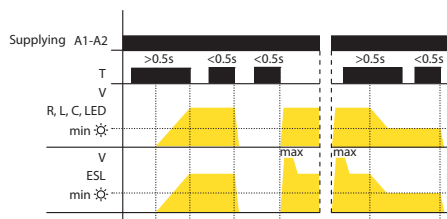

- short button press (<0.5s) turns the light off or on
- long press (>0.5s) enables slight regulation of light intensity
- setting of minimal luminance is possible only during decreasing of luminance by long button press
- setting of minimal luminance by saving fluorescent lamps serves for harmonizing of lowest light intensity prior its unprompted switching off

Luminance setting:


LED, R, L, C:

- if the light is turned off, short press (<0.5s) switches the light onto last set luminance level

ESL:

- when light is off, short impulse turns lamp on and then luminance is decreased to set level

## Connection example

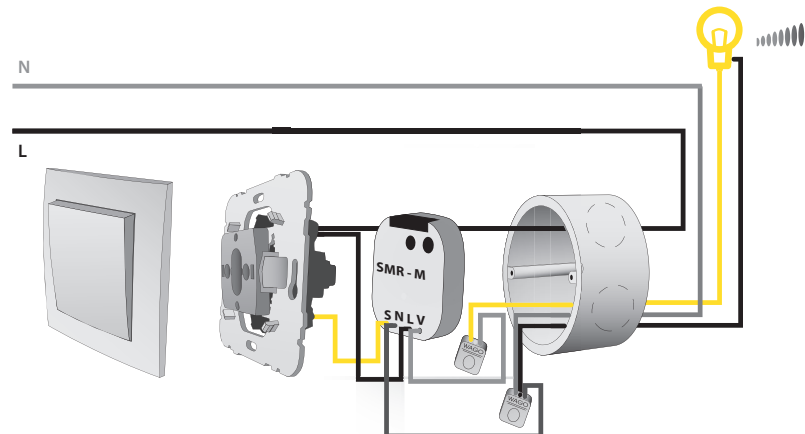

## Additional information

- it is not possible to dim energy-saving lamps without marking: dimmable
- an incorrect setting of light source has effect only on dimming range, it means neither dimmer or load get damaged
- max. number of dimmable light sources depends on their internal structure
- it is not recommended to connect light sources with different types and brands, to one dimmer
- list of dimmable sources on page 157



EAN code  
DIM-14 / 230 V: 8595188135955





Technical parameters		DIM-14	
Supply terminals:	A1 - A2		
Voltage range:	AC 230 V / 50 Hz		
Burden:	1.3 W		
Supply voltage tolerance:	-15 %; +10 %		
Dissipated power:	6 VA		
Indication output:	green LED		
Controlling			
Control terminals:	A1 - T		
Control voltage:	AC 230 V		
Power control input:	AC 0.3-0.6 VA		
Impulse length:	min. 80 ms / max. unlimited		
Glow-lamps:	Yes		
Max. amount of glow lamps connected to controlling input:	230 V - max. amount 20 pcs (measured with glow lamp 0.68 mA / 230 V AC)		
Output			
Contactless:	2 x MOSFET		
Current rating:	2 A		
Resistance load:	500 VA*		
Inductive load:	500 VA*		
Capacitive load:	500 VA*		
Output state indication:	red LED		
Other information			
Operating temperature:	-20 °C to +35 °C (-4 °F to 95 °F)		
Storage temperature:	-20 °C to +60 °C (-4 °F to 140 °F)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel / IP10 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)		
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		
Weight:	58 g (2 oz.)		
Standards:	EN 60669-2-1, EN 61010-1		


\* When load is above 300 VA it is necessary to ensure sufficient cooling.

Recommendation for mounting: leave a gap of min. 0.5 module (approx. 9 mm / 0.4") on side of the device to ensure better cooling of the device.

Warning for DIM-14: it is not allowed to connect together loads of inductive and capacitive type in the same time.

- designated for dimming of el. bulbs and halogen lights with wound or electronic transformer and Dimmable LED<sup>2</sup>.
  - for switching and dimming of lights, control inputs for a button
  - short pressing switches ON/OFF, longer pressing (> 0.5 s) enables gradual light intensity setting
  - when switched off , brightness level is stored in a memory and when switched on again this last brightness level is restored
  - supply voltage: AC 230 V
  - output without contacts: 2x MOSFET
  - LED output indication (with any level of brightness) possibility of parallel connection of control buttons
  - Electronic overvoltage protection.
  - Protection against over-heating inside the device - output off.
  - Resistive, inductive or capacitive load, up to 500 W.
  - 1-MODULE, DIN rail mounting.
- <sup>2</sup> For more information, see page 41

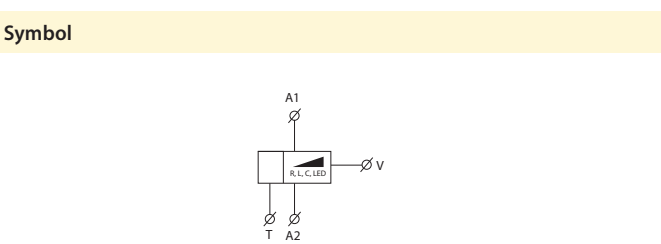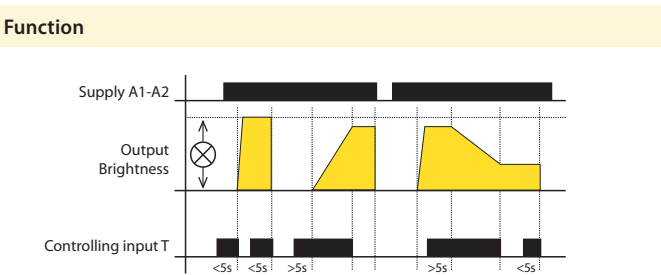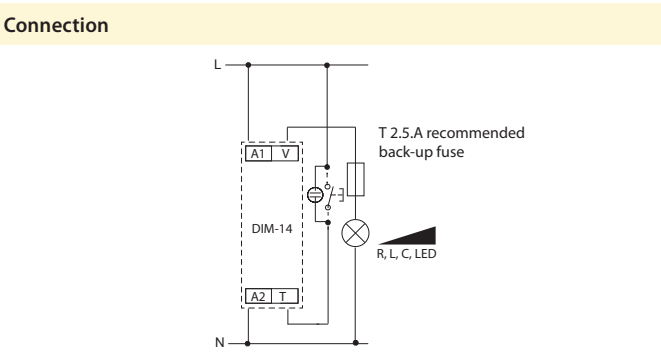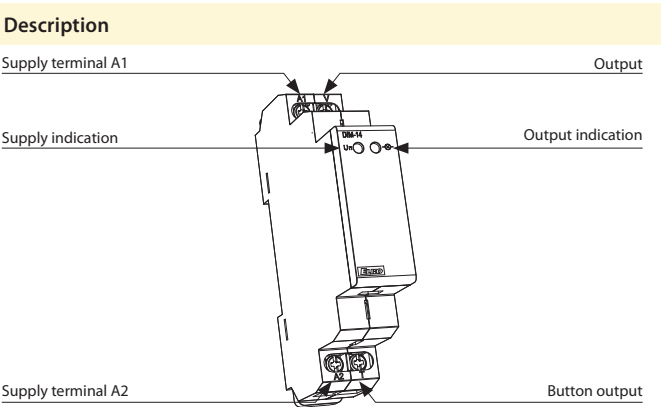



EAN code  
SMR-S / 230 V: 8595188123518  
SMR-U / 230 V: 8595188130738

Technical parameters		SMR-S	SMR-U
Connection:	3-wire con., without neutral		4-wire con., with neutral
Voltage range:	230 V AC / 50 Hz		
Power input (no operation / make):	max. 3 VA		
Supply voltage tolerance:	-15 %; +10 %		
Output			
Resistive load:	10 - 300 VA	500 VA*	
Inductive load:	10 - 150 VA	500 VA*	
Capacitive load:	x	500 VA*	
Control			
Control voltage:	AC 230 V		
Current:	max. 3 mA		
Impulse lenght:	min. 50 ms / max. unlimited		
Glow tubes connection:	Yes		
Max. amount of glow lamps connected to controlling input:	230 V - max. amount 10 pcs (measured with glow lamp 0.68 mA / 230 V AC)		
Other information			
Operating temperature:	0 °C to +50 °C (32 °F to 122 °F)		
Operating position:	any		
Mounting:	free at connecting wires		
Protection degree:	IP30 in standard conditions**		
Overvoltage category:	III.		
Pollution degree:	2		
Fuse:	F 1.6 A / 250 V	x	
Connection wires:	solid wires 0.75 mm <sup>2</sup> (AWG 18) / 90 mm (3.5")		
Glow lamps in a button:	max. number 10		
Dimensions:	49 x 49 x 13 mm (1.9" x 1.9" x 0.5")		
Weight:	32 g (1.1 oz.)	32 g (1.1 oz.)	
Standards:	EN 61010-1, EN 60669-2-1		

\* with load over 300 VA is necessary to ensure sufficient cooling.

\*\* for more information see page 41

- Button-controlled dimmers designated for flush mounting into a wiring box.
- Possible to control from more places (parallel connections).
- Protection against temperature overrun inside the device.

#### SMR-S:


- Designated for dimming el. bulbs, halogen lights and halogen lights with winding transformers and Dimmable LED<sup>1</sup>.
- 3-wire connection, functional without neutral
- max. load: 300 VA (el. bulbs or halogen lights with wound transformer)
- contactless output -1x triac
- with exchangeable fuse.

#### SMR-U:


- Designed for dimming of incandescent bulbs and halogen lights with wound or electronic transformer and Dimmable LED<sup>2</sup>.
- 4-wire connection
- max. load: 500 VA (el. bulbs or halogen lights with electronic or wound transformer)
- contactless output - 2x MOSFET
- electronic over-heating protection - output off in case of short-circuit or overload.

<sup>1,2</sup> For more information, see page 41

### Description of SMR-S

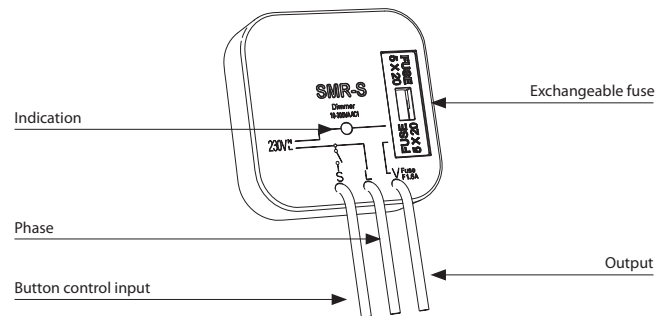


### Connection

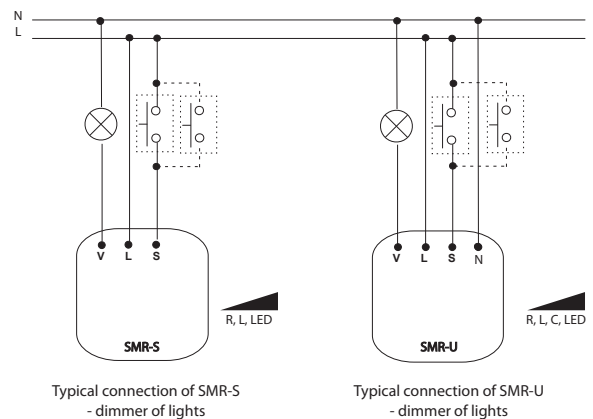

Warning: it cannot be used for fluorescent lights and energy saving lights!

SMR-U: It is not allowed to connect together loads of inductive and capacitive type in the same time.

### Function

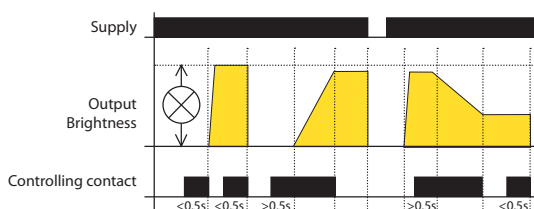

Short press (<0.5s) turns a light on, another short press turns it off. A longer press (>0.5s) causes a gradual regulation of light intensity min-max-min round until the button is released. After releasing a set intensity is kept in memory, further short presses turn the light on/off keeping the set intensity. The intensity can be changed by further long press. After de-energising the relay remembers the set value.



EAN code  
LIC-1 + SKS: 8595188144933  
SKS photosensor: 8594030337288

Technical parameters		LIC-1
Supply terminals:	A1 - A2	
Supply voltage:	AC 230 V / 50 - 60 Hz	
Supply voltage tolerance:	±15 %	
Apparent/loss power input:	max. 1.6 VA / 0.8 W	
Power supply indication:	green LED	
Control		
Button - control. terminals:	A1 - T	
Control voltage:	AC 230 V	
Control input power:	max. 0.6 VA	
Control impulse lenght:	min. 80 ms / max. unlimited	
Glow tubes connection (terminals: A1- T):	Yes	
Maximum number of connected glow lamps the control input:	230 V - max. amount 50 pcs (measured with glow lamp 0.68 mA / 230 V AC)	
Blocking input - terminals:	A1 - B	
Control. voltage:	AC 230 V	
Suplly:	max. 0.1 VA	
Connect glow-lamps (terminals A1 - B):	No	
Impulse length:	min. 80 ms / max. unlimited	
Output		2x MOSFET
Output status indication:	red LED	
Load capacity:*	300 W (at cos φ =1)	
Other information		
Operating temperature:	-20 °C to +35 °C (-4 °F to 95 °F)	
Storage temperature:	-20 °C to +60 °C (-4 °F to 140 °F)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Ingress protection:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Contamination degree:	2	
Connecting conductor cross-section (mm²):	solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	66 g (2.33 oz.)	


\* Due to a large number of light source types, the maximum load depends on the internal construction of dimmable LEDs and ESL bulbs and their power factor cos φ. The power factor of dimmable LEDs and ESL bulbs ranges from cos φ = 0.95 to 0.4. An approximate value of maximum load may be obtained by multiplying the load capacity of the dimmer by the power factor of the connected light source.

- Overview of dimmable light sources on page 157


Warning: it is not allowed to connect inductive and capacitive loads at the same time.

- Designed for dimming of incandescent bulbs and halogen lights with wound or electronic transformer, dimmable light bulbs and dimmable LED².
  - Automatically regulates the intensity of light in a room.
  - External sensor scans the intensity and based on the preset value it decreases or increases the brightness of light.
  - Operating status:
    - 1 - Off.
    - 2 - Automatic regulation.
    - 3 - Cleaning (maximum level of illumination).
    - 4 - Setting the minimum lighting brightness.
    - 5 - Setting the desired level of illumination.
  - Optional connection of buttons with 50 neon lamps.
  - Blocking the automatic control via external signal.
  - Power supply 230 V AC.
  - 1-MODULE, DIN rail mounting, clamping terminals.
- ² For more information, see page 41

Description

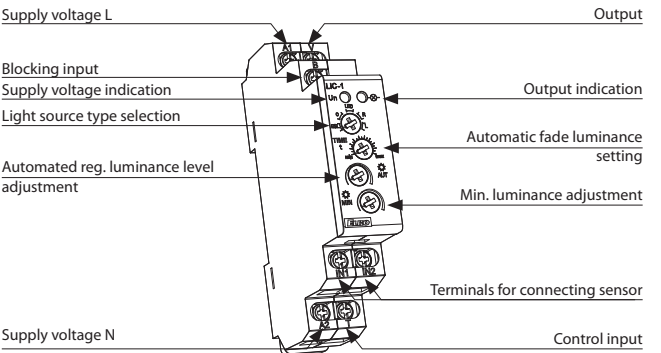

Connection

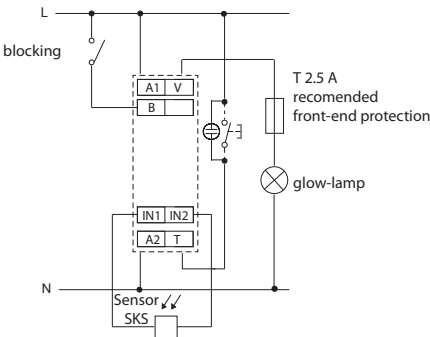

Function

**T-button control:**

- pressing button shortly (< 0.5s) always turns of lamp
- pressing button longer (0.5... 3s) turns on lamp in automatic regulation mode
- pressing button long (> 3s) turns on lamp to full illumination - „cleaner“ mode
- after turning on the power supply, the dimmer is always turned off


**Thyristor B:**

serves to block automatic regulation (lamp turns off).

**WARNING!** The lamp may be turned on in “cleaner” mode even while blocked.

After ending block mode, the lamp remains off.

Symbol







EAN code  
LIC-2 + SKS: 8595188145312  
SKS photosensor: 859403037288

### Technical parameters

### LIC-2

Supply terminals:	L - N
Supply voltage:	AC 100 - 250 V / 50 - 60 Hz
Consumption apparent / loss:	max. 2.7 VA / 1.4 W
Power supply indication:	green LED

### Control

Button - control terminals:	L - T
Control voltage:	AC 100 - 250 V
Impulse length:	min. 80 ms / max. unlimited
Glow tubes connection:	No
Button - control terminals:	L - B
Glow tubes connection:	No
Duration of control pulse:	min. 80 ms / max. unlimited

### Output 1

Analog:	0 - 10 V / 10 mA max. or 1 - 10 V / 10 mA max.
Terminals:	OUT+, OUT-
Galvanically separated:	Yes


### Output 2

Number of contacts:	1x switching (AgSnO <sub>2</sub> )
Current rating:	16 A / AC1
Switching capacity:	4000 VA / AC1, 384 W / DC
Peak current:	30 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC
Output indication:	red LED
Mechanical life:	3x10 <sup>7</sup>
Electrical life (AC1):	0.7x10 <sup>5</sup>

### Other information


Operating temperature:	-20.. +55 °C (-4 to 131 °F)
Storage temperature:	-20.. +60 °C (-4 to 140 °F)
Operating position:	any
Mounting:	DIN rail EN 60715
Ingress protection:	IP40 from front panel / IP20 terminals
Overvoltage category:	III.
Contamination degree:	2
Connecting cond. cross-section (mm <sup>2</sup> ):	max. 1x 2.5, max. 2x 1.5, with sleeve max. 1x 2.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	78 g (2.8 oz.)
Standards:	EN 60669-2-1, EN 61010-1, EN 60929

### Symbol




- Serves as control unit for dimmers or electronic ballasts with analog control 0-10 V / 1-10 V.
- Keeps a preset lighting intensity (automatic regulation).
- Control operating modes using existing button:
  - switch OFF
  - automatic regulation
  - cleaning (maximum illumination level)
- Setting the basic parameters of lighting is performed by potentiometers:
  - min. brightness of illumination
  - maximum illumination level
  - speed of dimming / illumination
- Blocking the automatic control using external signal.
- Power supply AC 100 - 250 V.
- 1-MODULE, DIN rail mounting.

### Device description

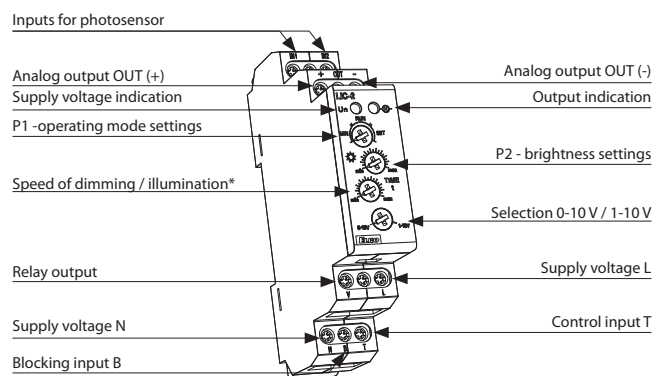

\* If the level of brightness on P2 is set on maximum the range is 24...120s

### Connection

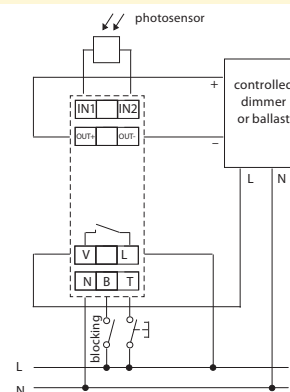

### Functions

#### Control button functions

- short press (< 0.5s) - always switches off output (relay and output voltage)
- longer press (0.5...3s) - runs automatic regulation of brightness level (according to sensor)
- long press (> 3s) - sets the max. brightness level (CLEANING mode).

#### Blocking input function

- switches off lighting - only in automatic regulation mode (has no influence in CLEANING mode), e.g. for central switching off of lighting.

#### Output relay

- switches on always upon switching on the lighting using the button if the DC output voltage is greater than 0.1V (for the mode 0-10 V) or 1V (for the mode 1-10 V)
- upon switching off the light, the relay opens if the output voltage drops below the stated limits

#### Red LED

- illuminates upon active output (at any brightness level)
- flashes upon activation of blocking

Stabilized DC  
- switching

Voltage 12 V



**PSB-10-12**  
IN: AC 110-250 V  
OUT: DC 12 V stabil  
LOAD: 0.84 A / 10 W  
- galvanically separated  
- electronic fuse  
- thermo protection  
- MINI, into an installation  
box (such as KU-68).



**PS-10-12**  
IN: AC 184-250 V  
OUT: DC 12 V stabil  
LOAD: 0.84 A / 10 W  
- galvanically separated  
- fusion safety  
- electronic fuse  
- thermo protection  
1 MODULE.



**PS-30-12**  
IN: AC 100-250 V  
OUT: DC 12 V stabil  
LOAD: 2.5 A / 30 W  
- galvanically separated  
- electronic fuse  
- thermo protection  
3 MODULE.



**DR-60-12**  
IN: AC 100-240 V  
OUT: DC 12 V stabil  
LOAD: 4.5 A / 54 W  
- galvanically separated  
- electronic fuse  
- range of incoming  
voltage  
4.5 MODULE.



**PS-100-12**  
IN: AC 100-250 V  
OUT: DC 12 V stabil  
LOAD: 8.4 A / 100 W  
- galvanically separated  
- fusion safety  
- electronic fuse  
- thermo protection  
6 MODULE.

Stabilized DC  
- linear

Nonstabilized  
AC+DC

Voltage 24 V



**PSB-10-24**  
IN: AC 110-250 V  
OUT: DC 24 V stabil  
LOAD: 0.42 A / 10 W  
- galvanically separated  
- electronic fuse  
- thermo protection  
MINI, into an installation  
box (such as KU-68).



**PS-10-24**  
IN: AC 184-250 V  
OUT: DC 24 V stabil  
LOAD: 0.42 A / 10 W  
- electronic fuse  
- thermo protection  
1 MODULE.



**PS-30-24**  
IN: AC 100-250 V  
OUT: DC 24 V stabil  
LOAD: 1.25 A / 30 W  
- galvanically separated  
- electronic fuse  
- thermo protection  
3 MODULE.



**DR-60-24**  
IN: AC 100-240 V  
OUT: DC 24 V stabil  
LOAD: 2.5 A / 60 W  
- galvanically separated  
- electronic fuse  
4.5 MODULE.



**PS-100-24**  
IN: AC 100-250 V  
OUT: DC 12 V stabil  
LOAD: 4.2 A / 100 W  
- fusion safety  
- electronic fuse  
- thermo protection  
6 MODULE.



**ZNP-10-24**  
IN: AC 230 V  
OUT: AC/DC 24V nonstabil  
LOAD: 0.4 A / 10 VA  
- galvanically separated  
- fuse  
3 MODULE.

Regulated



**PS-30-R**  
IN: AC 100-250 V  
OUT: DC 12-24 V  
regul., stab.  
LOAD: 2.5-1.25 A / 30 W  
- galvanically separated  
- electronic fuse  
- thermo protection  
3 MODULE.



**ZSR-30**  
IN: AC 230 V  
OUT: DC 5-24 V reg., stab.  
OUT: AC 24V, DC24V  
LOAD: 1.6-0.3A/10 VA  
- range of incoming  
voltage  
- current restrictor  
- electronic fuse  
3 MODULE.

Nonstabilized AC

Bell transformer



**ZTR-8-8**  
Output voltage 8 V.  
Power: 8W.




**ZTR-8-12**  
Output voltage  
12 V.  
Power: 8W.



**ZTR-15-12**  
Output voltage 4-8-12 V.  
Power: 4V 5VA;  
8V 10 VA; 12V 15VA.

Type	Design	Input voltage	Output					Protection against overload				Designation	Page in catalogue
			AC	DC	Stabilized	Output voltage	Output current	Switching (S) / Linear (L)	Safety fuse	Electronic fuse	Short-circuit-proof		
ZNP-10-24	3M-DIN	AC 230 V, -15/+10%	●	●	x	AC 24V DC 24V	0.4 A	x	●	x	x	DC and AC nonstabilized output voltage 24 V – where it is not required or is stabilized later	57
ZSR-30	3M-DIN	AC 230 V, -15/+10%	●	●	●	DC 5-24V AC 24 V	1.6 A- 0.3 A	S	●	●	x	regulated output voltage in a wide range DC 5-24 V; possibility to adjust output voltage with load according to request...	57
PSB-10-12	MINI-BOX	AC 110-250 V	x	●	●	DC 12 V	0.84 A	S	x	●	●	stabilized switching power supply with fixed output voltage 12 V / 10 W, box	54
PSB-10-24	MINI-BOX	AC 110-250 V	x	●	●	DC 24V	0.42 A	S	x	●	●	stabilized switching power supply with fixed output voltage 24 V / 10 W, box	54
PS-10-12	1M-DIN	AC 184-250V, -20/+10%	x	●	●	DC 12 V	0.84 A	S	●	●	●	stabilized switching power supply with fixed output voltage 12 V / 10 W, 1 module	54
PS-10-24	1M-DIN	AC 184-250V, -20/+10%	x	●	●	DC 24V	0.42 A	S	●	●	●	stabilized switching power supply with fixed output voltage 24 V / 10 W, 1 module	54
PS-30-12	3M-DIN	AC 100-250V, -20/+10%	x	●	●	DC 12 V	2.5 A	S	●	●	●	stabilized switching power supply with fixed output voltage 12 V / 30 W, 3 module	54
PS-30-24	3M-DIN	AC 100-250V, -20/+10%	x	●	●	DC 24V	1.25 A	S	●	●	●	stabilized switching power supply with fixed output voltage 24 V / 30 W, 3 module	54
PS-30-R	3M-DIN	AC 100-250V, -15/+10%	x	●	●	DC 12- 24V	2.5 A- 1.25A	S	●	●	●	stabilized switching power supply with fixed output voltage 12-24 V / 30 W, 3 module	54
PS-100-12	6M-DIN	AC 100-250V, -20/+10%	x	●	●	DC 12 V	8.4A	S	●	●	●	stabilized switching power supply with fixed output voltage 12 V / 100 W, 6 module	54
PS-100-24	6M-DIN	AC 100-250V, -20/+10%	x	●	●	DC 24V	4.2 A	S	●	●	●	stabilized switching power supply with fixed output voltage 24V / 100W, 6 module	54
DR-60-12	4.5M-DIN	AC 100-240 V DC 124-370V	x	●	x	DC 12 V	4.5 A	S	x	x	x	efficient switching power supply of DC voltage 12V / 54 W, wide range of input voltage (AC 100-240 and DC 124-370 V)	56
DR-60-24	4.5M-DIN	AC 100-240 V DC 124-370V	x	●	x	DC 24V	2.5 A	S	x	x	x	efficient switching power supply of DC voltage 24V / 60 W, wide range of input voltage (AC 100-240 and DC 124-370 V)	56
ZTR-8-8	2M-DIN	AC 230 V, -15/+10%	●	x	x	8V	1A	x	x	x	●	bell transformer (short-circuit-proof) for supplying of bells, door openers, home call-boxes	58
ZTR-8-12	2M-DIN	AC 230 V, -15/+10%	●	x	x	12V	0.66A	x	x	x	●		58
ZTR-15-12	3M-DIN	AC 230 V, +/- 10%	●	x	x	4-8-12V	2-1.5-1A	x	x	x	●		58




- **PSB-10:** switching stabilized power supplies with fixed output voltage, for mounting into an installation box.
  - PSB-10-12 - stabilized power supply 12V/10W.
  - PSB-10-24 - stabilized power supply 24V/10W.
- **PS-10:** switching stabilized power supplies with fixed output voltage, version 1-module.
  - PS-10-12 - stabilized power supply 12 V/10 W.
  - PS-10-24 - stabilized power supply 24 V/10 W.
- **PS-30:** switching stabilized power supplies, version 3-module.
  - PS-30-12 - stabilized power supply with fixed output voltage 12V/30 W.
  - PS-30-24 - stabilized power supply with fixed output voltage 24 V/30 W.
  - PS-30-R - stabilized regulated power supply 12-24 V/30 W.
- **PS-100:** stabilized power supply with fixed output voltage, version 6-module.
  - PS-100-12 - stabilized power supply 12 V/100 W.
  - PS-100-24 - stabilized power supply 24 V/100 W.
- Output current is limited by electronic fuse, in case maximal current is exceeded, the device switches off and after a short time interval it again switches on.
- Indication of output voltage by green LED on front panel (except PSB-10).
- Temperature protection - if temperature is exceeded, the device switches off and after cooled down, it switches on again.

Technical parameters	PSB-10-12	PSB-10-24	PS-10-12	PS-10-24	PS-30-12	PS-30-24	PS-30-R	PS-100-12	PS-100-24
Input									
Voltage range:	AC 110 - 250 V / 50 - 60 Hz		AC 184 - 250 V / 50 - 60 Hz		AC 100 - 250 V / 50 - 60 Hz			AC 100 - 250 V / 50 - 60 Hz	
Burden without load (max.):	3 VA / 0.5 W		5 VA / 2 W		9 VA / 1 W	10 VA / 1.5 W	10 VA / 1.7 W	12 VA / 2 W	
Burden with full load (max.):	26 VA / 13 W		25 VA / 13 W		70 VA / 37 W			195 VA / 121 W	
Protection:	x		fuse T1A		fuse T2A			fuse T 3.15A	
Output									
Output voltage DC / max. current:	12 V / 0.84 A	24 V / 0.42 A	12.2 V / 0.84 A	24.2 V / 0.42 A	12.2 V / 2.5 A	24.2 V / 1.25 A	12.2 V / 2.5 A 24.2 V / 1.25 A	12.2 V / 8.4 A	24.2 V / 4.2 A
Tolerance of output voltage:	± 2 %		± 2 %		± 2 %		± 3 %	± 2 %	
Output indication:	x		green LED						
Wave of off-load output voltage:	40 mV		80 mV		30 mV		40 mV	1 V	
Wave of output voltage with max load:	380 mV		20 mV		80 mV		500 mV	40 mV	
Time delay after connection:	max. 1s		max. 1s		max. 5s		max. 1s	max. 3s	
Time delay after over-load:	max. 1s		max. 1s		max. 1s			max. 0.5s	
Efficiency:	> 75 %		> 75 %		> 82 %		> 81 %	>82 %	
Electronic fuse:	electronic protections short-circuit, over load, over voltage (from 120% of rated output)								
Other information									
Working humidity:	20 .. 90% RH								
Operating temperature:	-20 °C to +40 °C (-4 °F to 104°F)								
Storage temperature:	-40 °C to +85 °C (-40 °F to 185 °F)		-40 °C to +85 °C (-40 °F to 185 °F)		-25 °C to +70 °C (-13 °F to 158 °F)			-40 °C to +85 °C (-40 °F to 185 °F)	
Electrical strength input- output:	4kV								
Protection degree:	IP 30		IP40 device/ IP20 in-built in distribution board						
Overvoltage category:	II.								
Polution degree:	2								
Max. cable size (mm²):	x		solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)						
Connection wires:	solid wire CY, 4x 0.75mm² (AWG 18), 90 mm (3.5")		x						
Dimensions:	48 x 48 x 21 mm (1.9 x 1.9 x 0.8")		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		90 x 52 x 65 mm (3.5" x 2.1" x 2.6")			90 x 105 x 65 mm (3.5" x 4.1" x 2.6")	
Weight:	70 g (2.5 oz)	70 g (2.5 oz)	62 g (2.1 oz.)	62 g (2.1 oz.)	155 g (5.5 oz.)	157 g (5.5 oz.)	157 g (5.5 oz.)	367 g (12.9 oz.)	367 g (12.9 oz.)
Standards:	EN 61204-1, EN 61204-3, EN 61204-7								

## Device description

PSB-10-12

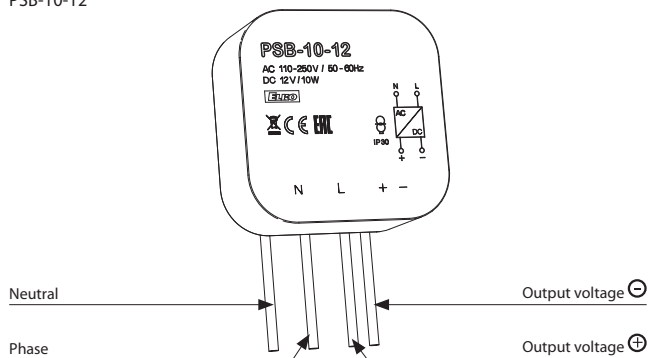


PSB-10-12 / PSB-10-24

designed for installation into an installation box. Suitable for controlling of lighting sources, thermo valves, shutter engines, etc.


PS-10-12

Supply terminals

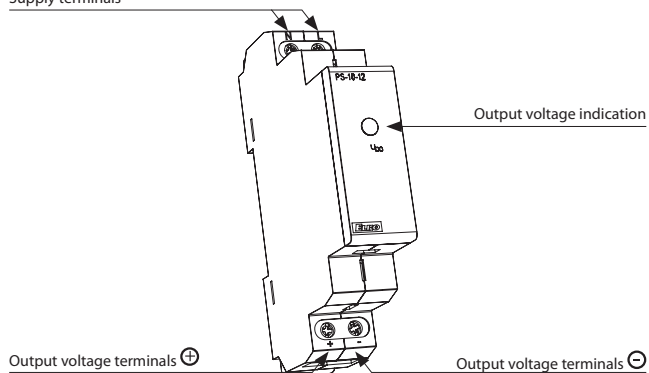


PS-30-12

Supply terminals

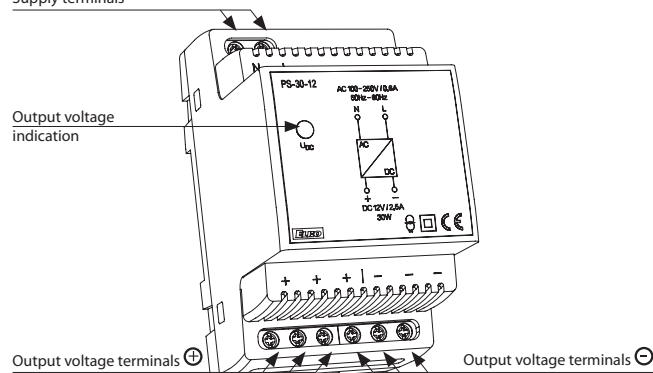


PS-100-12

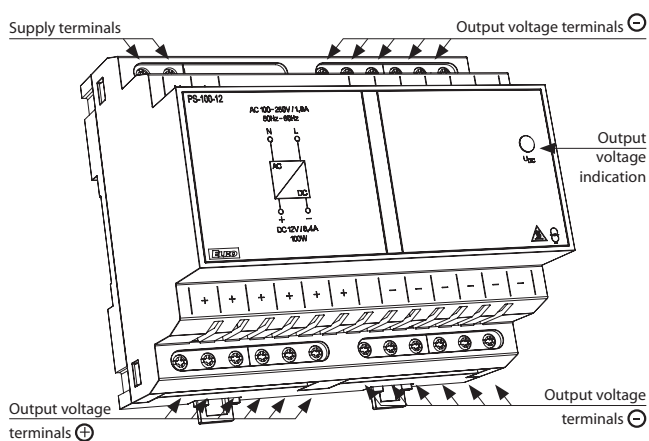


PS-30-R

Supply terminals

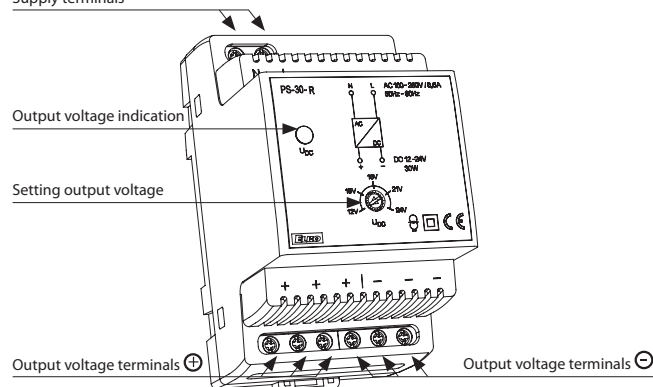


## Connection


PSB-10-12 (PSB-10-24)




PS-10-12 (PS-10-24)




PS-30-12 (PS-30-24)



PS-30-R



PS-100-12 (PS-100-24)






EAN code  
DR-60-12V: 8595188125048  
DR-60-24V: 8595188125055


Technical parameters	DR-60-12	DR-60-24
Input (U prim)		
Voltage range:	100 - 240 V AC	
Consumption without load (max):	3 VA	
Consumption with full load (max):	AC 65 VA	AC 70 VA
Output (Usec)		
Output voltage:	12 V ±10 %	24 V ±10 %
Max. load:	4.5 A / 54 W	2.5 A / 60 W
Output voltage-no load DC:	12 V ±10 %	24 V ±10 %
Wave of output voltage:	0.12 V	0.15 V
Efficiency:	83.5 %	86 %
Tolerance of output voltage:	±1 %	
Electronic fuse:	electronic protections short-circuit, over load, over voltage	
Fine adjustment of output voltage:	±10 % - rotary potentiometer	
Overload protection:	to 105 - 160 % of rated output	
Time delay after connection:	100 ms for 100 % loading and AC 230 V	
Other information		
Working humidity:	20 - 90 % RH	
Thermal coeficient:	0.03 % / °C (0 to 50 °C) (0.03 % / °F (32 °F to 122 °F))	
Operating temperature:	-20 °C to +60 °C (-4 °F to 140 °F)	
Storage temperature:	-40 °C to +85 °C (-40 °F to 185 °F) / (10 - 95 % RH)	
Electrical strength (prim/sec):	3 kV	
Protection degree:	IP20 device / IP40 in-built in distribution board	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 10)	
Dimensions:	78 x 93 x 56 mm (3.1" x 3.7" x 2.2")	
Weight:	300 g (10.6 oz.)	
Standards:	EN 61010-1, EN 61558-1, EN 61558-2-17	

- Stabilized switching power supply.
- Input voltage (Uprim) in a wide range 100 - 240 V AC.
- **DR-60-12:** power supply with fixed output voltage DC 12 V, stabilized 54 W.
- **DR-60-24:** power supply with fixed output voltage DC 24 V, stabilized 60 W.
- Max. load 12 V-4.5 A, 24 V-2.5 A.
- Electronic protection of short-circuit, over-loading, over-voltage, fine setting of output voltage by trimmer in a range ±10%.
- LED power indicator light, viewable from the front panel.
- Ambient air cooled through the perforated housing.
- 4.5-MODULE, DIN rail mounting, isolation class II.


Description

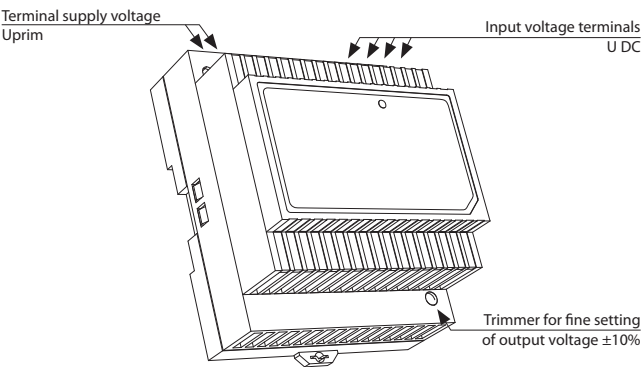

Connection

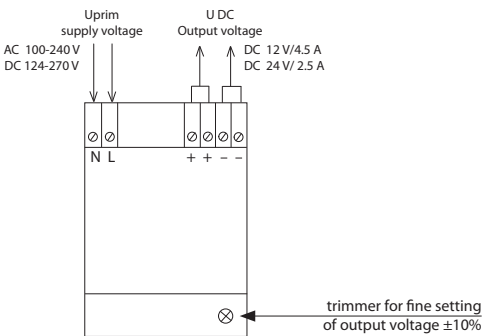

Symbol







EAN code  
ZNP-10-12V: 8594030332733  
ZNP-10-24V: 8594030334089  
ZSR-30: 8594030331750

Technical parameters	ZSR-30	ZNP-10-24V
<b>Entry (U prim)</b>		
Voltage range:	AC 230 V / 50-60 Hz	
Supply voltage tolerance:	-15 %; +10 %	
Consumption without load (max):	6 VA	6.5 VA
Consumption with load (max):	10 VA	11 VA
<b>Output (Usec)</b>		
Output voltage:	DC 5-24 V stab. DC 24 V nonstab. AC 24 V	DC 12 V nonstab. AC 24 V
Output voltage-no load AC:	32 V	
Output voltage-no load DC:	44 V	
Fuse:	primary wind T100 mA	
Wave of output voltage:	300 mV	max. 3 V
Efficiency:	75 %	x
Tolerance of output voltage:	±5 %	x
Electronic fuse:	Towards black-out and and current overloading	x
<b>Other information</b>		
Operating temperature:	-20.. +40 °C	
Storing temperature:	-20.. +60 °C	
Electrical strenght (prim/sec):	4 kV	
Protection degree:	IP40 from front panel / IP20 terminals	
Max. cable size (mm <sup>2</sup> ):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")	
Weight:	390 g (13.8 oz.)	360 g (12.7 oz.)
Standards:	EN 61010-1, EN 61558-2-1, EN 61558-1	

#### WARNING!

Values of max. load are valid for (operational) temperature.

Total loads on all output terminals may not exceed this values:

- by supplying 230 V-253 V - 8W

- from 230 V...207 V output power is proportionately decreasing onto 5 W

#### Regulated stabilized power supply ZSR-30


- Supply of various devices and appliances by safe voltage with fully galvanic separation from the main.
- Input voltage: AC 230 V.
- Output voltage: DC 5-24 V stab., DC 24 V unstab. and AC 24 V.
- Exceeded current limit values is indicated by LED flashing.
- When there is full short-circuit, output is disconnected, output current is limited by an electronic fuse.
- 3-MODULE, DIN rail mounting.

#### Nonstabilized power supply ZNP-10-24V


- AC and DC output voltage 24 V, nonstabilized.
- Power supply with fixed output voltage.
- Protection against short-circuit and overload by a safety fuse.
- Input voltage: AC 230 V.
- 3-MODULE, DIN rail mounting.

#### Description

ZSR-30

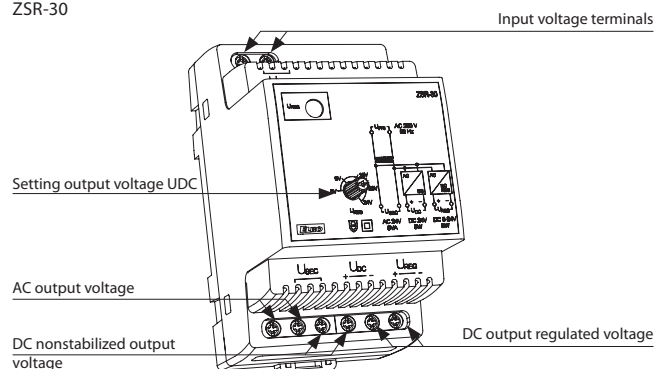


ZNP-10-24V

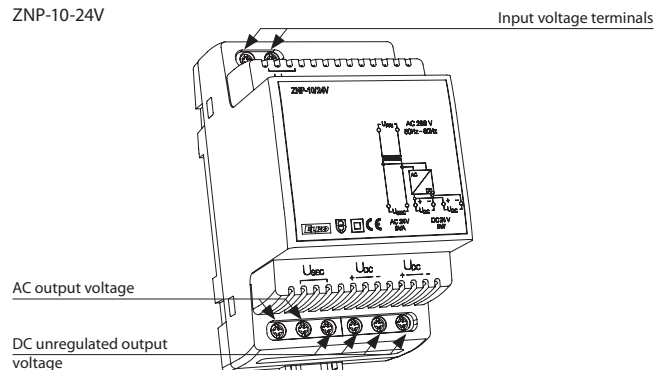


#### Connection

ZSR-30



ZNP-10






EAN code  
ZTR-8-8V: 8595188136808  
ZTR-8-12V: 8595188136815  
ZTR-15-12V: 8595188139281

Technical parameters		ZTR-8-8	ZTR-8-12	ZTR-15-12
Entry (U prim)				
Voltage range:	AC 230 V / 50 Hz			
Supply voltage tolerance:	± 10 %			
Consumption without load (max):	70 %			
Output (Usec)				
Output voltage:			AC 4 V AC 8 V AC 12 V	
	AC 8 V	AC 12 V		
Output voltage-no load AC:	12 V	16 V	16 V	
Max.loadability:	8 A	8 VA	4V 5VA, 8V 10 VA, 12 V 15VA	
Fuse:	short-circ.resistant			
Other information				
Operating temperature:	-20.. +40°C (-4 °F to 104 °F)			
Storing temperature:	-20.. +60°C (-4 °F to 140 °F)			
Electrical strenght (prim/sec):	4 kV			
Protection degree:	IP20 / 40			
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)			
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1,4" x 2.6")		90 x 52 x 65 mm (3.5" x 2" x 2.6")	
Weight:	314 g (11.1 oz.)	312 g (11 oz.)	350 g (12.3 oz.)	


- Designated for general use – e.g. for home bells supply, door locks supply.
  - Input voltage: AC 230 V.
  - Universal power supply with AC input voltage.
  - Short-circuit-proof, doubled output terminals.
- 
- 2-MODULE, DIN rail mounting.  
ZTR-8-8: output voltage 8 V.  
ZTR-8-12: output voltage 12 V.
- 
- 3-MODULE, DIN rail mounting.  
ZTR-15-12: output voltage 4, 8,12V.

Connection


ZTR-8-8




ZTR-8-12




ZTR-15-12




SOU



**SOU-1**  
Twilight switch.  
Voltage range:  
AC 230 V or  
AC/DC 12-240 V  
Output contact:  
1x changeover/SPDT  
16 A.



**SOU-2**  
Twilight switch with  
digital time clock.  
Voltage range:  
AC 230 V / 50 - 60 Hz  
Output contact:  
1x changeover/SPDT 8 A.



**SOU-3**  
Twilight and light switch.  
Voltage range:  
AC 230 V / 50 - 60 Hz  
Output contact:  
1x NO/SPST 16 A.


Accessories of twilight switches




**Photosensor SKS**  
Protection degree: IP44.  
It is suitable for mounting on  
the wall or in panel.

MEMORY RELAYS

MR




**MR-41**  
Voltage range:  
AC 230 V or  
AC/DC 12 -240 V  
Output contact:  
1x changeover/SPDT  
16 A.




**MR-42**  
Voltage range:  
AC 230 V or  
AC/DC 12 -240 V  
Output contact:  
2x changeover/DPDT  
16 A.

CONTROL AND SIGNALLING DEVICES

USS



**USS**  
Designated for switching,  
controlling and signalling  
by auxiliary any power  
circuits.



SWITCHES,  
PUSH  
BUTTONS

SWITCHES  
WITH GLOW LAMP

SIGNALLING  
LIGHT

BLIND  
FLANGE

Type	Design	Power supply	Output contact	Other				Designation	Page of catalogue
				LED indication	Display	Internal sensor	External sensor		
SOU-1	1M-DIN	AC 230 V/50-60 Hz	1x 16 A changeover	●	x	x	●	Is used to control lights on the basis of ambient light intensity	61
		AC/DC 12-240 V (AC 50-60 Hz)							
SOU-2	2M-DIN	AC 230 V/50-60 Hz	1x 8 A changeover	x	●	x	●	Is used for control of lights on the basis of ambient light intensity and real time (combination of SOU-1 and time switch clock SHT-1 in one device)	62
SOU-3	IP65	AC 230 V/50-60 Hz (AC 50-60 Hz)	1x 16 A NO-SPST	x	x	●	x	Is used as control of the device on the basis of ambient light intensity	63

Type	Design	Power supply	Output contact	Other			Designation	Page of catalogue
				LED indication	Control output	Function		
MR-41	1M-DIN	AC 230 V/50-60 Hz	1x 16 A changeover	●	●	1	Latching relays, controlled by buttons from several locations can replace three way switches or cross bar switches thanks to control by buttons (unlimited number, connected in parallel by 2 wires), installation gets more transparent and faster for mounting.	64
		AC/DC 12-240 V (AC 50-60 Hz)						
MR-42	1M-DIN	AC 230 V/50-60 Hz	2x 16 A changeover	●	●	2		64
		AC/DC 12-240 V (AC 50-60 Hz)						




EAN code  
SOU-1/230 V + SKS: 8595188121002  
SOU-1/UNI + SKS: 8595188121019  
Photosensor SKS: 8594030337288

SKS


Technical parameters		SOU-1
Supply terminals:		A1 - A2
Voltage range:	UNI	AC/DC 12 - 240 V (AC 50 - 60 Hz)
Burden:		AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Voltage range:	230	AC 230 V / 50 - 60 Hz
Power input (apparent/loss):		AC max. 12 VA / 1.8 W
Supply voltage tolerance:		-15 %; +10 %
Supply indication:		green LED
Time delay:		0 - 2 min
Time delay setting:		potentiometer
Illumination rang 1):		1 - 100 lx
Illumination rang 2):		100 - 50000 lx
Output		
Number of contacts:		1x changeover / SPDT (AgSnO <sub>2</sub> )
Current rating:		16 A / AC1
Breaking capacity:		4000 VA / AC1, 384 W / DC
Inrush current:		30 A / < 3 s
Switching voltage:		250 V AC1 / 24 V DC
Output indication:		red LED
Mechanical life:		3x10 <sup>7</sup>
Electrical life (AC1):		0.7x10 <sup>5</sup>
Control		
Power the control input:		0.8 - 530 mVA
Load between S-A2:		Yes
Control. terminals:		A1-S
Glow tubes connctions:		230 V - Yes / UNI - No
Max. amount of glow lamps connected to controlling input:		UNI - glow lamps cannot connected, 230 V - max. amount 20 pcs (measured with glow lamp 0.68 mA / 230 V AC)
Impulse length:		min. 25 ms / max. unlimited
Reset time:		150 ms
Other information		
Operating temperature:		-20 °C to +55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to +70 °C (-22 °F to 158 °F)
Electrical strength:		4 kV (supply - output)
Operating position:		any
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel / IP20 terminals
Sensor cable length:		max. 50 m (standard wire)
Overvoltage category:		III.
Pollution degree:		2
Max. cable size (mm <sup>2</sup> ):		solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)
Dimensions of the sensor SKS:		66 x Ø 23.5 mm (2.6" x Ø 0.9")
Weight of sensor SKS:		20 g (0.7 oz.)
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:		(UNI) - 75 g (2.6 oz.), (230) - 65 g (2.3 oz.)
Standards:		EN 60255-6, EN 61010-1

- Is used to control lights on the basis of ambient light intensity.
- Used for switching street illumination and garden lights, illumination of advertisements, shop windows, etc.
- Level of ambient intensity is monitored by an external sensor and output is switched according to set level on the device.
- Control input for additional control, e.g. time switch, preswitch etc.
- Level of illumination adjustable in two ranges:  
1 - 100 lx and 100 - 50000 lx.
- Adjustable time delay to eliminate short term fluctuation in illumination.
- External sensor IP44 suitable for mounting on the wall (cover and holder of a sensor are a part of the package).
- Supply voltage AC 230 V or AC/DC 12 - 240 V.
- Output contact: 1x changeover/ SPDT 16 A.
- Red LED output indication.
- 1-MODULE, DIN rail mounting.

## Description

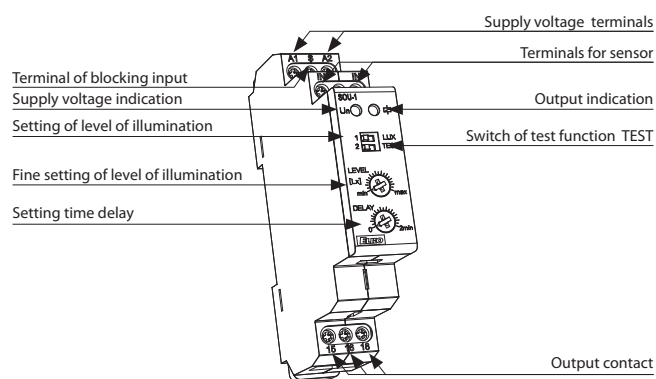


## Connection

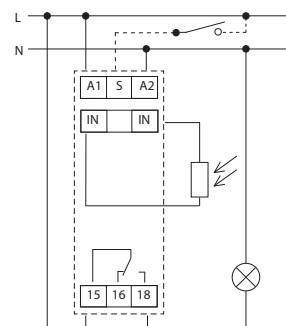


## Description of DIP switch

## Function

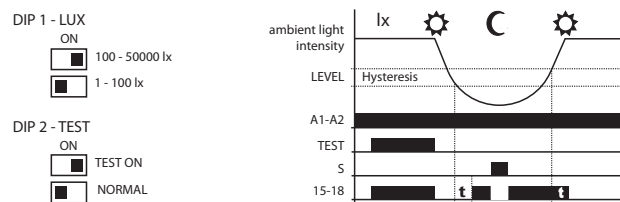

## Symbol



SOU-2 | Twilight switch with digital time switch clock




EAN code  
SOU-2 + SKS: 8595188130523  
SOU-2: 8595188121644  
Photosensor SKS: 8594030337288


Technical parameters		SOU-2
Supply terminals:	A1 - A2	
Voltage range:	AC 230 V / 50 - 60 Hz	
Burden:	max. 4 VA	
Voltage range:	-15 %; +10 %	
Back-up supply:	yes	
Type of backup battery:	CR 2032 (3V)	
Summer / winter time:	automatic	
Output		
Number of contacts:	1x changeover / SPDT (AgSnO <sub>2</sub> )	
Current rating:	8 A / AC1	
Breaking capacity:	2000 VA / AC1, 240 W / DC	
Switching voltage:	250 V AC1 / 30 V DC	
Mechanical life:	1x10 <sup>7</sup>	
Electrical life (AC1):	1x10 <sup>5</sup>	
Time circuit		
Power back-up:	3 years	
Accuracy:	max. ±1 s day (23 °C / 73.4 °F)	
Minimum interval:	1 min	
Data stored for:	min. 10 years	
Program circuit		
Illumination range:	10-50000 lx	
Program place number:	100	
Program period:	daily, weekly, yearly	
Data readout:	LCD display, illuminated by back up	
Other information		
Operating temperature:	-10 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5, with sleeve max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	127 g (4.48 oz.)	
Dimensions of the sensor SKS:	66 x Ø 23.5 mm (2.6" x Ø 0.9")	
Weight of sensor SKS:	20 g (0.7 oz.)	
Standards:	EN 61812-1, EN 61010-1, EN 60255-6; EN 60730-1; EN 60730-2-7	

- Is used for control of lights on the basis of ambient light intensity and real time (combination of SOU-1 and time switch clock SHT-1 in one device).
- Time clock can override the light sensor for applications when lights are not required.
- Adjustable light intensity 10-50000 lx.
- Function „random switching“ enables simulation of presence in a house when nobody is at home.
- Switching: according to a program (AUTO) / permanently manual / random (CUBE).
- External sensor IP44 issuitable for mounting on the wall / in panel (cover and sensors are part of delivery).
- Sealable transparent cover of front panel.
- Backup of data and time by battery (reserve battery up to 3 years).
- Easy replacement of backup battery with plug-in module located on front panelof device (no disassembly required).
- 2-MODULE, DIN rail mounting .


Description

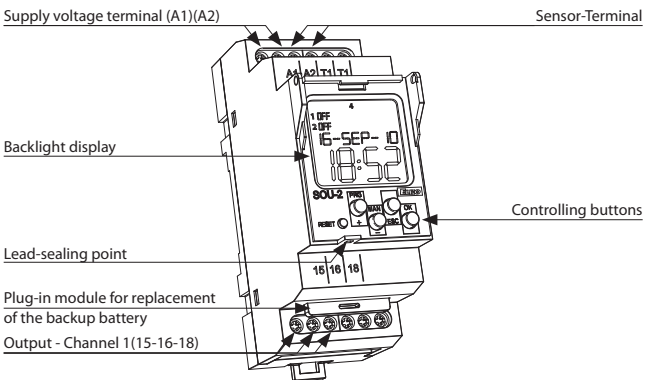


Description of visual elements on the display

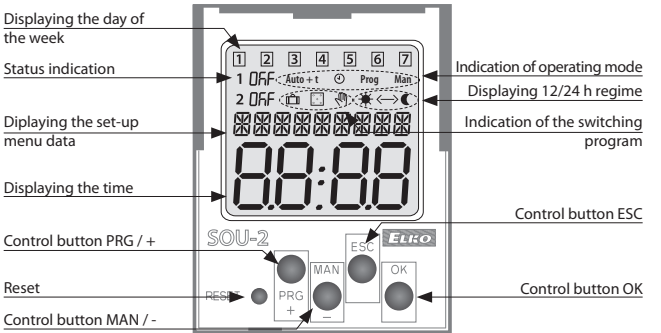

Connection



Symbol



Plug-in module








EAN code  
SOU-3 / 230 V: 8595188140560

Technical parameters		SOU-3
Supply		
Supply terminals:	L - N	
Voltage range:	AC 230 V / 50 - 60 Hz	
Tolerance of voltage range:	- 15 % .. +10 %	
Input (apparent/loss):	max 6 VA / 0.7 W	
Setting the scale level of lighting		by jumper J2
Function ☾ (twilight switch)		
- range 1:	1 ... 10 lx	
- range 2:	10 ... 100 lx	
- range 3:	100 ... 1.000 lx	
Function ☀ (light switch)		
- range 1:	100 ... 1 000 lx	
- range 2:	1 000 ... 10 000 lx	
- range 3:	10 000 ... 100 000 lx	
Setting function	by jumper J3	
Level of light-slight:	0.1 ... 1 x range	
Slight setting of light level:		
	potenciometer	
Time delay t:	0 / 1 min. / 2 min.	
Delay setting t:	by jumper J1	
Output		
Output contact:	1x NO- SPST (AgSnO <sub>2</sub> )	
Current rating:	12 A / AC1	
Switching output:	3000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switched voltage:	250 V AC / 24 V DC	
Mechanical life:	3 x 10 <sup>7</sup>	
Electrical life:	0.7 x 10 <sup>5</sup>	
Other information		
Operation temperature:	-30 °C to +60 °C (-22 °F to 140 °F)	
Storing temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply-output)	
Operation position:	sensor-side down or on the sides	
Protection degree:	IP 65	
Overvoltage category:	III.	
Pollution level:	2	
Max. cable size (mm²):	max. 1x 2.5, max. 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Suggested power-supply cable:	CYKY 3x 2.5 (CYKY 4x 1.5)	
Dimensions:	96 x 62 x 34 mm (3.8" x 2.4" x 1.3")	
Weight:	122 g (4.3 oz.)	
Standards:	EN 60255-6, 61010-1	


Device is standardly supplied with jumper L-15 (3-wire connection).  
For the correct function of device is necessary sensor-side down device mounting.

- Is used as control of the device on the basis of ambient light intensity.
- External version in IP65, box for mounting on the wall, front cover removable without screws.
- Built in high resolution light sensor.
- Two devices in one, function is set by jumper:
  - twilight switch - contact closes by decreasing of ambient light intensity, and opens by its increasing.
  - light switch - contact closes by increasing ambient light intensity, and opens by decreasing light intensity. Used for switching of devices by reaching of pre-set ambient light level, usually sun shine (pulling down the shutters or blinds, activation of solar panels).
- 3 adjustable (by jumper) ranges of light level.
- 3 adjustable levels of time delay (for elimination of short-term fluctuations of light intensity - for short increases in light intensity).
- Supply voltage 230 V AC.
- Potential-free output contact 12 A / AC1 switching.


## Description

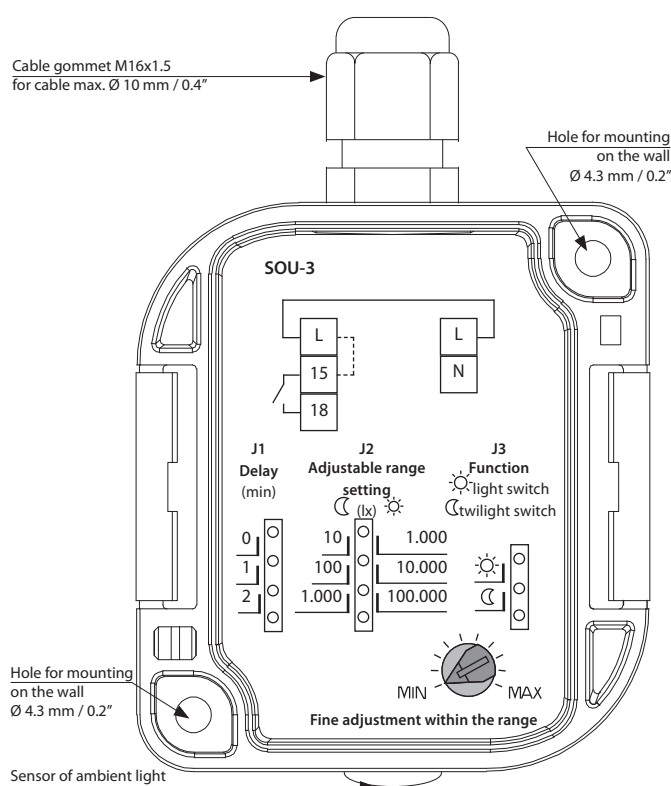

## Connection

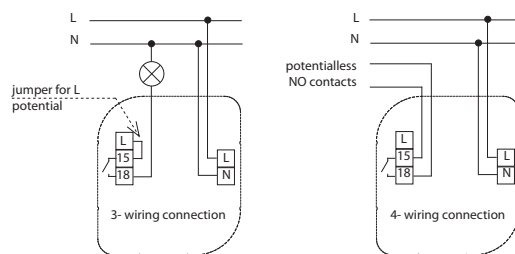

## Function

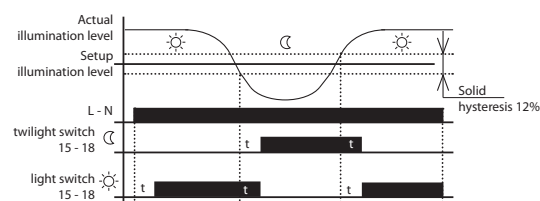




EAN code  
MR-41 /230 V: 8595188115889  
MR-41 /UNI: 8595188115896  
MR-42 /230 V: 8595188115902  
MR-42 /UNI: 8595188115919


Technical parameters	MR-41	MR-42
Number of functions:	1	2
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Burden:	AC 0.17 - 3 VA / DC 0.1 - 1.2 W	AC 0.17 - 12 VA / DC 0.11 - 1.9 W
Voltage range:	AC 230 V / 50 - 60 Hz	
Consumption (apparent/loss):	AC max. 12 VA / 1.2 W	AC max. 12 VA / 1.9 W
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Output		
Number of contacts:	1x changeover / SPDT (AgSnO <sub>2</sub> )	2x changeover/ DPDT (AgSnO <sub>2</sub> )
Current rating:	16 A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Controlling		
Consumption of input:	AC 0.025 - 0.2 VA / DC 0.1 - 0.7 W (UNI), AC 0.53 VA (AC 230 V)	
Load between A2-ON/OFF:	Yes	
Control. terminals:	A1 - ON/OFF	
Glow tubes connctions:	230 V - Yes / UNI - No	
Max. amount of glow lamps connected to controlling input:	UNI - glow lamps cannot be connected, 230 V - max. amount 5 pcs (measured with glow lamp 0.68 mA / 230 V AC)	
Impulse length:	min. 25 ms / max. unlimited	
Other data		
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm <sup>2</sup> ):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	(UNI)-62 g (2.2 oz.), (230)-60 g (2.1 oz.)	(UNI)-89 g (3.1 oz.), (230)-85 g (2.99 oz.)
Standards:	EN 61810-1, EN 61010-1	

- Latching relays, controlled by buttons from several locations can replace three way switches or cross bar switches thanks to control by buttons (unlimited number, connected in parallel by 2 wires), installation gets more transparent and faster for mounting.
- Relays MR-41/UNI, MR-42/UNI memorize its last state even after supply failure. During the failure relay will turn off and after re-energizing will automatically turns on.
- **MR-41**
  - output contact: 1x changeover / SPDT 16 A
- **MR-42**
  - options - 2x parallel contacts or the other relay is latching
  - function selected via external jumper between B1 - B2
  - output contact: 2x changeover /DPDT 16 A
  - Supply voltage AC 230 V or AC/DC 12-240 V
- 1-MODULE version, DIN rail mounting, controlling by buttons


Connection

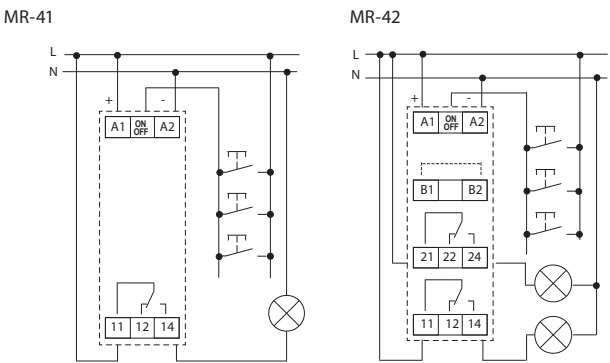

Function

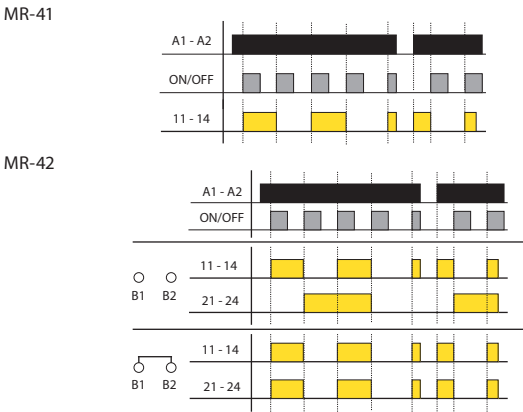

Symbol

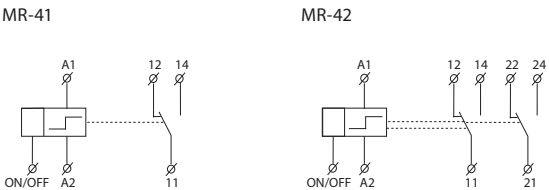

## EAN code

USS-ZM: 8595188124577  
 USS-00: 8595188124614  
 USS-01: 8595188124621  
 USS-02: 8595188124638  
 USS-03: 8595188124645  
 USS-04: 8595188124652  
 USS-05: 8595188124669  
 USS-06/S: 8595188124676  
 USS-06/R: 8595188136372  
 USS-07: 8595188124683  
 USS-08: 8595188124690  
 USS-09: 8595188124706  
 USS-10: 8595188124331  
 USS-11: 8595188124348  
 USS-12: 8595188124355  
 USS-13: 8595188124362  
 USS-14: 8595188124898  
 USS-15: 8595188124379



## Units

NAME	CONNECTION	RATED CURRENT/ VOLTAGE (FOR SWITCHES) SUPPLY VOLTAGE (FOR SIGNALLING LIGHTS)	DESCRIPTION
USS-ZM	MODUL	-	Basic MODULE (housing with terminals and contacts)
USS-00		-	Blind flange
USS-01		6 A / 250 V AC	Switch
USS-02		8 A / 250 V AC	Alternation switch
USS-03		6 A / 250 V AC	Switch with central position
USS-04		6 A / 250 V AC	Switch + button with central position
USS-05		6 A / 250 V AC	Switching button with central position
USS-06/S		8 A / 250 V AC	NO switch
USS-06/R		8 A / 250 V AC	NC switch
USS-07		10 A / 250 V AC	Switch with glow lamp (red)
USS-08		10 A / 250 V AC	Switch with glow lamp (green)
USS-09		10 A / 250 V AC	Switch with glow lamp (yellow)
USS-10		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED (red)
USS-11		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED (green)
USS-12		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED (yellow)
USS-13		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED (white)
USS-14		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED flashing (red)
USS-15		A1-A2, AC 250 V A1-A3, AC/DC 24 V	Signalling LED (blue)

- Independent switch units designed for flexible controlling and switching of power circuits.
- USS - "Do It Yourself" = it is possible to "click into" different types of switches and signalling units into the basic module.
- Units are delivered as components and configured by the user.
- 15 types of units: switches, push buttons, signal lights of different colours including flashing lights units are replaceable also for future (for example when an application is changed, extended, etc...).
- It is possible to place up to two units into one MODULE (for example 2x switch, 2x signalling lights or combinations) = saves space in switch-board panels.
- 1-MODULE (90 x 17.6 x 64 mm / 3.5" x 0.7" x 2.5"), DIN rail mounting.
- Operating temperature -20 °C to +55 °C (-4 °F to 131 °F).
- M3 screw with clamp terminals.




Switching units (01-09) are made by reputable French company - APEM. The quality of switch-buttons is guaranteed by long-term experiences in the field (from 1952) and by world-recognized certificates VDE and UL. Unique switching mechanism ensures long life of switching at constant parameters.

## Make your own device USS - easy and intelligent solution!




## BLIND FLANGE

Used to fill in an empty position in the front panel of the USS Module. Dimensions: 21 x 15 x 7 mm (0.83" x 0.59" x 0.28"). Color: Grey, RAL7035 (the same as the housing). Unit: 00



## SWITCHES, PUSH BUTTONS

They have a low uplift and a large fingerboard. High quality contacts, easy rock switch and large button area provide years of useful life. Dimensions: 21 x 15 x 20 mm (0.83" x 0.59" x 0.79"). Unit: 01-06



## SWITCHES WITH GLOW LAMP


Switch and signalization in one unit. Signalization is carried out by a glow lamp in dolly including series resistance. It is possible to instal it for permanent indication or for an intermittennd by contact of the switch.

Dimensions: 21 x 15 x 20 mm (0.83" x 0.59" x 0.79").

Colours: red, green, yellow.

Supply voltage of the signalling light: AC 250 V.

Unit: 07-09



## SIGNALLING LIGHT

High luminescence SMD/LED that illuminates the entire button area surface. Input voltage can be either AC 230 V or AC/DC 24 V (output light may vary).

Red sig. light is delivered also in a flashing version. Unit: 14

Colours: red, green, yellow, white, blue. Unit: 10-15

Dimensions: 21 x 15 x 14 mm (0.83" x 0.59" x 0.55").


## Terminal connection Laser marking



Switches and buttons are marked by laser according to your request in case you order 50 pcs and more.

## Example of an order:

USS - ZM  
 + USS - 07  
 + USS - 11

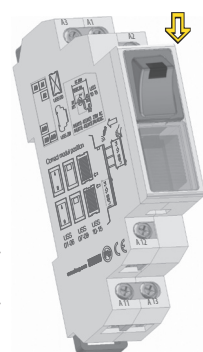

## Max. number of symbols:





Voltage

1 phase

AC/DC



**HRN-41**  
(Hysteresis) monitoring DC and AC voltage 10-500 V, divided into 3 inputs and 3 ranges, 2 independent outputs 16 A, 2x time delay.



**HRN-42**  
(Window) as HRN-41 but function WINDOW. Other functions (applicable for HRN-41): faulty state memory, hysteresis, galv. separated supply.



**HRN-34**  
as HRN-33 but in voltage range DC 6-30 V for monitoring battery circuits (6, 12, 24 V).



**HRN-64**  
as HRN-63 but in voltage range DC 6-30 V for monitoring battery circuits (6, 12, 24 V).

AC



**HRN-33**  
Supply and monitored voltage in range AC 48-276 V, 1x output for U<sub>max</sub> and U<sub>min</sub> adjustable level.



**HRN-35**  
As HRN-33 but individual output for each level (U<sub>max</sub>/U<sub>min</sub>). Adjustable time delay to eliminate voltage peaks.



**HRN-37**  
As HRN-33, but in voltage range AC 24-150 V.



**HRN-63**  
Supply and monitored voltage in range AC 48-276 V, 1x output for U<sub>max</sub> and U<sub>min</sub> adjustable level.



**HRN-67**  
as HRN-63, but in voltage range AC 24-150 V.

3 phase



**HRN-55**  
Supply from all phases.



**HRN-55N**  
Supply L1-N (monitors also disconnection of neutral wire). Time delay to eliminate peaks.



**HRN-57**  
Supply from all phases.



**HRN-57N**  
Supply L1-N (monitors also neutral wire disconnection). Adjustable voltage level.



**HRN-54**  
Supply from all phases.



**HRN-54N**  
Supply L1-N (monitors also disconnection of neutral wire). All parameters adjustable by potentiometers.



**HRN-56/120**  
Adjustable level U<sub>min</sub>.



**HRN-56/208**  
Adjustable level U<sub>min</sub>.



**HRN-56/240**  
Adjustable level U<sub>min</sub>.



**HRN-56/400**  
Adjustable level U<sub>min</sub>.



**HRN-56/480**  
Adjustable level U<sub>min</sub>.



**HRN-56/575**  
Adjustable level U<sub>min</sub>.



**HRN-43**  
Galvanically separated supply AC 230V, AC 400 or AC/DC 24V, memory, adjustable hysteresis and delay, 2 x independent output.



**HRN-43N**  
Galvanically separated supply AC 230V, AC 400 or AC/DC 24V, memory, adjustable hysteresis and delay, 2 x independent output.



**MPS-1**  
Optical signaling of three-phase network.



Frequency



**HRF-10**  
for monitoring the frequency of AC voltage. The monitored frequency 50/60/400 Hz is selected by a switch.



Power factor



**COS-2**  
monitors and scores power factor (phase shift between current and voltage cos φ) in 3phase/1phase circuits (motors, pumps etc.).

## A Current

### AC/DC



**PRI-41**  
(Hysteresis) 3 inputs divided into 3 ranges (selectable by a switch).



**PRI-42**  
(Window) as PRI-41 but function "WINDOW".

### AC



**PRI-32**  
Monitoring by current transformer (wire through an opening, galv. separated, without heat loss), adjust. current 1-20A, multivoltage AC 24-240 and DC 24V, output 8A changeover.



**PRI-51**  
Monitoring of current by in-built transformer, 5 ranges (in versions 1/2/5/8/16A), range 5A is suitable for current transformer (X/5), supply and output as PRI-32, difference from PRI-32: direct monitoring and finer ranges (higher sensitivity) = higher accuracy in measuring.



**PRI-52**  
For scanning the current up to 25 A. Long distance device diagnostics (black-out, increase of take-off) Priority relay. Supplying voltage AC 230 V Output 8A/ SPST switching over.



**PRI-53**  
For monitoring the current in three-phase devices. Power supply: 24-240 V AC/DC, galvanically separated from the circuit of the monitored current 2 types depending on the strength of rated current In (1A, 5A).

## Level

INNOVATION



**HRH-8**  
8 functions, advanced setting for various combinations, galvanically separated supply AC 230 V or AC/DC 24 V, 2 output contacts / 2PDT 16A.



**HRH-5**  
Simple version, 2 functions, galvanically separated supply voltage UNI 24.. 240 V AC/DC.



**HRH-6**  
Device monitors 5 levels by using six probes. Supply voltage: 12-24 V DC or galvanically separated 230 V AC.




**HRH-6/S**  
Additional signalization to HRH-6 with 6 control lights on the front panel of device.




**HRH-7**  
Suitable to operate in harsh conditions due to the high degree of protection IP65. Switch monitors the level changes in wells, reservoirs, tanks, tankers etc.


### Level sets




**HRH-4**  
A set of level relay HRH-5 and a contactor VS425. For automatic operation 1-phase and 3-phase pumps. 2 function. IP55.



**HRH-VS**  
Level sets are used to monitor fluid levels.



**HRH-MS-1A**  
**HRH-MS-1.6A**  
Level sets are used to monitor fluid levels.




**HRH-MS-VS-2.5A**  
**HRH-MS-VS-4A**  
**HRH-MS-VS-6.3A**  
Level sets are used to monitor fluid levels.

## Accessories



**SHR**  
Level sensors  
SHR-1 (M, N) - for monitoring flooding.  
SHR-2 - for level detection.  
SHR-3 - for demanding and industrial environment.



**Cable, wire**  
D03VV-F 3x0,75/3,2 - cable to SHR-1 and SHR-2 probes.  
D05V-K 0,75/3,2 - wire to SHR-1 and SHR-2 probes.

Relays monitor voltage

Type	Design	Voltage	Secure variables							Setting			Description	Page
			Phases	Range	> U	< U	Failure	Phase sequence	Asymmetry	Delay	Hysteresis	Memory Errors		
HRN-33	1-M	from monitored	1	AC 48 - 276 V	●	●	x	x	x	●	x	x	For all types, the delay is adjustable from 0 - 10 seconds (to eliminate short-term outages or peaks). The lower voltage level (Umin) is set in % of the upper level (Umax).	70
HRN-34	1-M	from monitored	1	DC 6 - 30 V	●	●	x	x	x	●	x	x		
HRN-35	1-M	from monitored	1	AC 48 - 276 V	●	●	x	x	x	●	x	x		
HRN-37	1-M	from monitored	1	AC 24 - 150 V	●	●	x	x	x	●	x	x		
HRN-63	1-M	from monitored	1	AC 48 - 276 V	●	●	x	x	x	●	x	x		
HRN-64	1-M	from monitored	1	DC 6 - 30 V	●	●	x	x	x	●	x	x		
HRN-67	1-M	from monitored	1	AC 24 - 150 V	●	●	x	x	x	●	x	x		
HRN-41/230V HRN-41/110V HRN-41/400V HRN-41/24V	3-M	AC 230 V AC 110 V AC 400 V AC/DC 24 V	1	AC/DC 50 V AC/DC 160 V AC/DC 500 V	●	●	x	x	x	●	●	●	Second relay function (independent/parallel). Galvanically separated power supply from measuring inputs.	72
HRN-42/230V HRN-42/110V HRN-42/400V HRN-42/24V	3-M	AC 230 V AC 110 V AC 400 V AC/DC 24 V	1	AC/DC 50 V AC/DC 160 V AC/DC 500 V	●	●	x	x	x	●	●	●		
HRN-43/230V HRN-43/110V HRN-43/400V HRN-43/24V	3-M	AC 230 V AC 110 V AC 400 V AC/DC 24 V	3	AC 3 x 84 - 480 V	●	●	●	●	●	●	●	●	2 output relays, functions of the second relay may be selected (independent/parallel). Galvanically separated power supply.	74
HRN-43N/230V HRN-43N/110V HRN-43N/400V HRN-43N/24V	3-M	AC 230 V AC-110 V AC 400 V AC/DC 24 V	3	AC 3 x 48 - 276 V	●	●	●	●	●	●	●	●		
HRN-55	1-M	from monitored	3	AC 3 x 300 - 500 V	x	x	●	●	x	●	x	x	Power supply from all phases, i.e. the relay function is preserved even if one phase fails.	77
HRN-55N	1-M	from monitored	3	AC 3 x 172 - 287 V	x	x	●	●	x	●	x	x	Power supply L1-N, i.e. the relay also monitors the neutral wire interruption.	77
HRN-57	1-M	from monitored	3	AC 3 x 300 - 500 V	●	●	●	x	x	●	x	x	Power supply from all phases, i.e. the relay function is preserved even if one phase fails.	79
HRN-57N	1-M	from monitored	3	AC 3 x 172 - 287 V	●	●	●	x	x	●	x	x	Power supply L1-N, i.e. the relay also monitors the neutral wire interruption, replacement for HRN-52.	79
HRN-54	1-M	from monitored	3	AC 3 x 300 - 500 V	●	●	●	●	x	●	x	x	If the supply voltage falls below 60% of Un (OFF lower level), the relay will immediately disconnects with no delay. Power supply from all phases, i.e. the relay function is preserved even if one phase fails.	76
HRN-54N	1-M	from monitored	3	AC 3 x 172 - 287 V	●	●	●	●	x	●	x	x	If the supply voltage falls below 60% of Un (OFF lower level), the relay will immediately disconnects with no delay. Power supply L1-N, i.e. the relay also monitors the neutral wire interruption.	76
HRN-56/120 HRN-56/208 HRN-56/240 HRN-56/400	1-M	from monitored	3	AC 3 x 72 - 160 V AC 3 x 125 - 276 V AC 3 x 144 - 276 V AC 3 x 240 - 460 V	x	●	●	●	x	●	x	x	Thanks to the power supply from all three phases, the relay is operational even if one phase fails.	78
HRN-56/480 HRN-56/575	3-M	from monitored	3	AC 3 x 228 - 550 V AC 3 x 345 - 660 V	x	●	●	●	x	●	x	x		

Signal relays

MPS-1	1-M	from monitored	3	AC 3 x 50 - 253 V	x	●	●	●	x	x	x	x	Optical signaling of three-phase network.	80
-------	-----	----------------	---	-------------------	---	---	---	---	---	---	---	---	---	----

Relay for frequency monitoring

Type	Design	Supply voltage	Secure variables				Setting				Description	Page
			Phases	Frequency Range	Frequency $\wedge$	Frequency $\vee$	Delay	Hysteresis	Frequency $\wedge$	Frequency $\vee$		
HRF-10	3-M	AC 161 - 346 V	1	40 - 60 Hz 48 - 72 Hz 320 - 480 Hz	●	●	●	●	●	●	Switchable ranges of rated frequency .	81



Relay for factor  $\cos\phi$  monitoring

Type	Design	Supply voltage	Secure variables				Setting			Description	Page
			Phases	$\cos\phi$ range	$> \cos\phi$	$< \cos\phi$	Delay	Hysteresis	Memory Errors		
COS-2/230V COS-2/110V COS-2/400V COS-2/24V	3-M	AC 230 V AC 110 V AC 400 V AC/DC 24 V	3	0.1 - 0.99	●	●	●	●	●	Two output relays, one independent relay for each level Galvanically separated power supply.	82

## Relay for current monitor

Type	Design	Supply voltage	Secure variables				Setting					Description	Page
			Phases	Range	$I_{\Delta}$	$I_{\nabla}$	Delay	Hysteresis	Memory Errors	$I_{\Delta}$	$I_{\nabla}$		
PRI-32	1-M	AC 24-240 V DC 24 V	1	AC 1-20 A	●	x	x	x	x	●	x	Exceeding the current value - the current flowing through the monitored conductor must not exceed 100 A even on a short-term basis.	84
PRI-41/230V PRI-41/24V	3-M	AC 230 V AC/DC 24 V	1	AC/DC 1.6 A AC/DC 5 A AC/DC 16 A	●	●	●	●	●	●	●	The adjustable delay for elimination of short-term outages and peaks for every level. Galvanically separated power supply.	86
PRI-42/230V PRI-42/24V	3-M	AC 230 V AC/DC 24 V	1	AC/DC 1.6 A AC/DC 5 A AC/DC 16 A	●	●	●	●	●	●	●	The adjustable delay for elimination of short-term outages and peaks for every level. Galvanically separated power supply.	86
PRI-51/0.5 PRI-51/1 PRI-51/2 PRI-51/5 PRI-51/8 PRI-51/16	1-M	AC 24-240 V DC 24 V	1	AC 0.05 - 0.5 A AC 0.1 - 1 A AC 0.2 - 2 A AC 0.5 - 5 A AC 0.8 - 8 A AC 1.6 - 16 A	●	x	●	x	x	●	x	May be used for scanning the current from the current transformer - up to 600A. Power supply is galvanically separated from the measured current.	85
PRI-52	1-M	AC 230 V	1	AC 0.5 - 25 A	●	x	●	x	x	●	x	May be used for scanning the current from the external current transformer - up to 600A.	88
PRI-53/1 PRI-53/5	6-M	AC/DC 24-240 V	3	AC 3 x 0.4 - 1.2 A AC 3 x 2 - 6 A	●	●	●	x	x	●	●	Monitors the drop in the strength of current below the preset value. Monitors exceeding the preset value.	89

## Level switches

Type	Design	Supply voltage	Secure variables		Setting			Description	Page
			Level max.	Level min.	Delay	Sensitivity Probe	Function		
HRH-8/230V HRH-8/110V HRH-8/400V HRH-8/24V	3-M	AC 230 V AC 110 V AC 400 V AC/DC 24 V	●	●	●	●	●	Sensitivity adjustable by potentiometer. Galvanically separated power supply.	96
HRH-4/230V HRH-4/24V	set	AC 230 V AC/DC 24 V	●	●	●	●	●	Unit with no protection devices - adequate protection element needs to be integrated before the unit. Ingress protection of the assembly is IP55.	91
HRH-5	1-M	AC/DC 24-240 V	●	●	●	●	●	Measuring the frequency of 10 Hz will protect liquid from polarisation and measuring probes from increased oxidation. Galv. separated power supply.	90
HRH-6/AC HRH-6/DC	box IP65	AC 230 V AC/DC 12-24V	●	●*	●	●	●	* devices mainly designated for monitoring water level in fire-engine tanks.	92
HRH-7	box IP65	AC/DC 24-240 V	●	●	●	●	●	suitable to work in harsh conditions due to the high degree of protection IP65.	94
HRH-VS	set	230 / 400V AC 50-60 Hz	●	●	●	●	●	Level sets placed in the control cabinet with IP65 protection (protected against dust and spraying water) where everything is already connected.	98
HRH-MS-1A HRH-MS-1.6A	set	230 / 400V AC 50-60 Hz	●	●	●	●	●		
HRH-MS-VS-2.5A HRH-MS-VS-4A HRH-MS-VS-6.3A	set	230 / 400V AC 50-60 Hz	●	●	●	●	●		




EAN code  
 HRN-33: 8595188115636  
 HRN-34: 8595188115643  
 HRN-35: 8595188115650  
 HRN-37: 8595188130615  
 HRN-63: 8595188130622  
 HRN-64: 8595188130639  
 HRN-67: 8595188130646


Technical parameters	HRN-33 / HRN-63	HRN-34 / HRN-64	HRN-35	HRN-37 / HRN-67
Supply and measuring				
Terminals:	A1 - A2	A1 - A2	A1 - A2	A1 - A2
Voltage range:	AC 48 - 276 V / 50-60Hz	DC 6 - 30 V	AC 48 - 276 V / 50-60Hz	AC 24-150 V / 50-60Hz
Burden:	AC max. 1.2 VA	DC max. 1.2 VA	AC max. 1.2 VA	AC max. 1.2 VA
Upper level (Umax):	AC 160 - 276 V	DC 18 - 30 V	AC 160 - 276 V	AC 80-150 V
Bottom level (Umin):	30-95 % Umax	35-95 % Umax	30-95 % Umax	30-95 % Umax
Max. permanent:	AC 276 V	DC 36 V	AC 276 V	AC 276 V
Peak overload < 1 ms:	AC 290 V	DC 50 V	AC 290 V	AC 290 V
Time delay:	adjustable 0 - 10 s			
Accuracy				
Setting accuracy (mechanical):	5 %			
Repeat accuracy:	<1 %			
Dependance on temperature:	< 0.1 % / °C (°F)			
Tolerance of limit values:	5 %			
Hysteresis (from fault to normal):	2 - 6 % of adjusted value (only HRN-33, HRN-34, HRN-35, HRN-37)			
Output				
Number of contacts:	1x changeover/ SPDT (AgNi / Silver Alloy)	1x changeover/ SPDT (AgNi / Silver Alloy)	1x changeover for each level of voltage, (AgNi)	1x changeover/ SPDT (AgNi / Silver Alloy)
Current rating:	16 A / AC1			
Breaking capacity:	4000 VA / AC1, 384 W / DC			
Inrush current:	30 A / < 3 s			
Switching voltage:	250 V AC1 / 24 V DC			
Output indication:	red / green LED			
Mechanical life:	3x10 <sup>7</sup>			
Electrical life (AC1):	0.7x10 <sup>5</sup>			
Other information				
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)			
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)			
Electrical strength:	4 kV (supply - output)			
Operating position:	any			
Mounting:	DIN rail EN 60715			
Protection degree:	IP40 from front panel, IP20 terminals			
Overvoltage cathegory:	III.			
Pollution degree:	2			
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5, with sleeve max. 1x 2.5 (AWG 12)			
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")			
Weight:	61 g (2.2 oz.)	73 g (2.6 oz.)	85 g (3 oz.)	61 g (2.2 oz.)
Standards:	EN 60255-6, EN 61010-1			

- It serves to control supply voltage for appliances sensitive to supply tolerance, protection of the device against under/over voltage.
- HRN-3x is band voltage relay, HRN-6x is over/under voltage relay. For difference - see graph of function.
- **HRN-33, HRN-63**
  - monitors voltage in range AC 48 - 276 V
  - Umax and Umin can be monitored independently
- **HRN-34, HRN-64**
  - like HRN-33, but voltage range is DC 6 - 30 V
  - monitoring of battery circuits (24 V)
- **HRN-35**
  - like HRN-33, but independent output relays for each voltage level
  - switching of other loads possible
- **HRN-37, HRN-67**
  - like HRN-33, monitors voltage in range AC 24 - 150 V
  - it is possible to monitor level of overvoltage and undervoltage independently
- Adjustable time delay for all types is 0 - 10 s (to eliminate short voltage drops or peaks).
- Voltage Umin adjusted as % of Umax.
- 3-state indication - LEDs indicating normal state and 2 fault states.
- Supply from monitored voltage (monitors level of its own supply).
- 1-MODULE, DIN rail mounting.


### Description

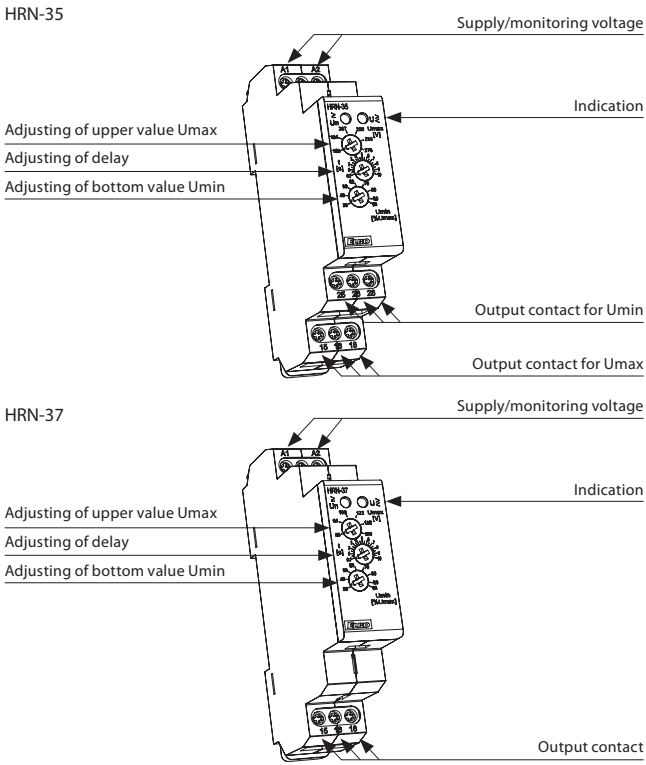


### Connection

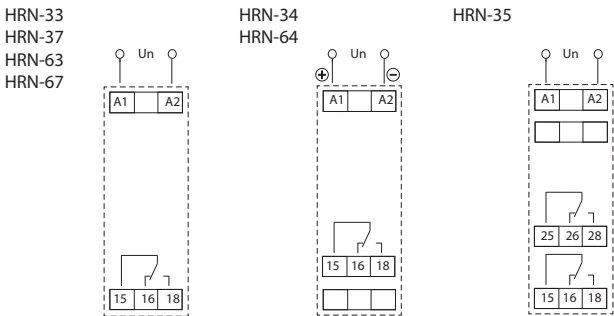


## Function HRN-33, 34, 35, 37 (band voltage relay)

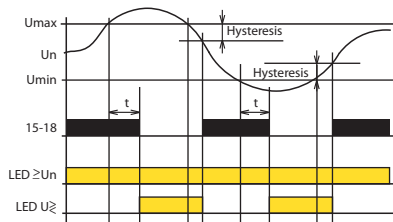 HRN-33,  
HRN-37


HRN-34

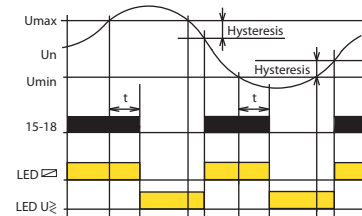


HRN-35

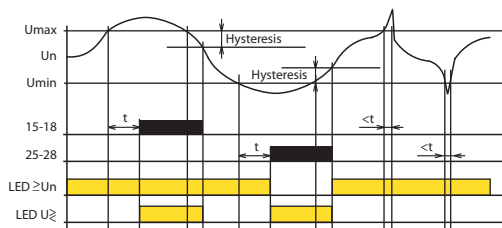

Monitoring relay series HRN-3x monitors level of voltage in single - phase circuits. Monitored voltage serves also as supply voltage. It is possible to set two independent (all occurrences) levels of voltage, when exceeded the output is activated. HRN-33 and HRN-34 - in normal state the output relay is permanently switched. It switches off when there is a limit settings. This combination of linkage of the output relay is advantageous when the full failure of supply (monitored) voltage is considered to be a faulty state in the same way as a decrease of voltage within the set level. Output relay is in both situations always switched off.

Differently HRN-35 version uses independent relay for each level, in normal state it is switched off. If the upper level is exceeded (for example overvoltage) 1 relay switches on, when the bottom level (e.g. undervoltage) is exceeded 2 relay switches. It is thus possible to see the particular faulty state. To eliminate short peaks in the main the time delay, which is possible to be set in range 0 - 10 s, is used. It functions when changing from normal to faulty state and prevents unavailing pulsation of the output relay caused by parasitive peaks. Time delay doesn't apply when changing from faulty to normal state, but hysteresis (1-6% depends on the voltage setting) apply. Thanks to changeover contacts it is possible to get other configurations and functions according to actual requirements of the application.

## Function HRN-63, 64, 67 (over/under voltage relay)

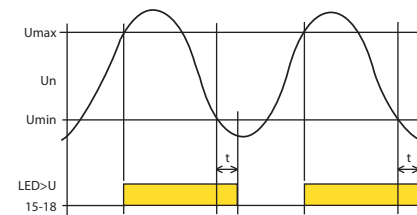 HRN-63,  
HRN-64,  
HRN-67




## Legend:

Umax - upper adjustable level of voltage  
Un - measured voltage  
Umin - bottom adjustable level of voltage  
15-18 - switching contact of output relay No.1  
25-28 - switching contact of output relay No. 2


LED  $\geq U_n$  - green indicator light  
LED  $U \geq$  - red indicator light  
LED  $U >$  - red indicator light

Monitoring relay line HRN-6x serves to monitor levels of voltage in single-phase or DC circuits. Monitored voltage is in the same time also supply voltage. It is possible to set two independent levels of voltage. When Umax is exceeded, output is activated. In case voltage level falls below Umin, output is deactivated. This combination is advantageous when full absence of supply voltage is understood as faulty state, as well as voltage drop within the set level. To eliminate short voltage peaks in the main there is time delay which can be set in a range of 0-10 sec. Such delay applies in case of going from overvoltage to undervoltage. In case of returning from undervoltage to overvoltage this delay doesn't apply. Thanks to changeover output contacts it is possible to reach various configurations and functions according to requirements or an application.

## Symbol

 HRN-33  
HRN-37  
HRN-63  
HRN-67

 HRN-34  
HRN-64


HRN-35




## Indication LED

HRN-33, HRN-37




Normal state  
 $U_{min} < U_n < U_{max}$   
Green LED = ON  
Red LED = OFF




Exceeded Umax (overvoltage)  
Drop below Umin (undervoltage)  
 $U_n > U_{max}$  or  $U_n < U_{min}$   
Green LED = ON  
Red LED = ON

HRN-34




Normal state  
 $U_{min} < U_n < U_{max}$   
Green LED = ON  
Red LED = OFF




Exceeded Umax (overvoltage)  
Drop below Umin (undervoltage)  
 $U_n > U_{max}$  or  $U_n < U_{min}$   
Green LED = OFF  
Red LED = ON

HRN-63, HRN-67




Exceeded Umax (overvoltage)  
 $U_n > U_{max}$   
Green LED = ON  
Red LED = ON




Drop below Umin (undervoltage)  
 $U_n < U_{min}$   
Green LED = ON  
Red LED = OFF

HRN-64




Exceeded Umax (overvoltage)  
 $U_n > U_{max}$   
Green LED = OFF  
Red LED = ON




Drop below Umin (undervoltage)  
 $U_n < U_{min}$   
Green LED = ON  
Red LED = OFF


HRN-35



Normal state  
 $U_{min} < U_n < U_{max}$   
Green LED = ON  
Red LED = OFF



Exceeded Umax (overvoltage)  
 $U_n > U_{max}$   
Green LED = ON  
Red LED = ON



Drop below Umin (undervoltage)  
 $U_n < U_{min}$   
Green LED = OFF  
Red LED = ON




EAN code  
HRN-41 / 110V: 8595188140430  
HRN-41 / 230V: 8595188140409  
HRN-41 / 400V: 8595188140423  
HRN-41 / 24V: 8595188140416  
HRN-42 / 110V: 8595188140478  
HRN-42 / 230V: 8595188140447  
HRN-42 / 400V: 8595188140461  
HRN-42 / 24V: 8595188140454


Technical parameters		HRN-41	HRN-42
Supply			
Supply terminals:	A1 - A2		
Voltage range:	AC 110 V, AC 230 V, AC 400 V or AC/DC 24 V (AC 50-60Hz)		
Burden max.:	2.5 W / 5 VA (AC 110 V, AC 230 V, AC 400 V), 1.4 W / 2 VA (AC/DC 24 V)		
Supply voltage tolerance:	-15 %; +10 %		
Measuring			
Ranges:*	AC/DC 10 - 50 V (AC 50 - 60 Hz)	AC/DC 32 - 160 V (AC 50 - 60 Hz)	AC/DC 100 - 500 V (AC 50 - 60 Hz)
Terminals:	C - B1	C - B2	C - B3
Input resistance:	212 kΩ	676 kΩ	2.12 MΩ
Max. permanent overload:	100 V	300 V	600 V
Peak overload <1ms:	250 V	700 V	1 kV
Time delay for Umax:	adjustable 0.1 -10 s		
Time delay for Umin:	adjustable 0.1 -10 s		
Accuracy			
Setting accuracy (mechanical):	5 %		
Repeat accuracy:	<1 %		
Dependence on temperature:	< 0.1 % / °C (°F)		
Tolerance of limit values:	5 %		
Hysteresis (from fault to normal):	selectable 5 % / 10 % from range		
Output			
Number of contacts:	2x changeover/ SPDT (AgNi / Silver Alloy)		
Current rating:	16 A / AC1		
Breaking capacity:	4000 VA / AC1, 384 W / DC		
Inrush current:	30 A / < 3 s		
Switching voltage:	250 V AC1 / 24 V DC		
Output indication:	yellow LED		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life (AC1):	0.7x10 <sup>5</sup>		
Other information			
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)		
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)		
Electrical strength:	4 kV (supply - output)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel / IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)		
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")		
Weight:	246 g (110V, 230 V, 400 V) (8.7 oz.), 146 g (24 V) (5.1 oz.)		
Standards:	EN 60255-6, EN 61010-1		

- Relay designed for monitoring DC and AC voltage in three ranges.
- The relay controls the size of the voltage in two independent levels (Umin, Umax).
- Setting the monitored level Umax (in % of range.)
- Setting the monitored level Umin (in % of range - for HRN-42 -function WINDOW, (in % of the set upper limit - for HRN-41 - function HYSTERESIS).
- Adjustable function "MEMORY".
- Function of second relay (independently / in parallel).
- Adjustable delay for eliminating short-term outages and surges for every level independently.
- Galvanically separated power supply from monitoring inputs.
- Output contact 2x switching 16 A / 250 V AC1 for each monitored voltage level.
- In 3-MODULE design, fixing to DIN rail.


Description

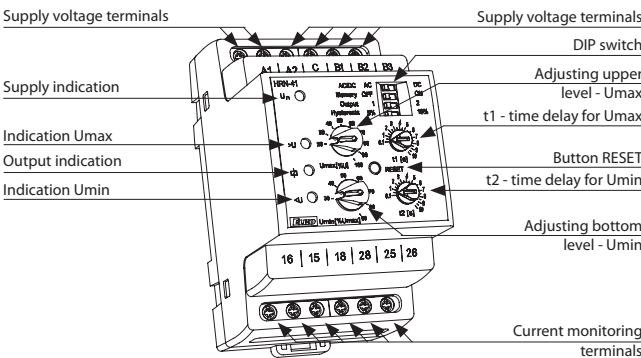


Description and importance of DIP switches

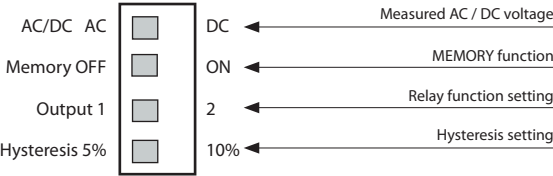

Connection




Symbol



\* Only one of the inputs can be connected.

## Function

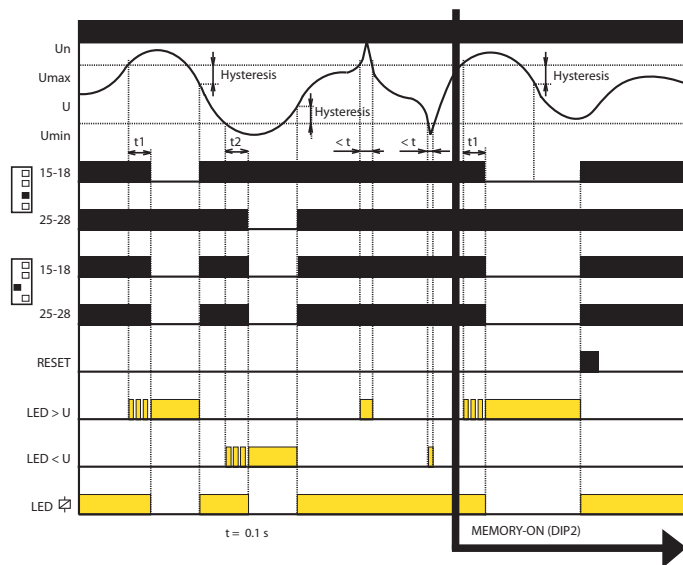

- if the value of the monitored voltage is in the zone between the set upper and lower levels, the status OK occurs - both relays are closed and the yellow LED illuminates. If the value of the monitored voltage is outside the set limits ( $> U_{max}$  or  $< U_{min}$ ), an error state occurs.
- when moving to an error state  $U > U_{max}$ , it times the delay  $t_1$  and a red  $LED > U$  simultaneously flashes. After the  $t_1$  time elapses, the red  $LED > U$  illuminates and the relevant relay opens.
- when moving to an error state  $U < U_{min}$ , it times the delay  $t_2$  and a red  $LED < U$  simultaneously flashes. After the time  $t_2$  elapses, the red  $LED < U$  illuminates and the relevant relay opens.
- when moving from the error status to the OK status, the relevant red LED immediately goes out, and the corresponding relay closes.

HRN-43, HRN-43N | Relay for complete monitoring 3-phase mains


EAN code  
HRN-43 / 110V: 8595188130387  
HRN-43 / 230V: 8594030337660  
HRN-43 / 400V: 8595188121316  
HRN-43 / 24V: 8594030338087  
HRN-43N / 110V: 8595188121323  
HRN-43N / 230V: 8594030338216  
HRN-43N / 400V: 8595188120258  
HRN-43N / 24V: 8594030338094




- monitoring of 3-phase mains:
  - voltage in 2 levels (undervoltage and overvoltage) in range 138-276 V (3x 400 V / 230 V) or 280-480 V (3x 400 V)
  - phase asymmetry (can be switched off)
  - phase sequence
  - phase failure
- adjustable function „MEMORY“
- function of second relay (independent / parallel)
- adjustable delay for short peaks for each level independently
- **HRN-43:** for circuits 3x 400 V (without neutral)
- **HRN-43N:** for circuits 3x 400 / 230 V (with neutral)
- galvanically separated supply voltage AC 400 V, AC 110 V, AC 230 V, AC/DC 24 V
- output contact: 2x changeover 16 A / 250 V AC1
- 3-MODULE, DIN rail mounting

Technical parameters		HRN-43	HRN-43N
Supply			
Supply terminals:	A1 - A2		
Supply voltage:	AC 110 V, AC 230 V, AC 400 V, AC/DC 24 V / (AC 50 - 60 Hz)		
Consumption max.:	2.5 W / 5 VA (AC 110 V, AC 230 V, AC 400 V), 1.4 W / 2 VA (AC/DC 24 V)		
Supply voltage tolerance:	-15 %; +10 %		
Measuring circuit			
Voltage set:	3x 400 V / 50 Hz	3x 400 V / 230 V / 50 Hz	
Monitored terminals:	L1, L2, L3	L1, L2, L3, N	
Upper voltage level:	240 - 480 V	138 - 276 V	
Bottom voltage level:	35 - 99 % Umax		
Max. permanent overload:	3x 480 V		
Hysteresis:	adjustable 5 % or 10 % of set value		
Asymmetry:	5 - 20 %		
Peak overload < 1 ms:	600 V < 1 ms	350 V < 1 ms	
Time delay t1:	fixed, max. 200 ms		
Time delay t2:	adjustable 0.1-10 s		
Accuracy			
Set. accuracy (mechanical):	5 %		
Repeat accuracy:	< 1 %		
Temperature dependance:	< 0.1 % / °C (°F)		
Limit values tolerance:	5 %		
Output			
Number of contacts:	2x changeover / SPDT (AgNi / Silver Alloy)		
Rated current:	16 A / AC1		
Switching capacity:	4000 VA / AC1, 384 W / DC		
Inrush current:	30 A / < 3 s		
Switching voltage:	250 V AC1 / 24 V DC		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life (AC1):	0.7x10 <sup>5</sup>		
Other information			
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)		
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)		
Electrical strength:	4 kV (supply - output)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel / IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)		
Dimensions:	90 x 52 x 65 mm (3.5 x 2 x 2.6")		
Weight:	246 g (110V, 230 V, 400 V) (8.7 oz.), 146 g (24 V) (5.1 oz.)		
Standards:	EN 60255-6, EN 61010-1		


Description

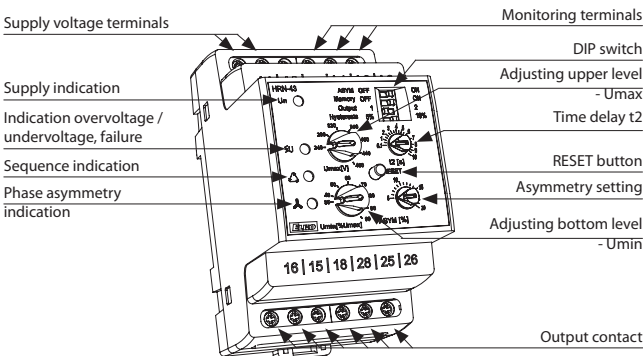


Description and importance of DIP switches

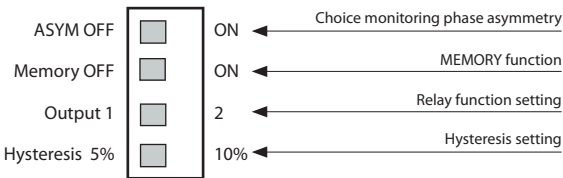

Connection

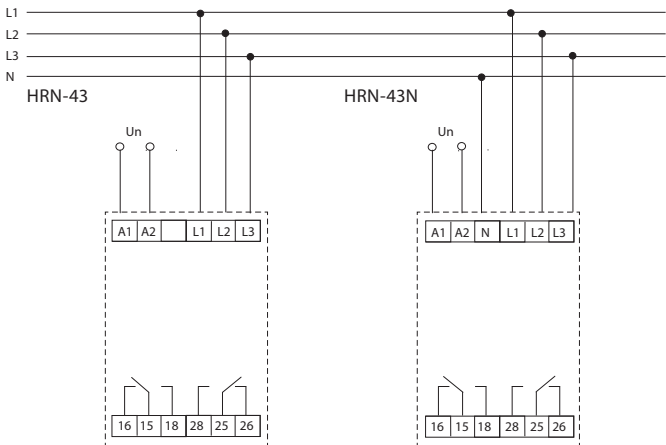


Symbol

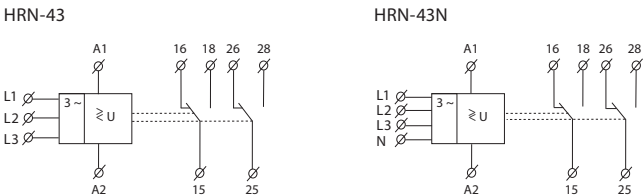



## Function

### Overvoltage - undervoltage

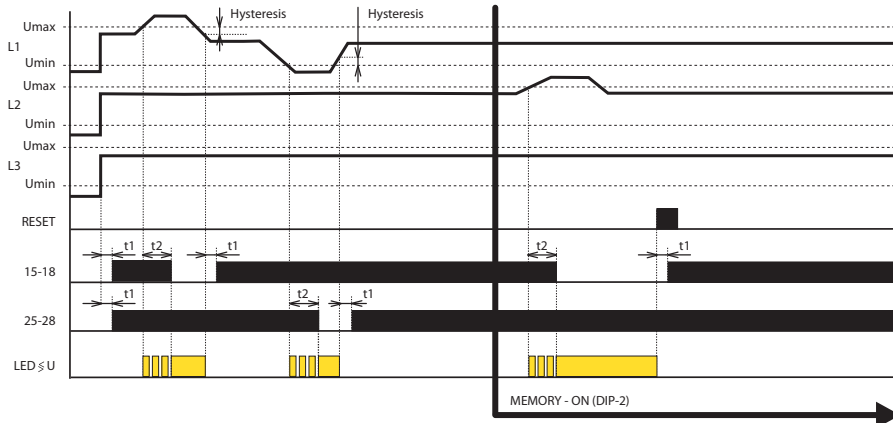

#### Legend:


L1, L2, L3 - 3-phase voltage  
RESET - press of the button on frontal panel  
t1 - time delay, fixed  
t2 - time delay, adjustable  
15-18 output relay 1  
25-28 output relay 2  
LED  $\leq U$  - indication overvoltage / undervoltage

#### Selection of 2<sup>nd</sup> the relay function:

In order to monitor 2 levels of voltage, it is possible to select if output relay will respond to each level individually (see the diagram "phase sequence") or both relays will switch in parallel way (see diagram "phase sequence").

Selection via DIP switch Output.

### Phase sequence

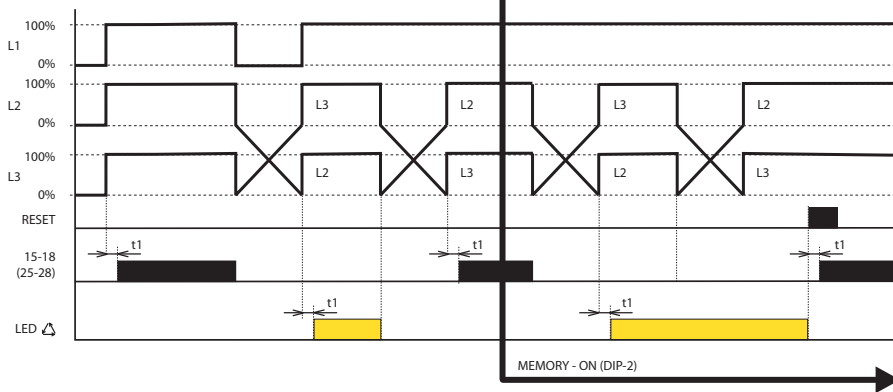


#### Legend:

L1, L2, L3 - 3-phase voltage  
RESET - press of the button on frontal panel  
t1 - time delay, fixed  
t2 - time delay, adjustable  
15-18 output relay 1  
25-28 output relay 2  
LED  $\Delta$  - indication of phase sequence

#### Selection of 2<sup>nd</sup> relay function:

The function is not implied in the monitoring phase sequence, the relays are switched in parallel way. DIP switch Output is ignored.

### Asymmetry - phase failure

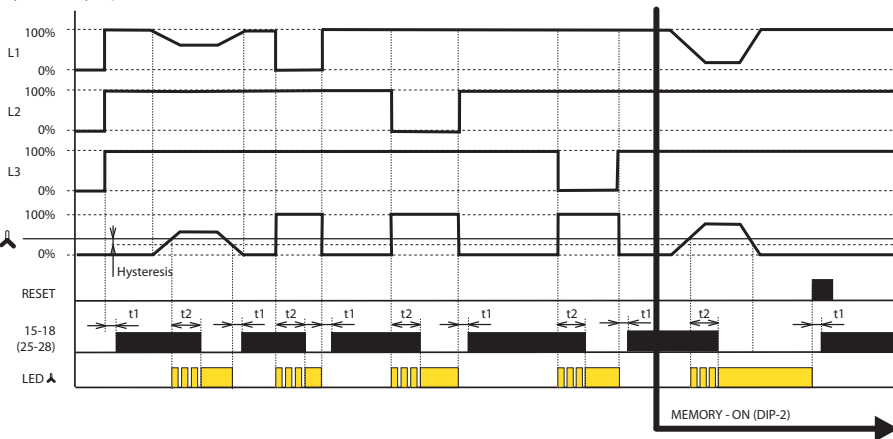

#### Legend:

L1, L2, L3 - 3-phase voltage  
RESET - press of the button on frontal panel  
t1 - time pause, fixed  
t2 - time pause, adjustable  
 $\Delta$  - adjustable asymmetry  
15-18 output contact of relay 1  
25-28 output contact of relay 2  
LED  $\Delta$  - asymmetry indicator

#### Selection of 2<sup>nd</sup> relay function:

The function is not implied in the monitoring phase sequence, the relays are switched in parallel way. DIP switch Output is ignored.

Relay is designated to monitor 3-phase circuits. Type HRN-43N controls voltage towards neutral wire, type HRN-43 controls interphase voltage. Relay can monitor voltage in two levels (overvoltage / undervoltage), phase asymmetry, sequence and failure. Each faulty state is indicated by individual LED. By DIP switch (Output) it is possible to define function of the other relay - independent function (1x for overvoltage, 1x for undervoltage) or in parallel. Time delays t1 (fixed) - when changing from faulty to normal state or when de-energized and t2 (adjustable) when changing from normal to faulty state. These delays prevent incorrect conduct and oscillation of output device during short voltage peaks in the main or during gradual voltage decline into normal.

#### Voltage control

Set upper level Umax in range 138 - 276 V (or 240 - 480 V for HRN-43) and lower level Umin in range 35-99 % Umax. In case any phase passes this range, after a delay which eliminated short voltage peaks, contact opens. Output contact again switches after returning back into monitored voltage range and exceeding fixed hysteresis (which is adjustable in two values by DIP switch). In case of failure of two or three phases, the relay is deactivated immediately regardless of the set delay t2.

#### Phase sequence

Monitors correctness of phase sequence. In case of unwanted change output contact breaks. In case of energization of a device with incorrect phase sequence, contact stays opened.

#### Asymmetry

Rate of asymmetry between individual phases is set in a range of 5-20 %. In case set asymmetry is exceeded, output relay breaks and LED indicating asymmetry shines. Delays t1, t2 and hysteric are applicable when returning to normal state. Monitoring asymmetry can be switched off by DIP switch ASYM.



EAN code  
HRN-54: 8595188137201  
HRN-54N: 8595188137218

Technical parameters	HRN-54	HRN-54N
Supply and measuring:	L1, L2, L3	L1, L2, L3, N
Supply terminals:	L1, L2, L3	L1, L2, L3, N
Supply / measured voltage:	3x 400 V / 50-60 Hz	3x 400 V / 230 V / 50-60 Hz
Level Umax:	105 - 125 % Un	
Level Umin:	75 - 95 % Un	
Burden:	max. 2 VA	
Hysteresis:	2%	
Max. permanent overload:	AC 3x 460 V	AC 3x 265 V
Peak overload <1ms:	AC 3x 500 V	AC 3x 288 V
Time delay T1:	max. 500 ms	
Time delay T2:	adjustable 0.1-10 s	

Output	
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Inrush current:	10 A
Switching voltage:	250 V AC1 / 24 V DC
Indication of state:	red LED
Mechanical life:	1x10 <sup>7</sup>
Electrical life (AC1):	1x10 <sup>5</sup>

Other information	
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4 / with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5 x 0.7 x 2.5")
Weight:	69 g (2.43 oz.)      67 g (2.36 oz.)
Standards:	EN 60255-6, EN 61010-1

### Function description


Relay in 3-phase main monitors size of phase voltage. It is possible to set two independent voltage levels and thus it is possible to set two independent voltage levels and monitor e.g. undervoltage and overvoltage independently. In normal state when voltage is within set levels, output relay is closed and red LED shines. In case voltage exceeds or falls below the set levels, output relay opens and red LED shines (LED indicates faulty state - flashes when timing).

In case supply voltage falls below 60 % Un ( $U_{OFF}$  lower level) relay immediately opens without delay and faulty state is indicated by red LED.


In case timing is in progress and faulty state is indicated, timing is immediately stopped.

- It serves to monitor voltage, phase failure and sequence in switchboards, protection of devices in 3-phase mains.
- It is possible to set upper and lower level of monitoring voltage.
- Adjustable time delay eliminates short voltage peaks and failures in the main.
- Supplied from monitored voltage.
- Faulty state is indicated by red LED and by opening of output relay contact.
- Output contact 1x changeover / SPDT 8 A / 250 V AC1.
- In case supply voltage falls below 60 %Un ( $U_{OFF}$  lower level) relay immediately opens without delay.
- **HRN-54:** supply from all phases which means that relay is functional also in case when one phase is faulty.
- **HRN-54N:** supply L1-N, means that relay monitors also failure of neutral wire.
- 1-MODULE, DIN rail mounting.

### Description

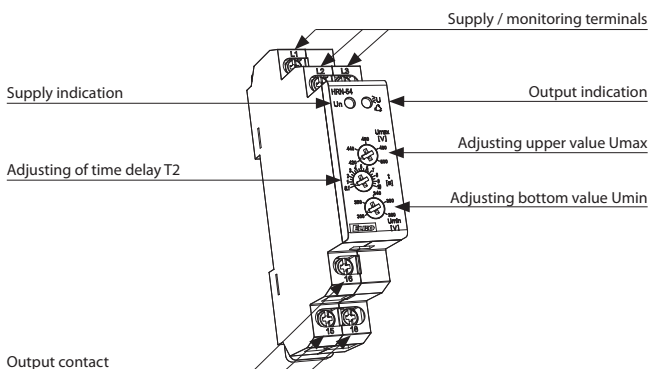


### Function

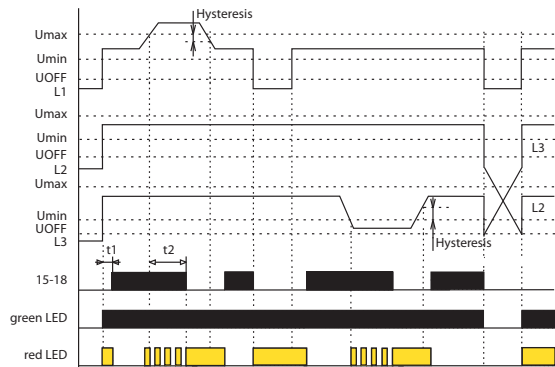

### Connection

### Symbol

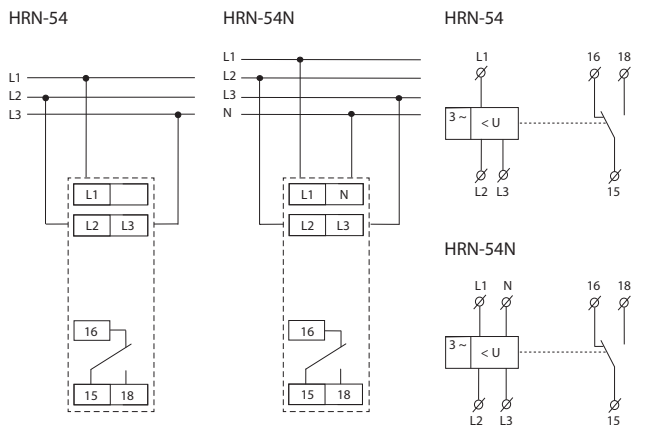



EAN code  
HRN-55: 8595188137225  
HRN-55N: 8595188137232

Technical parameters	HRN-55	HRN-55N
Monitoring terminals:	L1, L2, L3	L1, L2, L3, N
Supply terminals:	L1, L2, L3	L1, L2, L3, N
Voltage:	3x 400 V / 50-60 Hz	3x 400 V / 230 V / 50-60 Hz
Level Umax:	125 % Un	
Level Umin:	75 % Un	
Burden:	max. 2 VA	
Hysteresis:	2 %	
Max. permanent:	AC 3x 460 V	AC 3x 265 V
Peak overload <1ms:	AC 3x 500 V	AC 3x 288 V
Time delay T1:	max. 500 ms	
Time delay T2:	adjustable 0.1 - 10 s	

Output	
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Inrush current:	10 A
Switching voltage:	250 V AC1 / 24 V DC
Output indication:	red LED
Mechanical life:	1x10 <sup>7</sup>
Electrical life (AC1):	1x10 <sup>5</sup>

Other information	
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5 x 0.7 x 2.5")
Weight:	67 g (2.36 oz.)   66 g (2.3 oz.)
Standards:	EN 60255-6, EN 61010-1

### Function description


Relay in 3-phase main monitors correct phase sequence and failure of any phase. Green LED is permanently ON and indicates presence of power supply voltage. In case of phase failure or exceeding voltage level red LED flashes and relay breaks. When changing to faulty state, time delay applies. Time delay setting is set by a potentiometer on front panel of the device. In case of incorrect phase sequence red LED shines permanently and relay is open. In case supply voltage falls below 60 % Un (OFF lower level) relay immediately opens with no delay and faulty state is indicated by red LED.

**HRN-55** - thanks to supply form all phases, this relay is able to stay operational also if one phase is out.


**HRN-55N** -supply L1-N, means that relay monitor also failure in neutral wire.

- Relay monitors phase sequence and failure, exceeding of monitored voltage in 3 phase main.
- HRN-55**: supply from all phases, which means that function of relay is applicable also if one phase fails.
- HRN-55N**: supply L1-N, it means that relay also monitors break of neutral point.
- Fixed delay T1 (500 ms) and adjustable delay T2 (0.1 - 10 s).
- Faulty state is indicated by LED and output contact of relay is OFF.
- Output contact: 1x changeover / SPDT 16 A / 250 V AC1.
- 1-MODULE, DIN rail mounting.

### Description

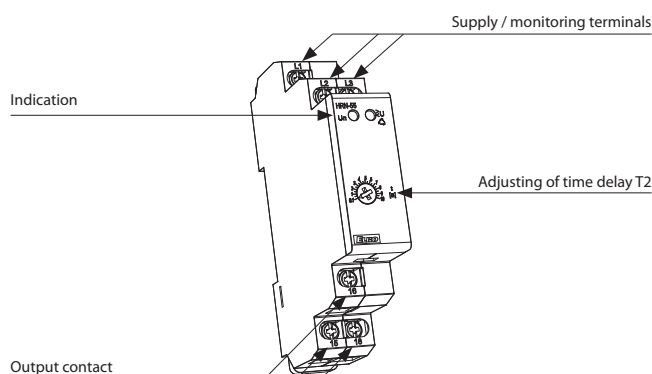


### Function

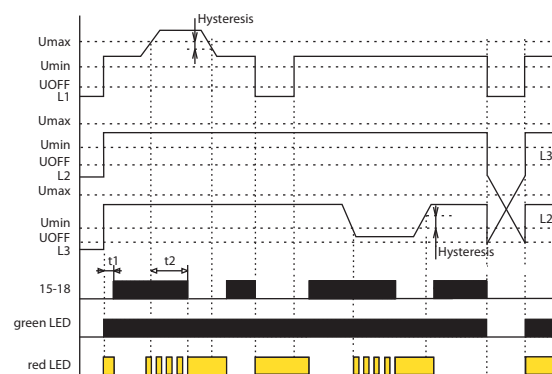

### Connection

### Symbol

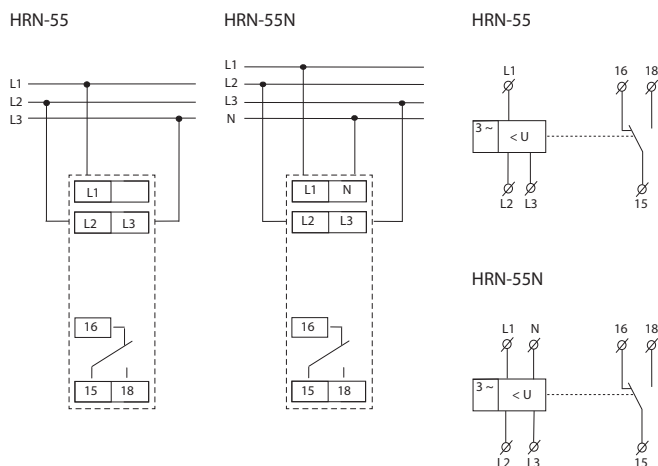

HRN-56 | Relay for monitoring phase sequence and failure

EAN code  
HRN-56 /120V: 8595188130745  
HRN-56 /208V: 8595188130134  
HRN-56 /240V: 8595188137119  
HRN-56 /400V: 8595188137126  
HRN-56 /480V: 8595188130189  
HRN-56 /575V: 8595188130196



- Relay monitors phase sequence and failure (e.g. control of correct motor winding etc.).
- Relay is designated for monitoring of 3-phase networks.
- Supply from all phases which means that relay is functional also in case of one phase failure.
- Supply and monitored supply Un:

1-MODUL

HRN-56/120 - 3x 120 V

HRN-56/208 - 3x 208 V

HRN-56/240 - 3x 240 V

HRN-56/400 - 3x 400 V

3-MODUL

HRN-56/480 - 3x 480 V

HRN-56/575 - 3x 575 V

Technical parameters			HRN-56			
	120	208	240	400	480	575
Monitoring terminals:	L1, L2, L3					
Supply terminals:	L1, L2, L3					
Supply / measured voltage:	3x120 V L-L (3x69.3V L-N) 50-60 Hz	3x 208 V L-L (3x120V L-N) 50-60 Hz	3x 240 V L-L (3x139V L-N) 50-60 Hz	3x 400 V L-L (3x230V L-N) 50-60 Hz	3x 480 V L-L (3x277V L-N) 50-60 Hz	3x 575 V L-L (3x332V L-N) 50-60 Hz
Level Umin:	adjustable 70 - 95 % Un					
Level Uoff:	60 % Un					
Burden:	max. 2 VA					
Hysteresis:	2 %					
Max. permanent overload:	AC 3x 160 V	AC 3x 276 V		AC 3x 460 V	AC 3x 550 V	AC 3x 660 V
Peak overload <1s:	AC 3x 180 V	AC 3x 300 V		AC 3x 500 V	AC 3x 600 V	AC 3x 700 V
Time delay T1:	max. 500 ms					
Time delay T2:	adjustable 0 -10 s					
Output						
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)					
Current rating:	8 A / AC1					
Breaking capacity:	2000 VA / AC1, 240 W/ DC					
Inrush current:	10 A					
Switching voltage:	250 V AC1 / 24 V DC					
Indication of state:	red LED					
Mechanical life:	1x10 <sup>7</sup>				3x10 <sup>7</sup>	
Electrical life (AC1):	1x10 <sup>5</sup>					
Other information						
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)					
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)					
Electrical strength:	4 kV (supply - output)					
Operating position:	any					
Mounting:	DIN rail EN 60715					
Protection degree:	IP40 from front panel / IP10 terminals				IP40 from front panel / IP20 terminals	
Overvoltage category:	III.					
Pollution degree:	2					
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4 / with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)				max.1x 2.5, max. 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5 x 0.7 x 2.5")				90 x 52 x 65 mm (3.5 x 2 x 2.6")	
Weight:	66 g (2.3 oz)	66 g (2.3 oz)	66 g (2.3 oz)	67 g (2.3 oz)	108 g (3.8 oz)	108 g (3.8 oz)
Standards:	EN 60255-6, EN 61010-1					

Function description

Relay in 3-phase main monitors correct phase sequence and phase failure. Green LED illuminates permanently and indicates energization. In case of phase failure red LED flashes and relay turns off. When changing to faulty state, time delay applies - delay setting is done by potentiometer on the front panel of the device. In case of incorrect phase sequence, red LED shines permanently and relay is open. In case supply voltage falls below 60% Un (Uoff lower level) relay immediately opens with no delay and faulty state is indicate by red LED.

HRN-56: Thanks to supply from all phases, relay is functional also in case of one phase failure.

Description

1-MODULE

3-MODULE




Supply terminal

Indication

Adjusting value Umin

Adjusting of time delay

Output contacts

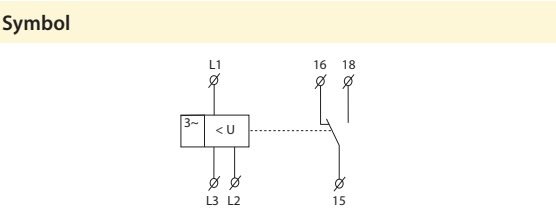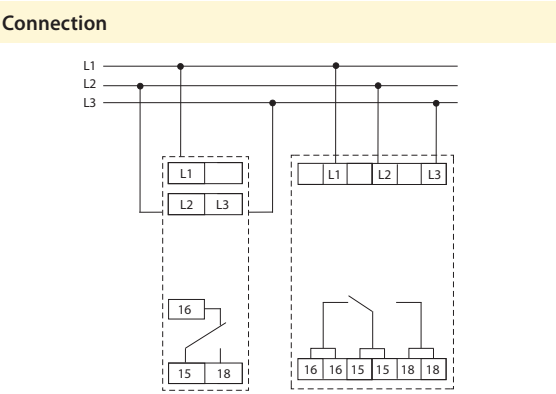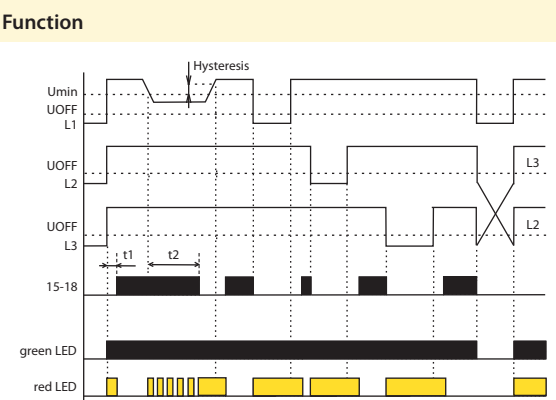



EAN code  
 HRN-57: 8595188137256  
 HRN-57N: 8595188137249

Technical parameters	HRN-57	HRN-57N
Monitoring terminals:	L1, L2, L3	L1, L2, L3, N
Supply terminals:	L1, L2, L3	L1, L2, L3, N
Voltage:	3x 400 V / 50-60 Hz	3x 400 V / 230 V / 50-60 Hz
Level Umax:	105 - 125 % Un	
Level Umin:	75 - 95 % Un	
Burden:	max. 2 VA	
Hysteresis:	2 %	
Max. permanent overload:	AC 3x 460 V	AC 3x 265 V
Peak overload <1ms:	AC 3x 500 V	AC 3x 288 V
Time delay T1:	max. 500 ms	
Time delay T2:	adjustable 0.1-10 s	

Output		
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	8 A / AC1	
Breaking capacity:	2000 VA / AC1, 240 W / DC	
Inrush current:	10 A	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	1x10 <sup>7</sup>	
Electrical life (AC1):	1x10 <sup>5</sup>	

Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4 / with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	68 g (2.4 oz.)	66 g (2.3 oz.)
Standards:	EN 60255-6, EN 61010-1	


### Function description

Relay in 3-phase main monitors size of phase voltage. It is possible to set two independent voltage levels and thus it is possible to set two independent voltage levels and monitor e.g. undervoltage and overvoltage independently. In normal state when voltage is within set levels, output relay is closed and red LED shines. In case supply voltage falls below 60 % Un (U<sub>OFF</sub> lower level) relay immediately breaks without delay and faulty state is indicated by red LED. In case voltage exceeds or falls below the set levels, output relay breaks and red LED shines (LED indicates faulty state - flashes when timing).


In case timing is in progress and faulty state is indicated, timing is immediately stopped.

- It serves to monitor voltage in a switchboard, protection of devices in 3-phase main.
- It monitors value of voltage in 3-phase main.
- It is possible to set upper and lower level independently.
- Adjustable time delay eliminated short voltage peaks and failures in the main.
- The device is supplied from monitored voltage.
- Faulty state is indicated by red LED and by breaking output relay contact.
- Output contact 1x changeover / SPDT 8 A / 250 V AC1.
- Relay doesn't monitor phase sequence.
- **HRN-57:** supply from all phases, means that relay is functional also in case of failure in one phase.
- **HRN-57N:** supply L1-N, means that relay monitors also failure of neutral wire.
- 1-MODULE, DIN rail mounting.

### Description

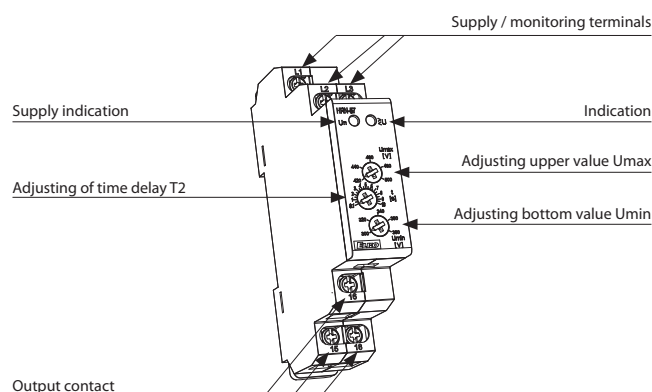


### Function

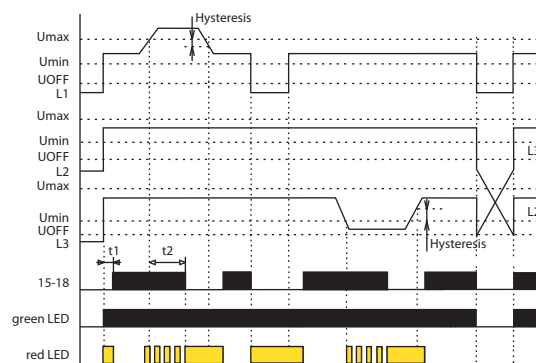

### Connection

### Symbol

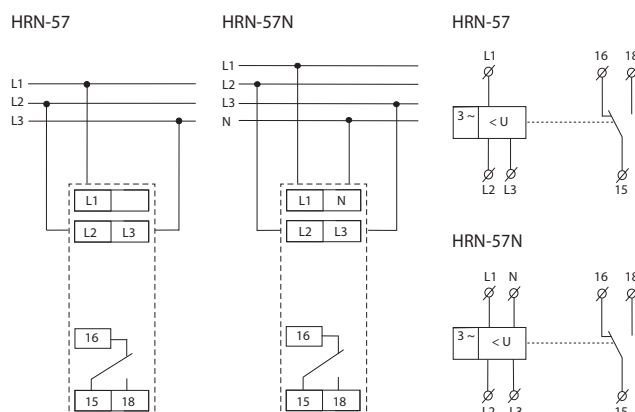

MPS-1 | Optical signaling of three-phase main




EAN code  
 MPS-1: 8595188145978


Technical parameters		MPS-1
Supply voltage:	AC 3x 400/230 V / 50 - 60 Hz	
Supply voltage tolerance:	+20 %, -75 %	
Power consumption:	max. 1.0 VA / 0.5 W	
Indication		
LED not illuminated:	0.. 50 V / 45.. 0 V	
LED illuminated		
- yellow:	50.. 207 V / 195.5.. 45 V	
- green:	207.. 264.5 V / 253.. 195.5 V	
- red:	264.5.. 276 V / 276.. 253 V	
Other information		
Design:	1 MODULE	
Mounting:	DIN rail EN60715	
Operating position:	any	
Coverage:	panel IP40, terminals IP10	
Overvoltage category:	III.	
Contamination level:	2	
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4 / with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Working temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Dimensions:	90 x 17.6 x 64 mm (3.5 x 0.7 x 2.5")	
Weight:	58 g (2 oz.)	
Standards:	EN60947-1, EN60947-5-1	

- Used for optical signaling of the voltage level in three phases.
- Each phase features LED signaling broken is divided by color into voltage levels:
  - voltage in tolerance of  $\pm 15\%$  - green
  - overvoltage - red
  - undervoltage - yellow
  - voltage < 50 V - LED not illuminated.
- Four-wire connection - L1, L2, L3, N.
- Monitors phase voltages against neutral wire.
- Not dependent upon order of phases.
- Four-wire connection - L1, L2, L3, N.
- In 1-MODULE design, DIN rail mounting.

Description of device

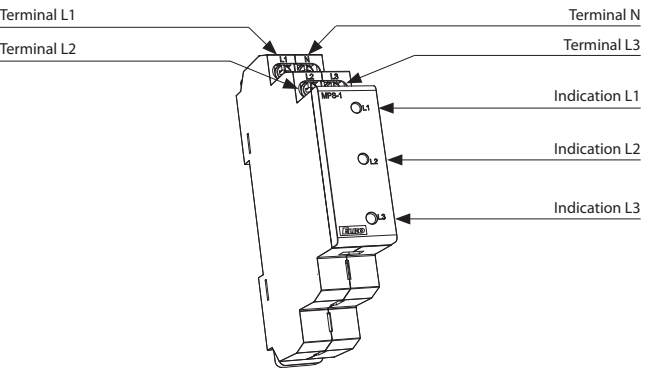


Function

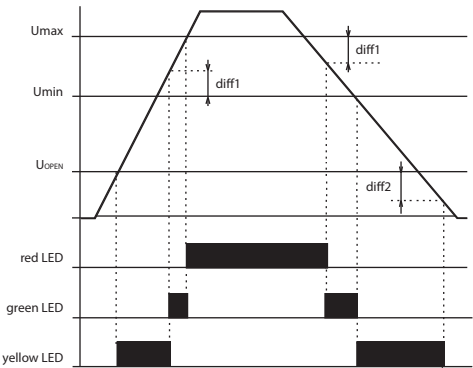

After connecting the supply voltage, the LED illuminates - the color corresponds to the voltage size of individual phases. If the phase voltage drops under 40 V (phase outage), the corresponding LED is not illuminated.

Connection

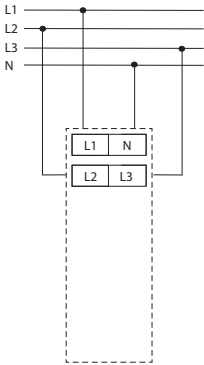






EAN code  
HRF-10: 8595188144827


Technical parameters	HRF-10
Supply and monitoring terminals:	L, N
Supply voltage:	161 - 346 V
Rated frequency Fn:	50 / 60 / 400 Hz
Burden (max):	1.7 VA / 1.1 W
Overload capacity	
- continuous:	346 V
- max.10 s:	416 V
Frequency Fmax:	adjustable 80 - 120 % Fn
Frequency Fmin:	adjustable 80 - 120 % Fn
Difference:	adjustable 0.5 - 5 % Fn
Delay (until failure):	adjustable 0.5 - 10 s
Opening level (Uopen):	161 V
Output relay - contact:	2x changeover / SPDT (AgNi) gilded
AC contact capacity:	250 V / 8 A, max. 2000 VA
DC contact capacity:	30 V / 8 A
Mechanical life:	3x10 <sup>6</sup> at rated load

Other information	
Operational temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strenght	
(supply - relay contact):	4 kV / 1 min.
Protection degree:	III.
Overvltage category:	2
Pollution degree:	IP40 from front panel / IP20 terminals
Profile of connecting wires (mm <sup>2</sup> ):	max. 2x 1.5 / 1x 2.5 (AWG 12)
Dimensions:	90 x 52 x 64 mm (3.5 x 2 x 2.6")
Weight:	125 g (4.4 oz.)
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4


## Connection




## Rated frequency setting



Fn setting = 50 Hz




Fn setting = 60 Hz




Fn setting = 400 Hz

- The relay serves to monitor frequency of AC voltage, e.g. in photovoltaic power stations, generators.
- The monitored frequency 50 / 60 / 400 Hz is selected by a switch.
- Supplied from monitored voltage.
- Two adjustable levels of frequency (Fmin, Fmax) in the range of 80 - 120 % Fn.
- Adjustable difference level.
- Adjustable delay level.
- Switchable ranges of rated frequency Fn.
- 3-MODULE design, DIN rail mounting.

## Device description

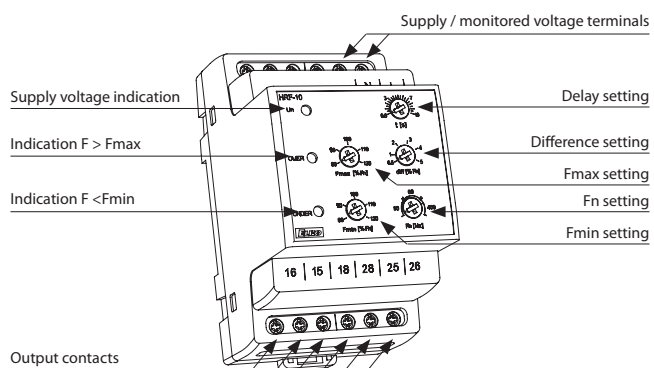

## Functions

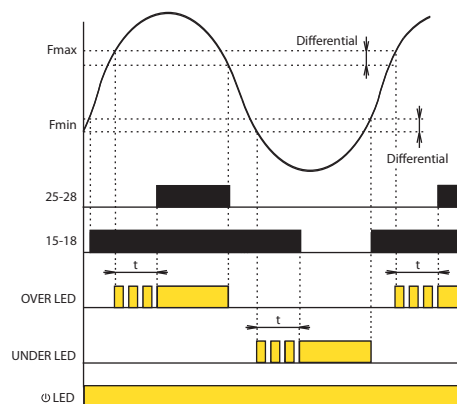

After the supply (monitored) voltage is connected, the green LED is on. If the value of the monitored frequency falls within the range between the two set levels Fmin - Fmax no red LED is on. The relay UNDER is triggered (contacts 15-16-18) and the relay OVER is disconnected (contacts 25-26-28).

If the monitored frequency exceeds the set level Fmax, the relay OVER is triggered after the set delay timing elapses and the red LED OVER goes on. The red LED flashes during the timing.

If the monitored frequency drops below Fmax - difference, the relay is activated without delay and the red LED OVER goes off.

If the monitored frequency drops below the set level Fmin, the relay UNDER is disconnected after the set delay timing elapses and the red LED UNDER goes on. The red LED flashes during the timing. If the monitored frequency exceeds the level Fmin + the difference, the relay is triggered without delay and the red LED UNDER goes off.

If the monitored voltage is lower than the opening level Uopen both the relays are disconnected and both the red LED (UNDER and OVER) start flashing slowly - indicating insufficient supply voltage.

INNOVATION



EAN code  
COS-2/230V: 8595188155434  
COS-2/110V: 8595188152280  
COS-2/400V: 8595188152365  
COS-2/24V: 8595188155441

- Relay monitors phase shift between current and voltage in 3-phase or 1-phase networks - evaluates COS φ (replacement COS-1)
- The relay is designed to monitor overload / relieve the motors
- Relay is designed for 3 x 400 / 230V circuits
- Galvanically isolated power supply AC 230V, AC 110V, AC 400V or AC / DC 24V
- Adjustable upper and lower level COS φ
- Possibility to extend the current range using a current transformer
- Adjustable MEMORY function
- Two output relays (for each level independent)
- Adjustable delay eliminating engine start-up
- Output contact 2x changeover 16A / 250V AC1
- 3-MODULE design, mounting onto DIN rail.

Technical parameters

COS-2

Supply

Supply terminals:	A1 - A2
Voltage range:	AC 230 V, AC 110 V, AC 400 V or AC/DC 24 V (AC / 50 - 60 Hz)
Burden max.:	2.5 W / 5 VA (AC 110 V, AC 230 V, AC 400 V), 1.4 W / 2 VA (AC/DC 24 V)
Operating range:	-15 %; +10 %

Measuring

Voltage set:	3x 400 V / 230 V / 50 - 60 Hz
Terminals:	L1, L2, L3, B1
Upper level cos-φ:	adjustable 0.1 - 0.99
Bottom level cos-φ:	adjustable 0.1 - 0.99
Max. permanent voltage:	(input L1, L2, L3) AC 3x 460 V
Current range:	0.1 - 16 A
Current overloading:	20 A (< 3 sec.)
Hysteresis:	adjustable 5 % or 10 %
Time delay t1:	adjustable 0.1 - 10 s
Time delay t2:	adjustable 0.1 - 10 s

Accuracy

Accuracy setting (mechanical):	5 %
Accuracy of repetition:	< 1 %
Temperature dependance:	< 0.1 % / °C (°F)
Limit values tolerance:	5 %


Output

Number of contacts:	2x changeover/ SPDT (AgNi / Silver Alloy)
Current rating:	16 A / AC1
Breaking capacity:	4000 VA / AC1, 384 W / DC
Inrush current:	20 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC
Output indication:	yellow LED
Mechanical life:	3x10 <sup>7</sup>
Electrical life (AC1):	0.7x10 <sup>5</sup>


Other information

Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP20 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	max. 1x 2.5, max. 2x1.5 / with sleeve max. 1x 1.5 (AWG 12)
Dimensions:	90 x 52 x 65 mm (3.5 x 2 x 2.6")
Weight:	8.7 oz (246 g) (230 V, 110 V, 400 V); 5.1 oz (145 g) (24 V)
Standards:	EN 60255-6, EN 61010-1


Description

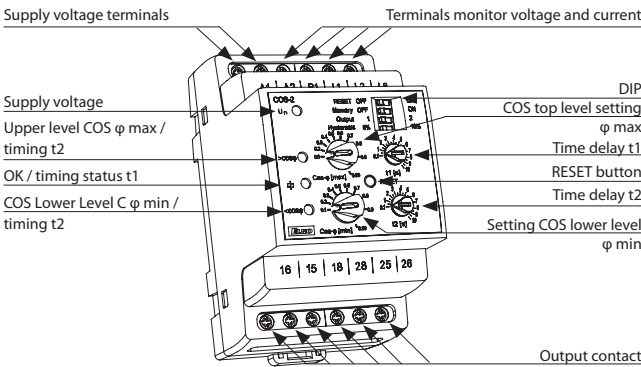


Description and importance of DIP switches

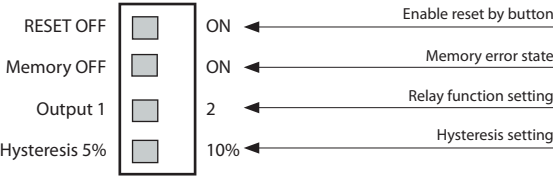

Connection

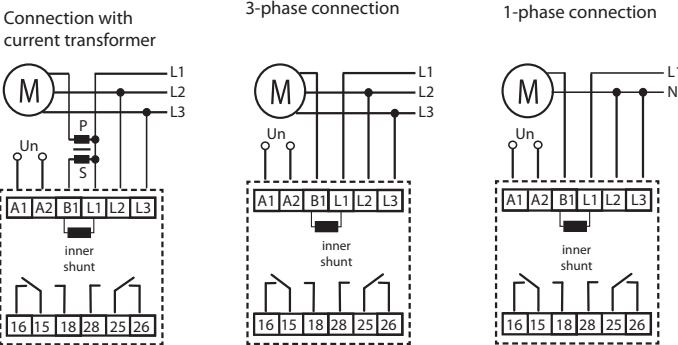


Symbol




## Function

Status after switching on power, two relay mode

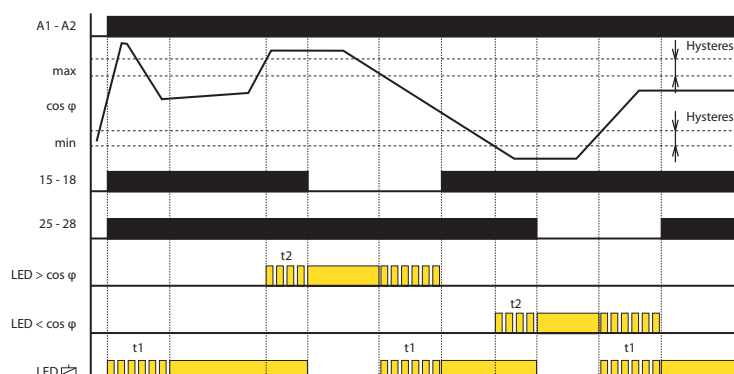

Memory on, two relay mode

decrease (loss) of current

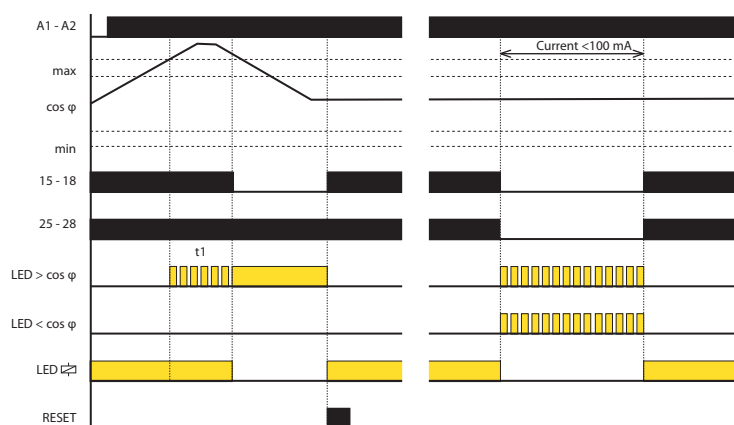

After powering on, the device sets the delay time  $t_1$  and yellow LED flashes. Both relays are switched on. The delay serves to eliminate a faulty state when starting the motor. After the time delay  $t_1$  begins monitoring  $\cos \varphi$  only.

If the  $\cos \varphi$  is in the band between the upper and lower limits set, both relays are switched on and the yellow LED is on.

If the  $\cos \varphi$  is outside the set limits ( $> \cos \varphi_{\max}$  or  $< \cos \varphi_{\min}$ ), an error condition occurs - the time  $t_2$  is delayed while the red LED corresponding to the  $\cos \varphi$  blinks at the same time. After the time delay  $t_2$  red LED lights and the corresponding relay remains off.

When the  $\cos \varphi$  returns to set limits, the time  $t_1$  is delayed and the yellow LED flashes at the same time as the corresponding red LED. After the time delay stops blinking yellow LED, the corresponding red LED turns off and the relay switches on.

At low wattage ( $< 100\text{mA}$ ) or with a power failure, an error is reported by the simultaneous blinking of both red LEDs. After resuming the voltage or the current being watched, the relay returns to the normal state where the  $\cos \varphi$  value is monitored.

When the memory is turned off (DIP switch 2 OFF) and the allowable reset (DIP switch 1 ON), the pressing state is reached after the power is turned on, i.e. flashing yellow LED, both relays are switched on, with time delay  $t_1$ .

When the memory (DIP switch 2 ON) is in an error state (high or low value for  $\cos \varphi$ ) it should be reset (by pressing the RESET button).




EAN code  
PRI-32: 8595188121965


Technical parameters	PRI-32
<b>Supply circuit</b>	
Supply terminals:	A1 - A2
Voltage range:	AC 24 - 240 V, DC 24 V (AC 50 - 60 Hz)
Burden:	max. 1.5 VA
Operating range:	-15 %; +10 %
<b>Measuring circuit</b>	
Current range:	1 - 20 A (AC 50 Hz)
Current adjustment:	potentiometer
<b>Accuracy</b>	
Setting accuracy (mech.):	5 %
Repeat accuracy:	< 1 %
Temperature dependancy:	< 0.1 % / °C (°F)
Limit values tolerance:	5 %
Overload capacity:	max. 100 A / 10 s
<b>Output</b>	
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Output indication:	red LED
<b>Other information</b>	
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	68 g (2.4 oz.)
Standards:	EN 60255-6, EN 61010-1

- Current transformer is a part of the product. Inside this transformer there is a wire which senses the volume of flowing current.
- This construction reduces thermal stress of product when compared with conventional solutions with inbuilt shunt, and increases current range up to 20 Amps, and galvanically separates monitored circuit.
- For heating bars in sliding rails, heating cables, indication of current flow, controlling of 1-phase motor consumption...
- Universal supply AC 24 - 240 V and DC 24 V.
- Supply is galvanically separated from measuring current.
- Current exceeding - current flowing through monitored wire must not exceed 100 A.
- Output contact: 1x changeover / SPDT 8 A.
- Clamp terminals.
- 1-phase, 1-MODULE, DIN rail mounting.

Description

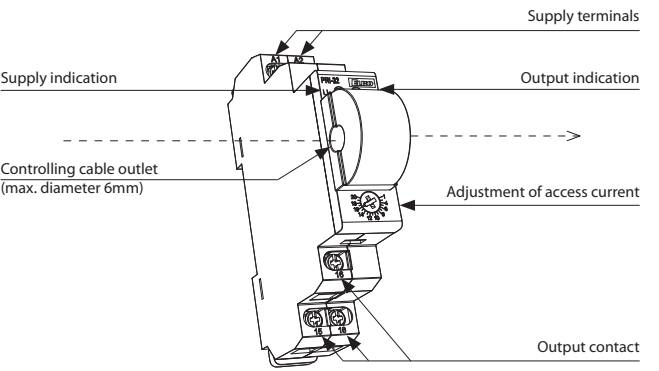

Function




Monitoring relay PRI-32 serves to monitor current level in single phase AC circuits. Due to its fluent adjustment of release current, it is predestined for applications with necessity of current flow indication, and can be used as precedence relay. Output relay is off in normal state. In case the set current level is exceeded, it switches. Multivoltage supply is an advantage.

Connection



Symbol





EAN code  
 PRI-51 /0.5A: 8595188142885  
 PRI-51 /1A: 8595188124904  
 PRI-51 /2A: 8595188124911  
 PRI-51 /5A: 8595188124928  
 PRI-51 /8A: 8595188124935  
 PRI-51 /16A: 8595188124942

## Technical parameters PRI-51

### Supply circuit

Supply terminals:	A1 - A2
Voltage range:	AC 24 - 240 V and DC 24 V (AC 50 - 60 Hz)
Burden:	max. 1.6 W
Supply voltage tolerance:	-15 %; +10 %

### Measuring circuit

Load:	between B1 - B2	
Current range:	PRI-51/0.5: AC 0.05-0.5A	PRI-51/8: AC 0.8-8A
	PRI-51/1: AC 0.1-1A	PRI-51/10: AC 1-10A
	PRI-51/2: AC 0.2-2A	PRI-51/16: AC 1.6-16A
	PRI-51/5*: AC 0.5-5A	(AC 50 Hz)

Max. permanent current:	PRI-51/0.5: 2 A
	PRI-51/1: 4 A
	PRI-51/2: 8 A
	PRI-51/5, PRI-51/8, PRI-51/10, PRI-51/16: 17 A

Inrush overload <1ms:	100 A
Current adjustment:	potentiometer
Time delay:	adjustable 0.5 - 10 s

### Accuracy

Setting accuracy (mechanical):	5 %
Repeat accuracy:	< 1 %
Temperature dependancy:	< 0.1 % / °C (°F)
Limit values tolerance:	5 % (10 % for 0.05 - 0.5 A range)
Hysteresis (fault to OK):	5 %

### Output

Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Output indication:	green / red LED


### Other information

Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	72 g (2.54 oz.)
Standards:	EN 60255-6, EN 61010-1


\* applicable also for current transformer

- It serves for monitoring of heating in rail-switches, heating cables, consumption of one-phase motors, indicates current flow
- Flexible adjustment by potentiometer, choice of 7 ranges: AC 0.05 - 0.5 A; AC 0.1 - 1 A; AC 0.2 - 2 A; AC 0.5 - 5 A; AC 0.8 - 8 A; AC 1 - 10 A; AC 1.6 - 16 A
- Adjustable delay 0.5 - 10 s to eliminate short current peaks
- It is possible to use for current scanning from current transformer - up to 600 A!
- Universal supply AC 24 - 240 V and DC 24 V
- Supply is galvanically separated from measured current, it must be in the same phase
- Output contact: 1x changeover / SPDT 8 A
- 1-phase, 1-MODULE, DIN rail mounting

## Description

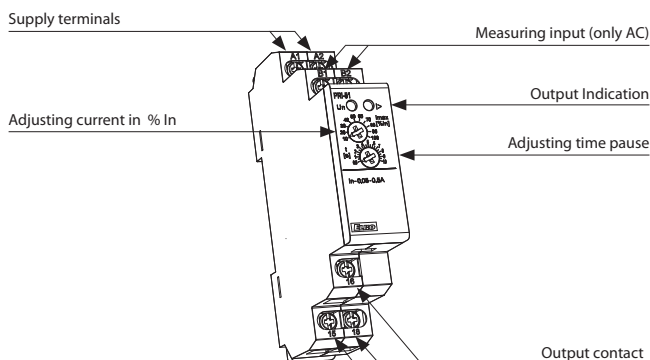


## Function

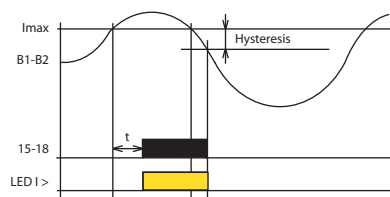


Monitoring relay PRI-51 serves to monitor current level in one-phase AC circuits. Gradual setting of actuating current of monitoring relay enables many different applications. Output relay is in normal state opened. After the set current level is reached, relay closes after the set delay (0.5 - 10s). When returning from faulty to normal state there is a hysteresis (5 %). Multi-voltage of this relay is an advantage. It is possible to monitor load which doesn't have the same supply as monitoring relay PRI-51.

Range of PRI-51 can be increased by an external current transformer.


## Connection

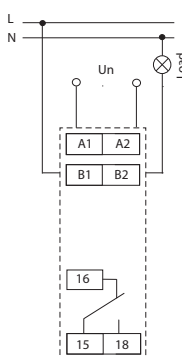

**Example Connection:**  
 PRI-51 with current transformer for current range increase.



## Symbol



## Example of an order

Always specify all reference name of current relay according to required range, for example PRI-51/5.

EAN code  
PRI-41/110V: 8595188140508  
PRI-41/230V: 8595188140485  
PRI-41/400V: 8595188147446  
PRI-41/24V: 8595188140492  
PRI-42/110V: 8595188140539  
PRI-42/230V: 8595188140515  
PRI-42/400V: 8595188147484  
PRI-42/24V: 8595188140522




Technical parameters		PRI-41	PRI-42
Supply circuit			
Supply terminals:	A1 - A2		
Voltage range:	AC 110 V, AC 230 V, AC 400 V or AC / DC 24 V (AC 50 - 60 Hz)		
Burden max.:	2.5 W / 5 VA (AC 110 V, AC 230 V, AC 400 V), 1.4 W / 2 VA (AC/DC 24 V)		
Operating range:	-15 %; +10 %		
Measuring circuit			
Ranges:*	AC/DC 3.2 - 16 A (AC 50 - 60 Hz)	AC/DC 1 - 5 A (AC 50 - 60 Hz)	AC/DC 0.32 - 1.6 A (AC 50 - 60 Hz)
Terminals:	C - B1	C - B2	C - B3
Input resistance:	2.3 mΩ	11 mΩ	23 mΩ
Max. permanent current:	16 A	8 A	3 A
Inrush overload <1ms:	20 A	16 A	6 A
Time delay for Imax:	adjustable 0.1-10 s		
Time delay for Imin:	adjustable 0.1-10 s		
Accuracy			
Measuring accuracy:	5 %		
Repeat accuracy:	< 1 %		
Temperature dependancy:	< 0.1 % / °C		
Limit values tolerance:	5 %		
Hysteresis (fault to OK):	selectable 5 % / 10 % from range		
Output			
Number of contacts:	2x changeover / SPDT (AgNi / Silver Alloy)		
Current rating:	16 A / AC1		
Breaking capacity:	4000 VA / AC1, 384 W / DC		
Inrush current:	30 A / < 3 s		
Switching voltage:	250 V AC1 / 24 V DC		
Output indication:	yellow LED		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life (AC1):	0.7x10 <sup>5</sup>		
Other information			
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)		
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)		
Electrical strength:	4 kV (supply - output)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel / IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)		
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")		
Weight:	250 g (8.8 oz.) (110V, 230 V, 400 V); 153 g (5.4 oz.) (24 V)		
Standards:	EN 60255-6, EN 61010-1		


\* Only one of the inputs can be connected.

- used to monitor overloading / relief (machine, motor, etc.), check consumption, diagnostics on a remote device (burning, short circuit, increased current draw, etc.)
- relay designed for monitoring DC and AC currents in three ranges
- the relay controls the current size in two independent levels (Imax, Imin)
- setting the monitored level Imax (in % of range)
- setting the monitored level Imin (in % of range - for PRI-42 - function WINDOW) (in % of the set upper limit - for PRI-41 - function HYSTERESIS)
- adjustable function "MEMORY"
- function of second relay (independently / in parallel)
- adjustable delay for eliminating short-term outages and surges for every level independently
- galvanically separated power supply from monitoring inputs
- output contact: 2x changeover 16 A / 250 V AC1 for each current level
- 3-MODULE, DIN rail mounting


Description

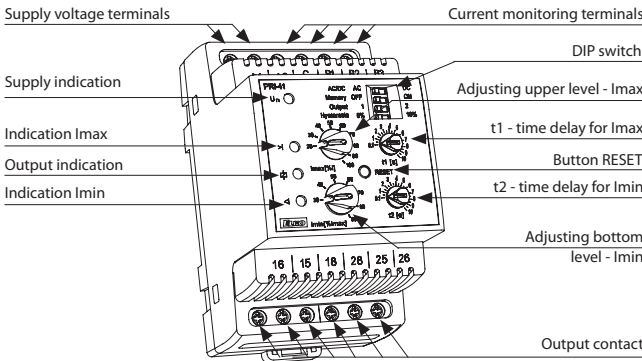


Description and importance of DIP switches

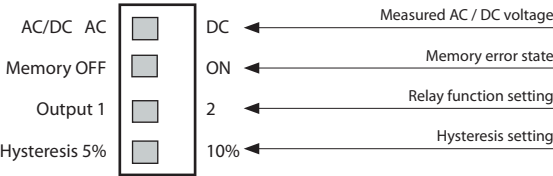

Connection




Symbol





Function

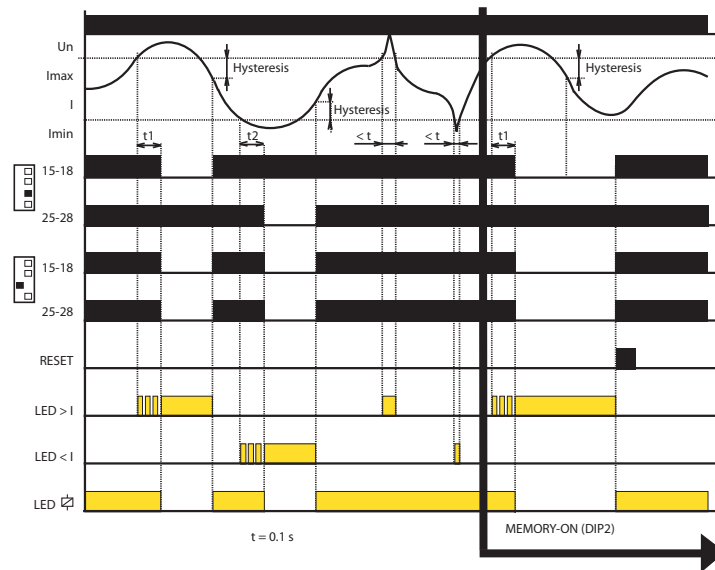

- if the value of the monitored current is in the zone between the set upper and lower levels, the status OK occurs - both relays are closed and the yellow LED illuminates. If the value of the monitored current is outside the set limits ( $I > I_{max}$  or  $I < I_{min}$ ), an error state occurs.
- when moving to an error state  $I > I_{max}$ , it times the delay  $t_1$  and a red LED  $> I$  simultaneously flashes. After the  $t_1$  time elapses, the red LED  $> I$  illuminates and the relevant relay opens.
- when moving to an error state  $I < I_{min}$ , it times the delay  $t_2$  and a red LED  $< I$  simultaneously flashes. After the time  $t_2$  elapses, the red LED  $< I$  illuminates and the relevant relay opens.
- when moving from the error status to the OK status, the relevant red LED immediately goes out, and the corresponding relay closes.




EAN code  
PRI-52: 8595188136556


Technical parameters		PRI-52
Supply		
Supply terminals:	A1 - A2	
Voltage range:	AC 24 - 240 V and DC 24 V (AC 50 - 60 Hz)	
Tolerance of voltage range:	-15 %; +10 %	
Burden:	max. 1.6 W	
Measuring circuit		
Current range:	AC 0.5 ... 25 A / 50 Hz	
Maximal permanent current:	25 A	
Inrush overload <1s:	100 A	
Current adjustment:	potentiometer	
Time delay:	adjustable 0.5 ... 10 s	
Accuracy		
Setting accuracy (mech.):	10 %	
Repeat accuracy:	< 1 %	
Temperature dependance:	< 0.2 % / °C	
Limit values tolerance:	10 %	
Hysteresis:	0.25 A	
Output		
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	8 A / AC1	
Switching power:	2000 VA / AC1, 240 W / DC	
Output indication:	red LED	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F )	
Storing temperature:	-30°C to 70 °C (-22 °F to 158°F )	
Electrical strenght:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution level:	2	
Max. cable size (mm²):	max. 2x 2.5, max. 1x 4 / with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	64 g (2.26 oz.)	
Standards:	EN 60255-6, EN 61010-1	

- Relay is designated for:
  - distant device diagnostic (short circuit, take-off increasing)
  - preferred (priority) relay - two appliances (boiler and floor heating) operating on one phase, but never run together - prevention against current overload and circuit breaker tripping. Enables to save your main breaker expenses.
  - current tranzit indicator - informs about heating activation, ceramic hob, ventilator...
  - changing over of appliances according to inverter's (converter) output by photocell applications.
- NEW - hole for threaded conductor passes through the body of device.
- Part of device is current transformer, which monitors size of current in threaded conductor.
- Possible to use also for sensing of current up to 600 A from external current transformer.
- Slight setting (by potentiometer) of tripping current - range AC 0.5 - 25 A.
- Slight setting (by potentiometer) of delay – adjustable in range 0.5 - 10s.
- Supply voltage AC 24 - 240 V and DC 24 V (AC 50 - 60 Hz).
- Output contact 1x changeover / SPDT 8 A (AC1).
- 1-phase version, 1-MODULE, DIN rail mounting, clamp terminals.

Description

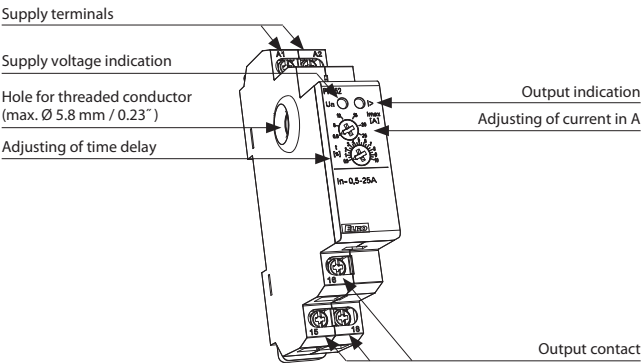


Functions

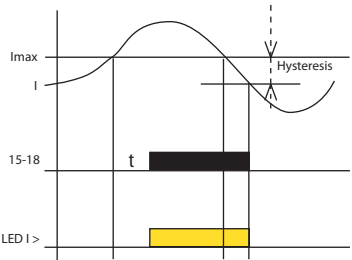


Monitoring relay PRI-52 serves for monitoring of current level in 1-phase AC circuits. Slight setting of release current level designates this relay for many various applications. Output relay is in normal status switched off. When set current level is overrun, relay get closed after preset delay. By return from error to normal status is used hysteresis. PRI-52 range is possible to increase with external current transformer. Advantage of PRI-52 is that the hole for threaded conductor is located under the level of covering in the switchboard - thanks that, threaded conductor is not accessible for unwanted manipulation.


Symbol



Connection

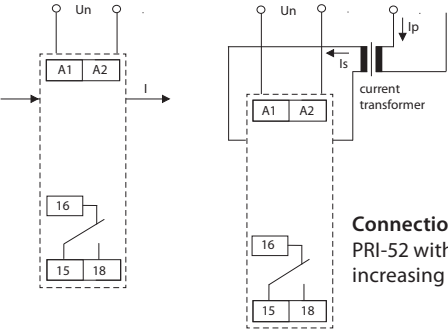


Connection example:  
PRI-52 with current transformer for increasing of current range.

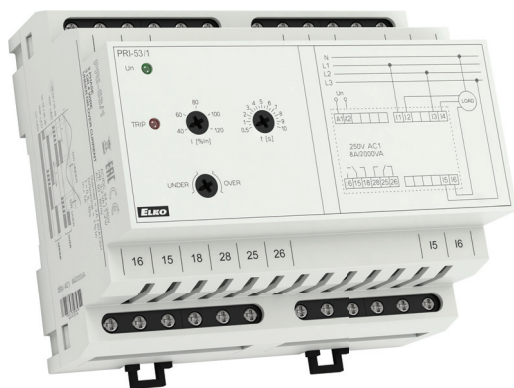

EAN code  
PRI-53/1: 8595188142137  
PRI-53/5: 8595188142144

Technical parameters		PRI-53/1	PRI-53/5
Supply terminals:	A1, A2		
Current monitoring terminals			
1st phase:	I1, I2		
2nd phase:	I3, I4		
3rd phase:	I5, I6		
Supply voltage:	24 - 240 V AC/DC		
Tolerance of voltage range:	± 10 %		
Operating AC frequency:	45 - 65 Hz		
Burden: (max):	3 VA / 1.2 W		
Rated current In:	AC 1 A	AC 5 A	
Current level - I:	adjustable 40 - 120 % In		
Overload capacity			
- continuous:	2 A	10 A	
- max. 3s:	20 A	50 A	
Difference:	fix 1 % In		
Delay (until failure):	adjustable 0.5 - 10s		
Output relay - contact:	2x changeover / SPDT (AgNi) gilded		
AC contact capacity:	250 V / 8 A, max. 2000 VA		
DC contact capacity:	30 V / 8 A		
Mechanical life:	3x10 <sup>6</sup> at rated load		
Other information			
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)		
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)		
Electrical strength			
(power supply - relay contact):	4 kV / 1 min.		
Overvoltage category:	III.		
Pollution level:	2		
Protection degree:	IP40 from front panel / IP20 terminal		
Max. cable size (mm²):	max. 2x 1.5 / 1x 2.5 (AWG 12)		
Dimensions:	90 x 105 x 64 mm (3.5 x 4.1 x 2.5")		
Weight:	208 g (7.3 oz.)		
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		


## Connection

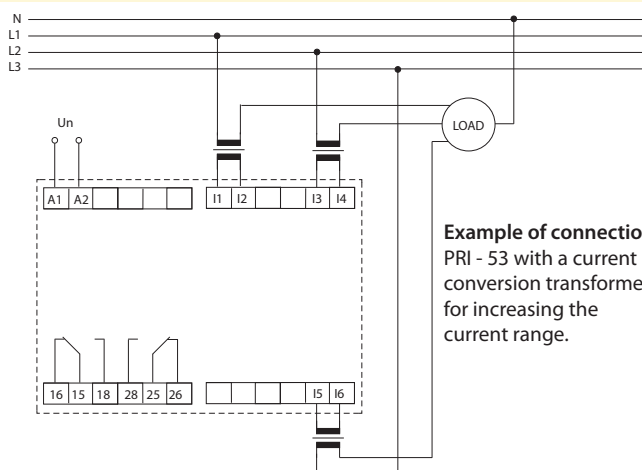


**Example of connection:**  
PRI - 53 with a current conversion transformer for increasing the current range.

- It is intended for monitoring the current in three-phase devices (e.g. cranes, motors, etc.).
- 24 - 240 V AC/DC power supply galvanically separated from the circuit of the monitored current.
- Adjustable current level in % of In.
- Fixed difference level.
- Adjustable delay level (when exceeding the preset limit).
- Adjustable function:
  - UNDER - monitors the drop in the strength of current below the preset value (I).
  - OVER - exceeding the preset value (I).
- 2 types depending on the strength of rated current In (1 A, 5 A).
- 6-MODULE, DIN rail mounting.
- Output relay with 2 changeover contacts.
- Option of connecting via the current transformers to increase the value of the monitored current by up to 600 A.

## Description

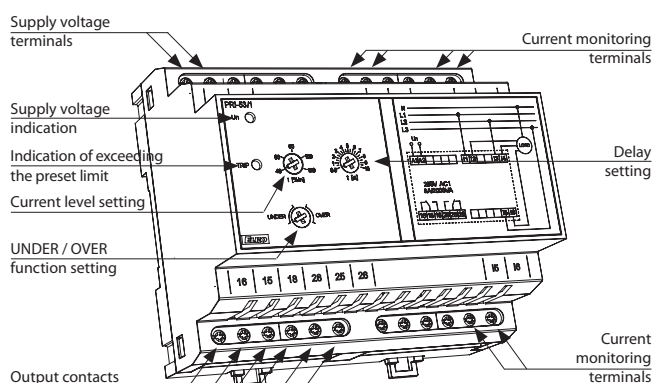

## Functions

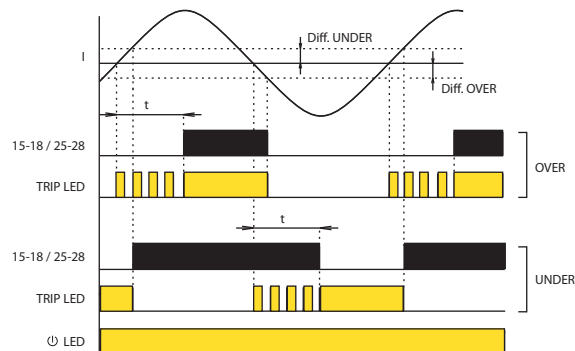

After the supply voltage is connected the green LED is on.

### UNDER function:

If the strength of the monitored current in all phases exceeds the preset level I, the relay is triggered and the red LED is off. If the strength of the monitored current drops in any phase below the level I, the relay is disconnected after the preset delay timing elapses and the red LED goes on. The red LED flashes during the delay.

If the strength of the monitored current returns above the level I + difference, the relay is triggered without delay and the red LED goes off.

### OVER function:

If the strength of the monitored current is lower in all phases than the preset level I, the relay is disconnected and the red LED is off.

If the strength of the monitored current exceeds in any phase the level I, the relay is triggered after the preset delay timing elapses and the red LED goes on. The red LED flashes during the delay.

If the strength of the monitored current again drops below the level I - difference, the relay is disconnected without delay and the red LED goes off.




EAN code  
HRH-5: 8595188136396

Technical parameters		HRH-5
Functions:	2	
Supply terminals:	A1 - A2	
Voltage range:	24.. 240 V AC / DC (AC 50 - 60 Hz)	
Input:	max. 2 VA	
Toleration of voltage range:	-15 %; +10 %	
Measuring circuit		
Sensitivity (input resistance):	adjustable in range 5 kΩ - 100 kΩ	
Voltage n electrodes:	max. AC 3.5 V	
Current in probes:	AC < 0.1 mA	
Time response:	max. 400 ms	
Max. capacity of probe cable:	800 nF (sensitivity 5kΩ), 100 nF (sensitivity 100 kΩ)	
Time delay (t):	adjustable, 0.5 -10 sec	
Time delay after switching on (t1):	1.5 sec	
Accuracy		
Accuracy in setting (mech.):	± 5 %	
Output		
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	8 A / AC1	
Switching voltage:	2000 VA / AC1, 240 W / DC	
Switched voltage:	250 V AC1 / 24 V DC	
Mechanical life (AC1):	1x10 <sup>7</sup>	
Electrical life:	1x10 <sup>5</sup>	
Other information		
Operational temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strenght:	2.5 kV (supply - sensors)	
Operational position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from font panel / IP10 terminals	
Overvltage category:	II.	
Pollution degree:	2	
Profile of connecting wires (mm²):	max. 2x 2.5, max. 1x 4 / with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	72 g (2.5 oz.)	
Standards:	EN 60255-6, EN 61010-1	
Recommended measuring probes:	see pg. 100	

- Relay is designed for monitoring levels in wells, basins, reservoirs, tanks...
- In one device you can choose the following configurations:
  - one-level switch of conductive liquids (by connecting H and D)
  - two-level switch of conductive liquids.
- One-state device monitors one level, two-state device monitors two levels (switches on one level and switches off on another level).
- Choice of function PUMP UP, PUMP DOWN.
- Adjustable time delay on the output (0.5 - 10s).
- Sensitivity adjustable by a potentiometer (5 - 100 kΩ).
- Measuring frequency 10 Hz prevents polarization of liquid and raising oxidation of measuring probes.
- Galvanically separated supply voltage UNI 24.. 240 V AC/DC.
- Output contact 1x changeover/SPDT 8A/250V AC1.
- 1-MODULE, mounting onto DIN rail.


Device description

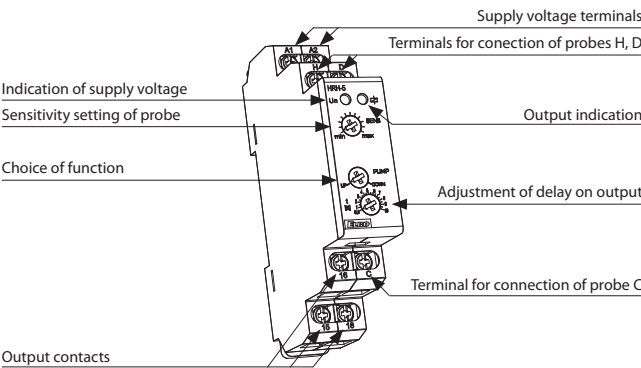

Function

Function PUMP UP

Function PUMP DOWN

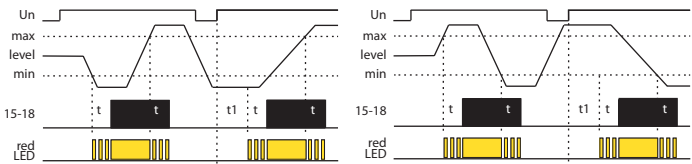


Relay is designated for monitoring of levels of conductive liquids with possibility of functions: PUMP UP or PUMP DOWN. To prevent polarization and liquid electrolysis of liquid, and undesirable oxidation of measuring probes, alternating current is used. For measuring use three measuring probes: H- upper level, D- lower level, C - common probe. In case you use a tank made of a conductive material, you can use it as probe C. In case you require monitoring of one level only, it is necessary to connect inputs H and D and connect them to one probe - in this case sensitivity is lowered by half (2.5.. 50 kΩ). Probe C can be connected with a protective wire of supply voltage (PE). To prevent undesirable switching out output contacts by various influences (sediment on probes, humidity...) it is possible to set sensitivity of the device according to conductivity of monitored liquid (corresponding to "resistance" of liquid) range 5 up to 100 kΩ. To reduce influences of undesirable switching of output contacts by liquid gorgle in tanks, it is possible to set delay of output reaction 0.5 - 10s.


Connection


Monitoring of two levels

Monitoring of one level

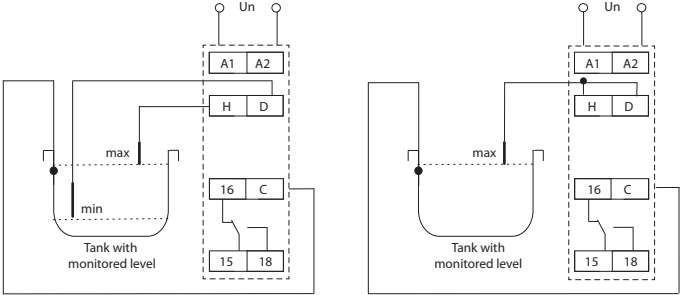

Symbol



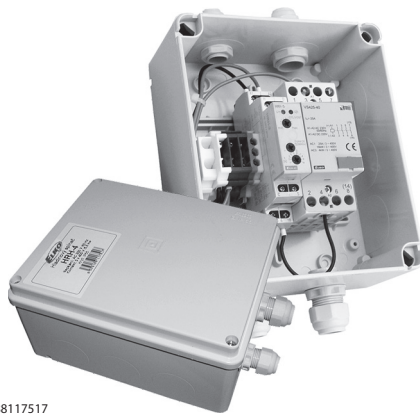

EAN code  
HRH-4 / 230V: 8595188117517  
HRH-4 / 24V: 8595188117500

Technical parameters		HRH-4
Function:		2
Voltage range:		AC/DC 230 V or AC/DC 24 V (AC 50 - 60 Hz)
Burden:		7 VA
Operating range:		-15 %; +10 %
<b>Measuring circuit</b>		
Sensitivity (input resistance):		adjustable in range 5 kΩ - 100 kΩ
Voltage on electrodes:		max. AC 3.5 V
Current on probes:		AC < 0.1 mA
Time response:		max. 400 ms
Max. capacity of probe cable:		800 nF (sensitivity 5 kΩ), 100 nF (sensitivity 100 kΩ)
Time delay (t):		adjustable, 0.5 - 10 sec
Time delay (t1):		1.5 sec
<b>Accuracy</b>		
Setting accuracy (mech.):		± 5 %
<b>Output</b>		
Number of contacts:		4x switching
Rated thermal current:		25 A
Loading in AC3:		4 kW / 400 V
Mechanical life:		3x10 <sup>6</sup>
<b>Other information</b>		
Operation temperature:		-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength (supply-output):		3.75 kV, galvanically insulated
Operating position:		any
Protection degree:		IP55
Pollution degree:		2
Dimensions:		160 x 135 x 83 mm (6.3" x 5.3" x 3.3")
Weight:		834 g (29.4 oz.)
Standards:		EN 60255-6, EN 61010-1
Recommended measuring probes:		see pg. 100


#### Function description

- 1) PUMP UP - in case the level falls under a lower limit (sensor D), a relay switches and a pump pumps a liquid up until it reaches an upper limit (probe H), then a relay opens and a pump stops pumping. When a level reaches a lower limit again, all process is repeated. After the device is energized, relay automatically closes and a pump pumps liquid to upper limit.
- 2) PUMP DOWN - in case a level reaches over an upper limit, a relay closes and a pump pumps liquid down. In case a level reaches a lower limit, a relay opens and a pump stops pumping. When energized, a relay is in an open state and a pump operates only after an upper limit is exceeded.
- 3) In case you combine inputs H and D and connect them to one probe, the device will keep only one level (upper and lower limit will become one). In function PUMP UP relay closes in case the level falls under a probe level. A pump pumps liquid up and in case the level reaches a probe level, a relay opens and a pump stops. The level is kept in a small range around the probe. In function PUMP DOWN relays closes in case a level reaches a probe level. A pump pumps down until the level reaches a probe, then relay opens and pump stops.


- In an easy way it automates operations of pumps depending on level.
- Control of level in wells, tanks, reservoirs...
- It is delivered as a connected set - easy installation.
- Possibility to monitor level of any type of conductive liquid.
- It serves for an automatic operation in 1-phased and 3-phased pumps.
- Set of level switch HRH-5 and a contactor VS425.
- Function choice - pumping up or down.
- Unit requires incoming over-current protection.
- Protection degree of the set is IP55.
- There is a possibility of 4 types of probes in a various design (they are not a part of this set, it is possible to deliver).
- Unit is placed in a plastic box with dimensions 160x135x 83 mm (6.3x 5.3x 3.3").

#### Function


##### Function PUMP UP

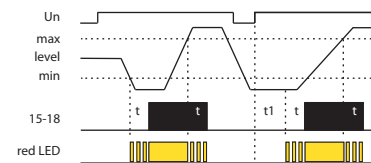


##### Function PUMP DOWN

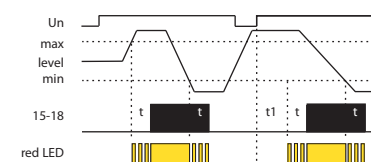

#### Connection

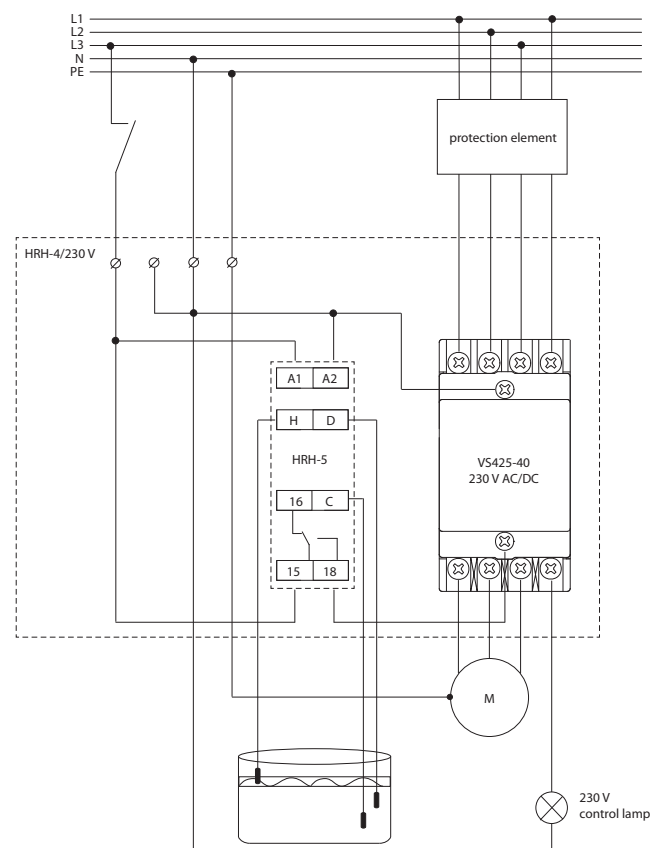

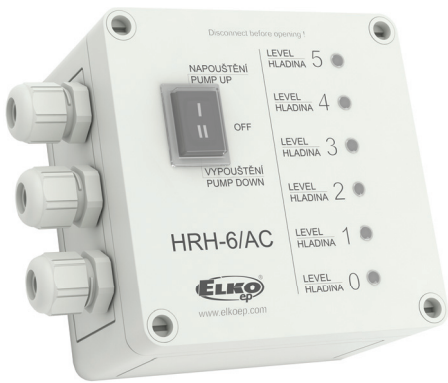

EAN code  
 HRH-6 / AC: 8595188136990  
 HRH-6 / DC: 8595188137409  
 HRH-6S: 8595188137416

Technical parameters	HRH-6/DC	HRH-6/AC
Function:	2	
Voltage range:	12.. 24 V DC	230 V AC / 50 - 60 Hz
Burden:	max. 1.8 W	max. 3.8 VA
Supply tolerance:	± 20%	-20 %; +10 %

Measuring circuit	
Sensitivity adjustable in the range*:	min. 10 kΩ max. 200 kΩ
Voltage on probes:	max. 3 V AC
Probe cable maximum capacity:	500 nF (for min. sensitivity), 50 nF (for maximum sensitivity)
Time delay:	adjustable 1.. 10 s


Output	
	6x LED (1x red, 1x yellow, 4x green)
Number of contacts:	1x NO-SPST (AgNi / Silver Alloy )
Current rating:	10 A / AC1
Switching voltage:	2500 VA / AC1, 200 W / DC
Peak current:	16 A / < 3 s
Switching voltage:	250 V AC1 / 24 V DC
Mechanical life (AC1):	3x10 <sup>7</sup>
Electrical life:	0.7x10 <sup>5</sup>

Other information	
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
El. strength (supply - probes):	x 3.75 kV
Operating position:	any
Protection degree:	IP65
Overvoltage category:	x III.
Pollution degree:	2
Dimensions:	110 x 135 x 72 mm (4.3" x 5.3" x 2.8")
Weight:	391 g (13.8 oz.) 288 g (10.16 oz.)
Standards:	EN 60255-6, EN 61010-1
Recommended measuring probe:	see pg. 100


\* Note: sensitivity is higher at both ends of a range of values.

Connection

HRH-6/DC




HRH-6/AC




- Function 1 monitors minimal and maximal level depth, for example in fire engine cars, tanks etc.
- Function 2 monitors level depth in water collectors, basins, pools etc.
- Selection of particular function is made by jumper on the front panel.
- Level depth is indicated on the panel of device by LED.
- Device monitors 5 levels by using six probes (one probe is common).
- Common probe can be replaced by a metal (conductive) tank.
- Level indication by six LED's on the front panel of the device.
- It is possible to connect another indication module (e.g. in fire-engine cabin).
- Adjustable sensitivity according to liquid conductivity.
- Adjustable time delay - elimination of level movement, e.g. while a tank is being filled up.
- Measuring frequency 10 Hz to prevent polarization of liquid.
- Supply voltage 12.. 24 V DC (to be used in fire-engines) or galvanically separated 230 V AC for general use.
- Contact relay 10 A for signalization of full / empty tank (according to a chosen function).
- Choice of functions PUMP UP / OFF / PUMP DOWN by a switch located on the front panel of the device.
- Protection degree IP65.

Description


HRH-6/DC Basic unit

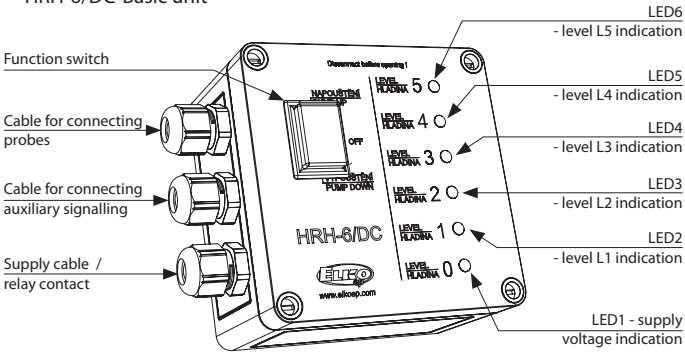

HRH-6/S Auxiliary signalling

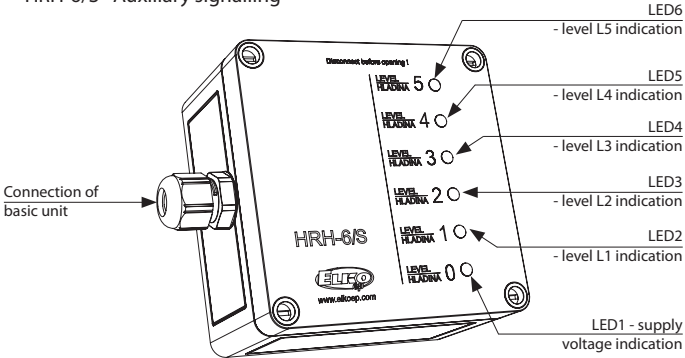


Setup elements (inside basic unit)

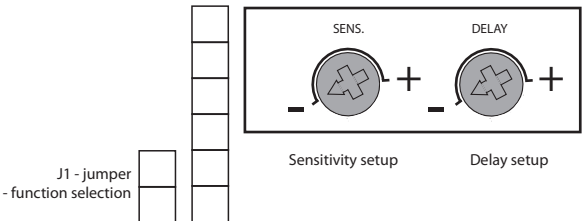




## HRH-6 block connecting

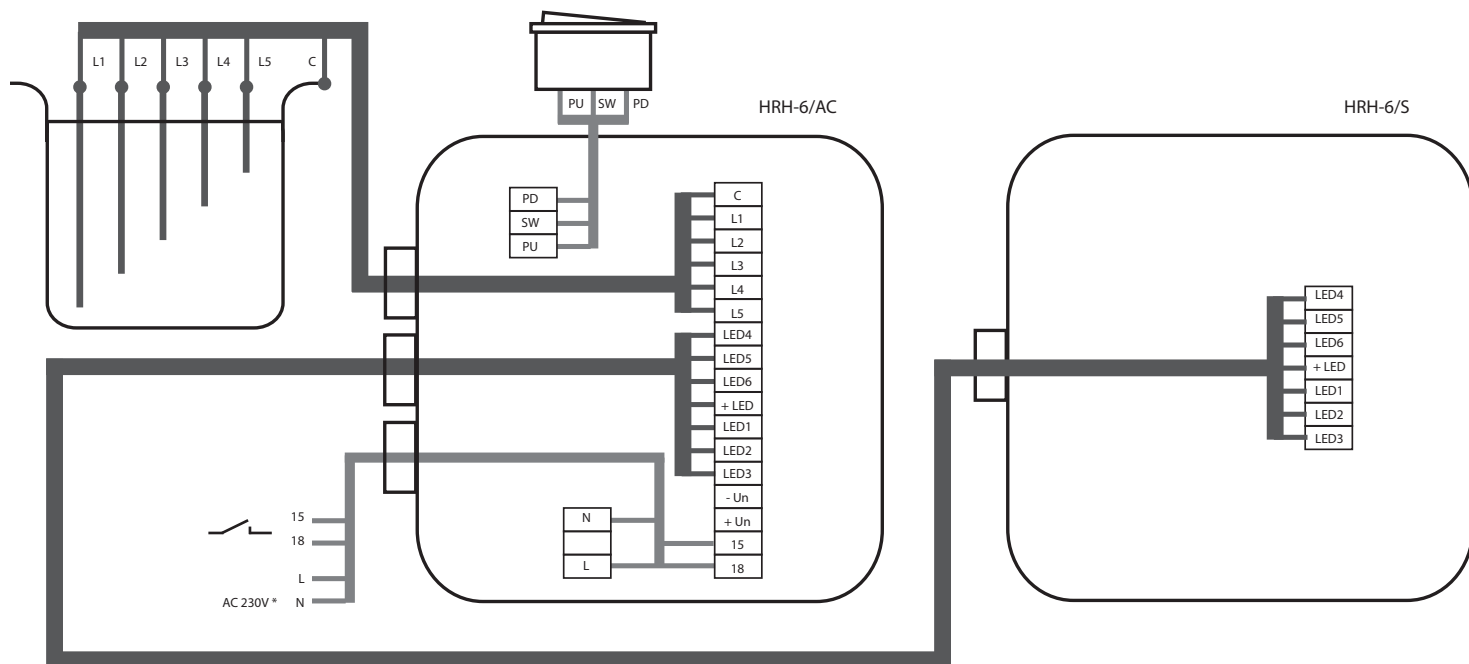

\* In case of HRH-6/DC, incoming supply is connected on terminals +Un and - Un.

## Functions

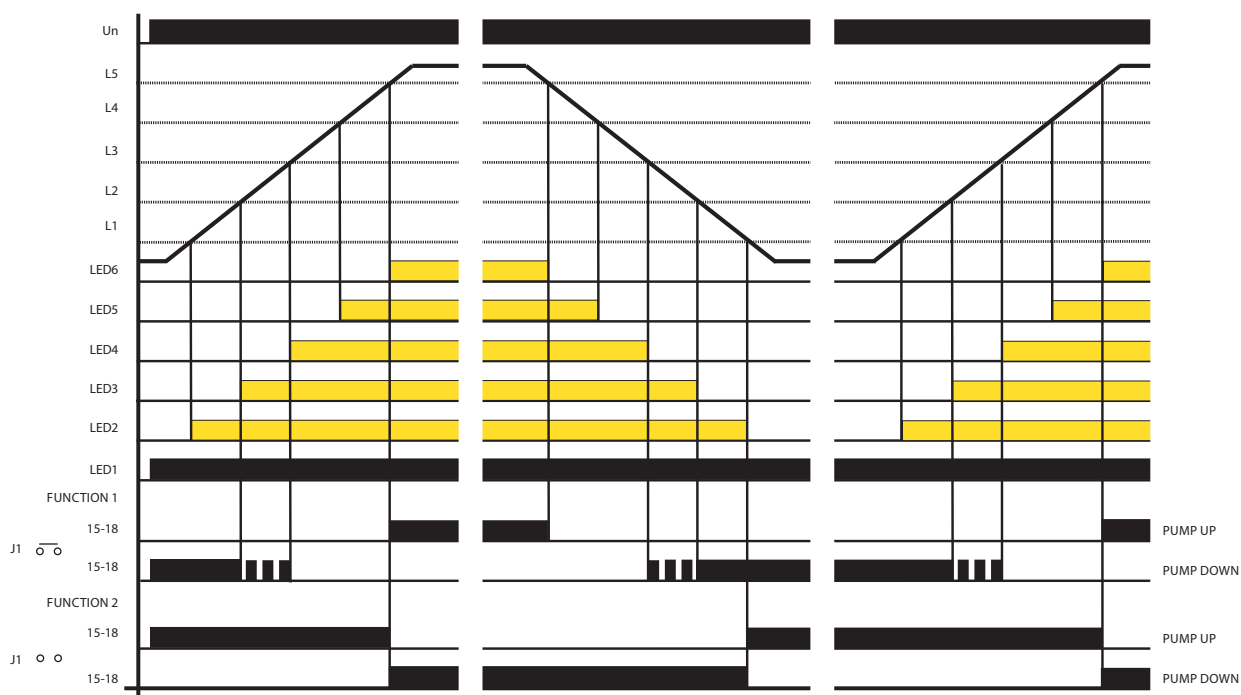

This device monitors level of a conductive liquid in a tank by using six single probes or one 6-fold probe. In case you use a tank made of a conductive material, it is possible to use it as a common probe C.

This common probe is connected to a pole of supply (for fire-engines it means its body) in case of supply voltage 12.. 24 V DC.

In case of supply voltage 230 V AC, the circuits are galvanically separated from the main.

The device is controlled by a three-position switch PUMP UP / OFF / PUMP DOWN. After switching into a position PUMP UP or PUMP DOWN, red LED1 shines and then also LED2.. LED6 according to liquid level. Output relay has 2 selectable functions.

Function setting is done by a jumper on basic board of HRH-6.

**Function 1:** (for use in fire-engines) - jumper is applied. In case of function PUMP UP and level reaching L5, the relay controlling e.g. acoustic signalization, permanently closes and indicated full tank. In case of PUMP DOWN function and level drop under level L3, relay periodically switches and under L2 it switches permanently (indicates almost empty tank).

**Function 2:** (for keeping liquid level) - jumper is not applied. In case of PUMP UP, sensor is switched until liquid reaches level L5. Then relay opens and switches again in case the liquid level falls under level L1. In case of PUMP DOWN - relay is switched until liquid falls under level L1. Then relay opens and switches again on level L5.

To eliminate LED flashing while level gurgles it is possible to delay reaction of probes (set delay 1.. 10s). According to conductivity of liquid it is possible to set sensitivity of probes (corresponding to "resistance" of liquid).





EAN code  
HRH-7: 8595188149471



Technical parameters		HRH-7
Function:		2
Supply terminals:		A1 - A2
Supply voltage:		24.. 240 V AC / DC (AC 50 - 60 Hz)
Burden:		max. 2 VA
Supply voltage tolerance:		-15 %; +10 %
Max. value of overcharge protection:		16 A
Measuring circuit		
Sensitivity (input resistance):		adjustable from 5 kΩ - 100 kΩ
Voltage on electrodes:		max. AC 3.5 V
Current on probes:		AC < 0.1 mA
Time response:		max. 400 ms
Max. capacity of probe cable:		800 nF (sensitivity 5kΩ), 100 nF (sensitivity 100 kΩ)
Time delay (t):		adjustable, 0.5 - 10 sec
Time delay (t1):		1.5 sec
Accuracy		
Setting accuracy (mechanical):		± 5 %
Output		
Number of contacts:		1x changeover / DPDT (AgSnO <sub>2</sub> )
Current rating:		16 A / AC1
- contact NO:		15-18: 6A / AC3
- contact NC:		15-16: 3A / AC3
Switching capacity:		4000 VA / AC1, 384 W / DC
Switching voltage:		250 V AC / 24 V DC
Mechanical life:		3x10 <sup>7</sup>
Electrical life (AC1):		0.7x10 <sup>5</sup>
Other information		
Operating temperature:		-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:		-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:		3.75 kV (supply - sensor)
Operating position:		any
Protection:		IP65
Overvoltage category:		III.
Contamination degree:		2
Cable size (mm <sup>2</sup> ):		max. 2x 2.5 / with sleeve max. 2x 1.5 (AWG 12)
Dimension:		114 x 114 x 56 mm (4.5 x 4.5 x 2.2")
Weight:		234 g (8.3 oz.)
Related standards:		EN 60255-6, EN 61010-1
Recommended measuring probes:		see pg. 100

- Suitable to operate / work in harsh conditions due to the high degree of protection IP65
- Switch monitors the level changes in wells, reservoirs, tanks, tankers etc.
- It is possible to select the following configurations:
  - one-level switch of conductive liquids monitors one level (by connecting H and D)
  - two-level switch of conductive liquids monitors two levels (switches on at one level and switched off at another level)
- Choice of function PUMP-UP or PUMP-DOWN
- Adjustable time delay of output (0.5 - 10 s)
- Adjustable sensitivity using potentiometer (5 - 100 kΩ)
- Measuring frequency 10 Hz prevents liquid polarization and increased oxidation of measuring probes
- Measuring circuits are galvanically separated from the power source of the product and circuits of the relay contact by enhanced insulation according to EN 60664-1 for overvoltage category III.
- Output contact: 1x changeover / DPDT 16 A / 250 V AC1


Device description

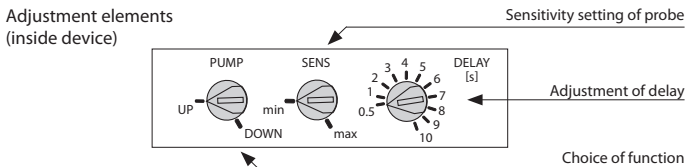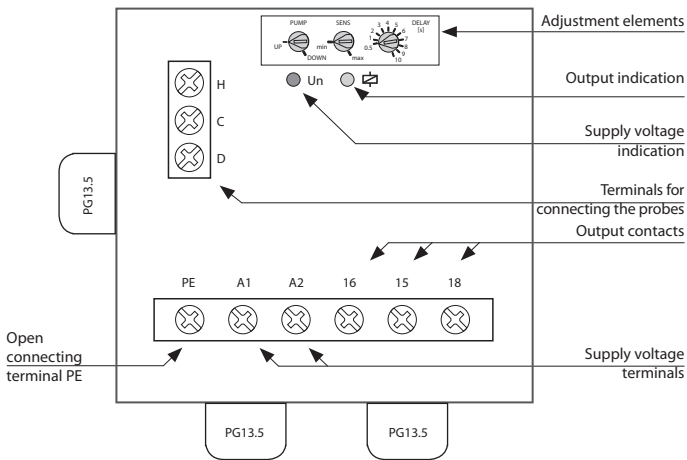

Connection

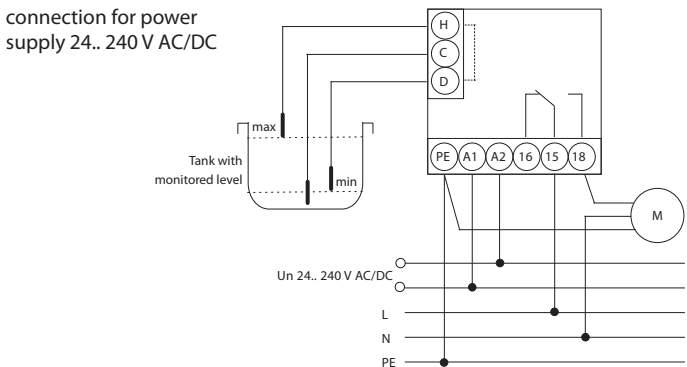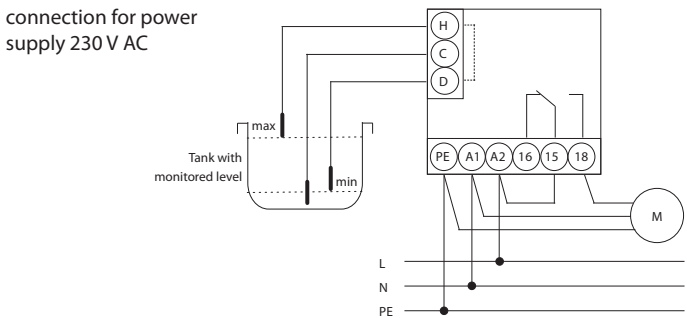


Symbol




## Function

Function PUMP-UP

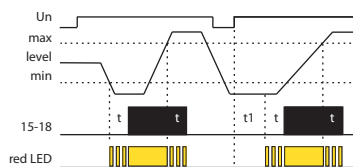

Function PUMP-DOWN

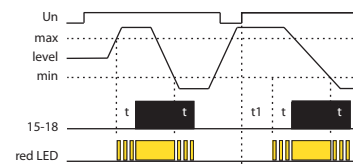


An AC current is used for measuring to prevent polarization and electrolysis of fluid and unwanted oxidation of measuring probes. Three probes are used for measuring: H - upper level, D - lower level and C - common probe. If using a tank made from conductive material, it is possible to use the tank itself as probe C. If it is necessary to monitor only one level, there are two connection options:

1. Inputs H and D are connected to a single probe - in this case the sensitivity is decreased to half (2.5.. 50 kΩ).
2. Inputs H and C are connected and the probe is connected to input D - in this case, the original sensitivity remains (5..100 kΩ).

It is also possible to connect probe C with a protective conductor of the power system (PE).

## Example of connecting the level switch to a 1-phase pump at a well, borehole

wiring for supply 230 V AC (for monitoring two levels)

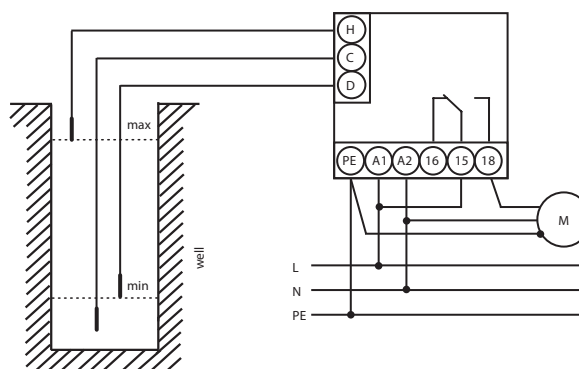

### Monitoring TWO LEVELS of the FLUID LEVEL minimum / maximum - DRAINING function - (PUMP DOWN)

Description of draining function:

This function is used in a well or borehole where the difference between the upper and lower probes determines how much water the pump can pump out and protect against running dry.

After detecting the maximum level, the set reaction delay begins running. After this period, the output contact immediately switches on the pump until the minimum level is reached, when the set delay begins running once again. The pump then switches off.

### Monitoring TWO LEVELS minimum / maximum - REPLENISHING function - (PUMP UP)


Description of replenishing function:

This function is used when you need to regularly pump in water to a well or borehole, which is leaking.

After detecting the minimum level, the set reaction delay begins running. After this period, the output contact immediately switches on the pump for the period until it reaches the maximum level, where the set delay begins running once again. The pump then switches off.

## Example of connecting the level switch to a 3-phase pump at the well, borehole

wiring for supply 230 V AC (for monitoring two levels)

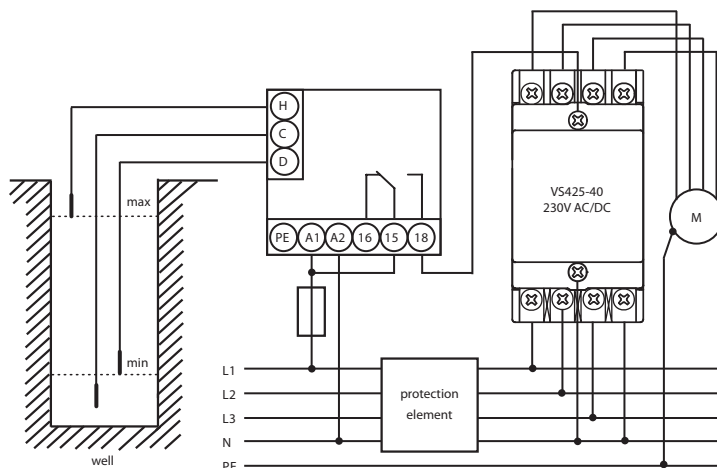

### Monitoring TWO LEVELS minimum / maximum - DRAINING function - (PUMP DOWN)

Description of draining function:

The function is used to protect against overflows and flooding of areas. After detecting the maximum level, the set reaction delay begins running. After this period, the output contact immediately switches on the 3-phase pump until the minimum level is reached, when the set delay begins running once again. The pump then switches off.

INNOVATION




EAN code  
HRH-8/110V: 8595188156387  
HRH-8/230V: 8595188155427  
HRH-8/24V: 8595188155564  
HRH-8/400V: 8595188171199

Technical parameters		HRH-8
Function:	8	
Supply terminals:	A1 - A2	
Voltage range:	AC 110 V, AC 230 V, AC 400 V or AC/DC 24V galvanically separated (AC 50-60Hz)	
Burden max.:	2.5 W / 5 VA (AC 230 V, AC 110 V, AC 400 V), 1.4 W / 2 VA (AC/DC 24 V)	
Supply voltage tolerance:	-15 %; +10 %	
Measuring circuit		
Hysteresis (input - opening):	in an adjustable range 5 kΩ - 100 kΩ	
Voltage on electrode:	max. AC 3.5 V	
Current in probes:	AC < 1 mA	
Time reaction:	max. 400 ms	
Max. cable capacity:	800 nF (sensitivity 5kΩ), 100 nF (sensitivity 100 kΩ)	
Time delay t:	adjustable 0.5 -10 sec	
Accuracy		
Setting accuracy (mech.):	± 5 %	
Output		
Number of contacts:	2x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	16 A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x1.5 / with cavern max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")	
Weight:	8.7 oz (248 g) (110 V, 230 V, 400 V); 5.2 oz (147 g) (24 V)	
Standards:	EN 60255-6, EN 61010-1	
Measuring sensors:	see pg. 100	


- Relay is designed to control the level of conductive liquids in wells, tanks, pools, tankers, reservoirs... (replacement HRH-1)
- Galvanically isolated supply and guard circuits
- Within one device, the following configurations can be selected:
  - 2x one-level monitoring (in separate tanks)
  - 1x two-level monitoring (in one tank)
  - Pumping from one tank to another
- DIP switch selection on the front panel (8 functions)
- Adjustable probe sensitivity (for each probe separately)
- Adjustable relay switching delay (for each probe separately)
- 10Hz watch frequency prevents polarization of the liquid and increases resistance to interference by network frequency
- 2x output relay (with changeover contact 16A / 250V AC1)
- 3-MODULE design, mounting onto DIN rail.

Description

HRH-8/24V

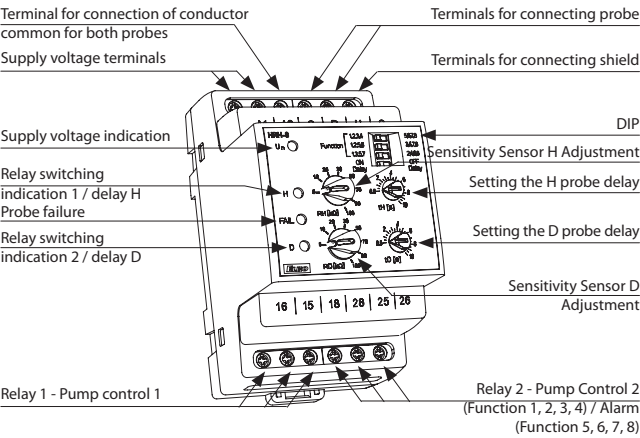


Description and importance of DIP switches

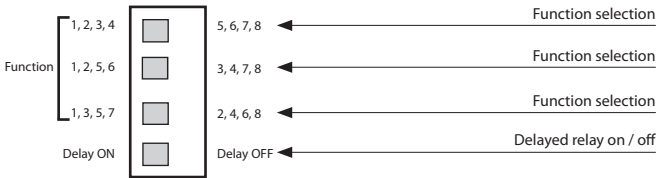

Connection

Symbol

HRH-8/24V

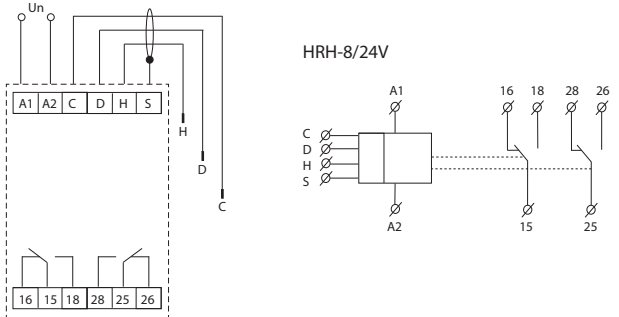

Measuring probes


There can be any measuring probe (any conductive contact, it is recommended to use brass or stainless steel).  
The probe wire does not need to be shielded, but it is recommended.  
When using a shielded wire, the shielding is connected to terminal S.

## Functions


PUMP UP, ON DELAY (Function 1,3,4)




PUMP UP, OFF DELAY (Function 1,3,4)




PUMP UP, OFF DELAY (Function 5)

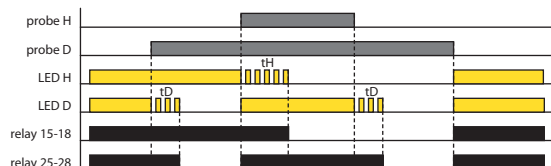


PUMP DOWN, OFF DELAY (Function 6)

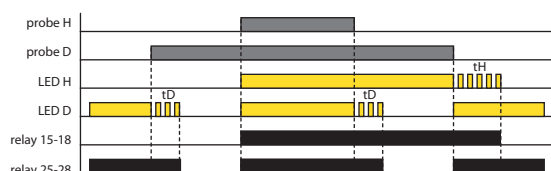


WELL - TANK, OFF DELAY (Function 7)

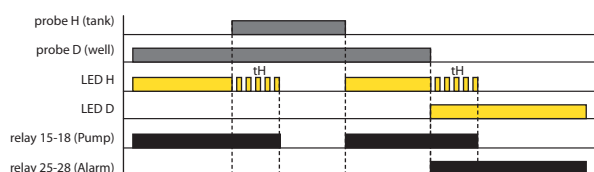

RESERVOIRS - TANK, OFF DELAY (Function 8)

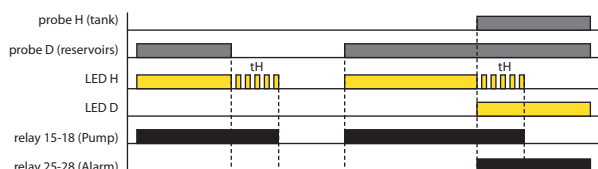


PUMP DOWN, ON DELAY (Function 2,3,4)




PUMP DOWN, OFF DELAY (Function 2,3,4)




PUMP UP, ON DELAY (Function 5)

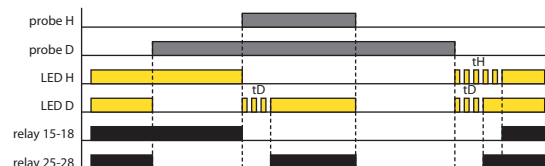


PUMP DOWN, ON DELAY (Function 6)

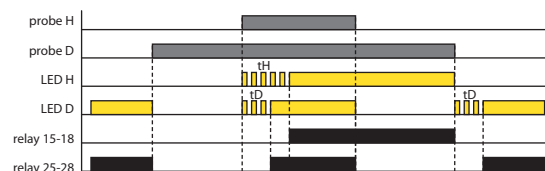

WELL - TANK, ON DELAY (Function 7)

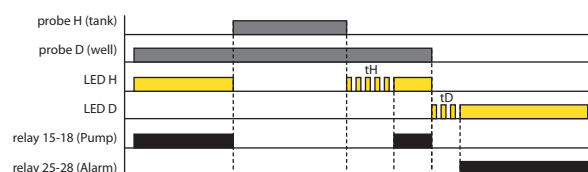

RESERVOIRS - TANK, ON DELAY (Function 8)

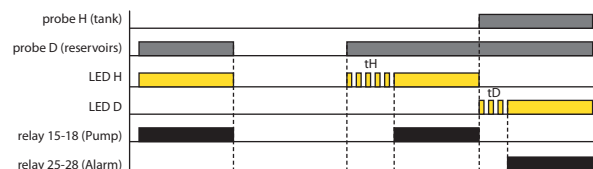

The relay is designed to monitor the level of conductive liquids with a choice of 8 functions:

- 1) - 2 separate tanks (each with 1 probe) - both PUMP UP (filling)
- 2) - 2 separate tanks (each with 1 probe) - both PUMP DOWN (emptying)
- 3) - 2 separate tanks (each with 1 probe) - H PUMP DOWN probe, D PUMP UP probe
- 4) - 2 separate tanks (each with 1 probe) - H PUMP UP probe, probe D PUMP DOWN
- 5) - both probes in one tank - PUMP UP - maintain level between probes H and D (as HRH-5), relay 1 switches on the pump, relay 2 alarm (level is not between probes H and D)
- 6) - Both probes in one tank - PUMP DOWN - maintaining the level between probes H and D (as HRH-5), relay 1 switches on the pump, relay 2 alarm (the level is not between probes H and D)
- 7) - Pumping from the well to the tank - probe D in the well, probe H in the tank. The pump only runs if the probe D is flooded (enough water in the well) and the tank is not full (probe H). The alarm reports a lack of water in the well (probe D is not flooded).
- 8) - Pumping from the sump to the tank - probe D in the sump, probe H in the tank. The pump only runs if the probe D is flooded (full tank) and the tank is not full (probe H). The alarm reports the status of full tank and sump (both probes are flooded).

LED indication:

The red LED lights up - the corresponding relay is switched on  
Red LED flashes - delay timing

The yellow LED indicates probe failure - Functions 5, 6 probe H is flooded and probe D is not. At the same time both red LEDs flash.

To prevent polarization and electrolysis of the liquid and undesirable oxidation of the monitoring probes, an AC current of 10 Hz is used for monitoring. The low frequency has a positive effect on suppression of interference by 50 (60) Hz. Three probes are used to monitor the level: H - upper level, D - lower level and C - common probe. In the case of the use of a conductive material tank, it is possible to use the tank itself as a C probe. Probe C can also be connected to the protective conductor of the power supply system (PE). To prevent undesired switching by various influences (soiling of dips, moisture ...), the sensitivity of the device can be set according to the conductivity of the liquid being monitored (corresponding to the "resistance" of the liquid) in the range of 5 to 100 kΩ. To limit the effect of undesired switching of output contacts by raising the liquid level in the tank, it is possible to set the output response delay 0.5 - 10 s.



EAN code  
HRH-VS: 8595188150699  
HRH-MS-1A: 8595188150873  
HRH-MS-1.6A: 8595188150705  
HRH-MS-VS-2.5A: 8595188150880  
HRH-MS-VS-4A: 8595188150712  
HRH-MS-VS-6.3A: 8595188150835

- Level sets are used to monitor levels in wells, reservoirs, tanks...
- Advantage is the possibility of setting PUMP UP and PUMP DOWN and also delayed switching (e.g. in case of level fluctuations).
- The possibility of connection to 1 or 3-phase pump (depending on the type of set).
- Easy to install without complicated wiring - ready for installation.
- There are Level sets placed in switchboard with IP65 protection (protected against dust and against water jets)
  - **HRH-VS:** level switch HRH-5 with installation contactor VS425-40 (25A contact)
  - **HRH-MS-1A:** level switch HRH-5 with motor starter MS18 0.63-1A
  - **HRH-MS-1.6A:** level switch HRH-5 with motor starter MS18 1-1.6A
  - **HRH-MS-VS-2.5A:** level switch HRH-5 with installation contactor VS425-40 (25A contact) and with motor starter MS18 1.6-2.5 A
  - **HRH-MS-VS-4A:** level switch HRH-5 with installation contactor VS425-40 (25A contact) and with motor starter MS18 2.5-4 A
  - **HRH-MS-VS-6.3A:** level switch HRH-5 with installation contactor VS425-40 (25A contact) and with motor starter MS18 4-6.3 A

Technical parameters	HRH-VS	HRH- MS-1A	HRH-MS-1.6A	HRH-MS-VS-2.5A	HRH-MS-VS-4A	HRH-MS-VS-6.3A
Function:	2					
Voltage range:	230 / 400 V AC 50 - 60 Hz					
Input:	4.6 VA	2 VA	2 VA	4.6 VA	4.6 VA	4.6 VA
Toleration of voltage range:	-15 %; +10 %					
Measuring circuit						
Sensitivity (input impedance):	adjustable in range 5 kΩ - 100 kΩ					
Voltage on the electrodes:	max. AC 3.5 V					
Current in probes:	AC < 0.1 mA					
Time response:	max. 400 ms					
Max. capacity of probe cable:	800 nF (sensitivity 5 kΩ), 100 nF (sensitivity 100 kΩ)					
Time delay (t):	adjustable, 0.5 - 10 sec					
Time delay after switching on (t1):	1.5 sec					
Accuracy:						
Setting accuracy (mech.):	± 5 %					
Output						
Number of contacts:	4	1	1	4	4	4
Rated thermal current:	25 A	8 A	8 A	25 A	25 A	25 A
Load on AC3:	4 kW	1 A	1.6 A	2.5 A	4 A	6.3 A
Switching voltage:	230 V / 400 V	230 V	230 V	400 V AC	400 V AC	400 V AC
Electric life (A3):	0.5 x 10 <sup>6</sup>	1 x10 <sup>5</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>
Current setting range MS18:	-	0.63 - 1 A	1 - 1.6 A	1.6 - 2.5 A	2.5 - 4 A	4 - 6.3 A
Other information						
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)					
Storage temperature:	-25 °C to 70 °C (-13 °F to 158 °F)					
Electrical strength:	3.75 kV (supply - probe)					
Operating position:	any					
Protection degree:	IP65 set					
Pollution degree:	2					
Dimension:	201 x 128 x 120 mm (7.9 x 5 x 4.7")			201 x 202 x 120 mm (7.9 x 7.9 x 4.7")		
Weight:	842 g (29.7 oz)	872 g (30.7oz.)	872 g (30.7oz.)	1342 g (47.3 oz.)	1342 g (47.3 oz.)	1342 g (47.3 oz.)
Related standards:	EN 60255-6, EN 61010-1					
Recommended measuring probes:	see pg. 100					

Functions

PUMP DOWN function (DOWN) used for protection against Idle Running or against overflow and flooding areas.

Detecting the maximum level results in activation of adjusted delayed response. After that output contact immediately turns on single or 3-phase pump until it reaches the minimum level. Then the pump turns off.

In case that a reservoir is made of a conductive material e.g. metal tanks, there can be a difference in connection of HRH-5 leve sets - it is not necessary to put inside a common probe „C“ and connect with SHR-2 probe, but thanks to conductivity of vessel we can connect probe C to the reservoir body.

The length of wire cable (between the level switch and probe) can be up to 50 m. We don't recommend placing near the power lines, because the sensitivity of equipment can be affected and thus the entire functionality.


Recommended accessories:

- 3 wire cable D03VV-F 3x0,75/3,2
- 1 wire cable D05V-K 0,75/3,2
- SHR-2 probe - probe covered by PVC (protected) - used in moderately polluted waters, drilling, wells. Assembly - hanging in the well.




Connection


Level set HRH-VS

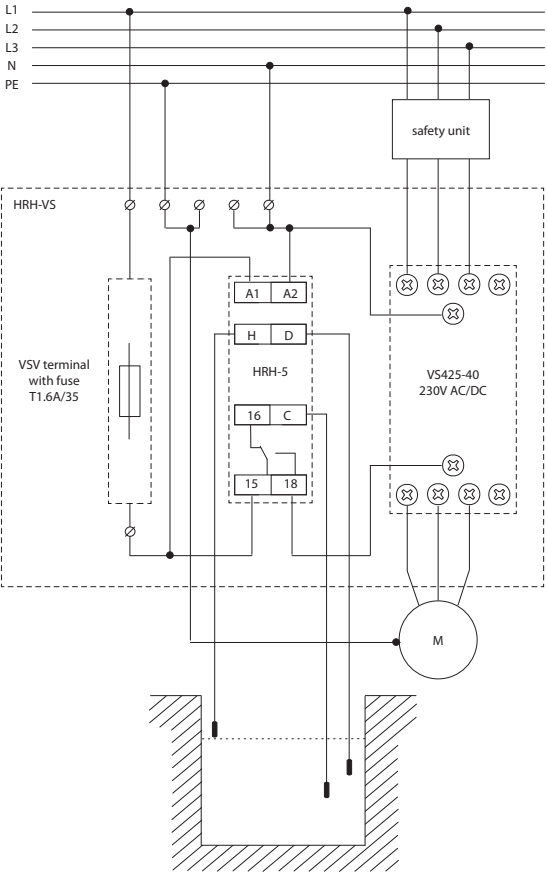

Level set HRH-MS-1A (HRH-MS-1.6A)

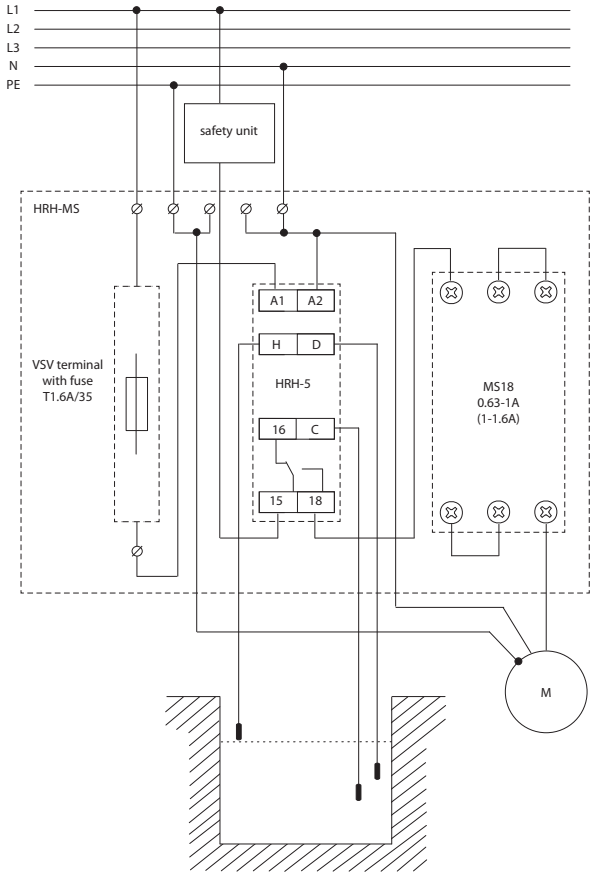

Level set HRH-MS-VS-2.5A (HRH-MS-VS-4A, HRH-MS-VS-6.3A)

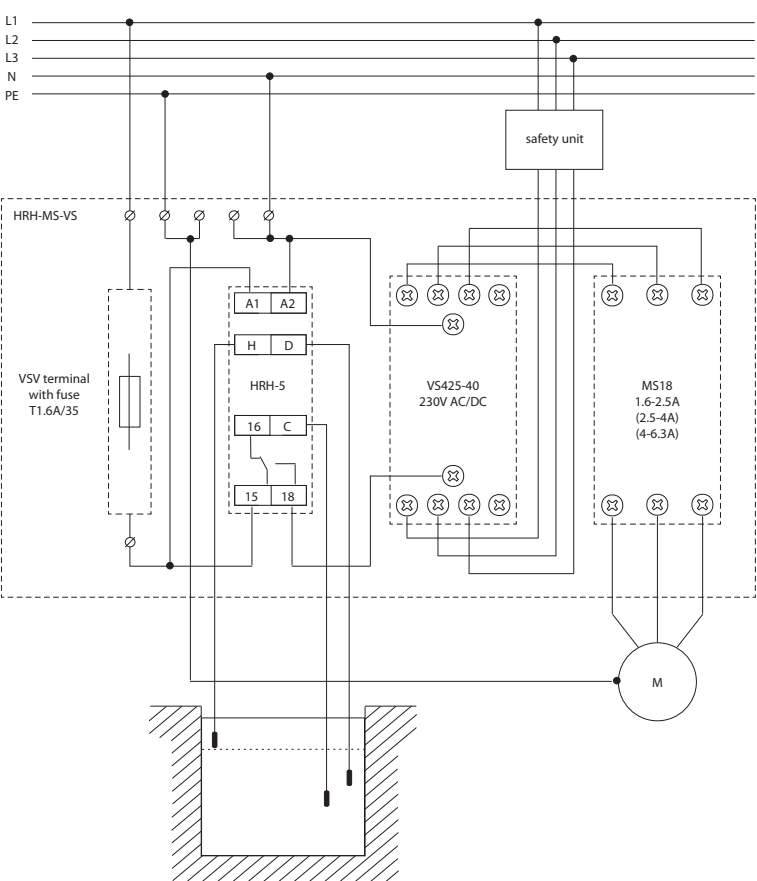

**SHR-1-M, SHR-1-N, SHR-2, SHR-3 | Level sensors**

EAN code  
SHR-1-M: 8595188110105  
SHR-1-N: 8595188111379

**SHR-1-M:** brass sensor

**SHR-1-N:** stainless steel sensor

- Sensor to control flooding.
- Suitable for use in drinking water.
- Electrode with diameter 4 mm (0.2") is placed in plastic cover.
- Panel or to holder mounting.
- Conductor is connected to terminal board, shrink bushing for feeder place insulation is a part of device.
- Max. wire profile: 2.5 mm<sup>2</sup> (AWG10).
- Installation: after connecting a wire to the sensor, run the shrink bushing over the wire onto the sensor.
- Heat the sensor and by shrinking the connection of sensor and wire will be hermetical.
- Weight: 9.7 g (0.3 oz.).
- Operating temperature: -25 °C to +60 °C (-13 °F to 140 °F).
- Total sensor length: 65.5mm (2.58 ").



EAN code  
SHR-2: 8595188111263

**Level probe SHR-2**

- Detection sensor is electrode, which in connection with switchable device is used for level detection for example in wells, tanks,...
- To be used in electric conductive fluids and mechanically polluted fluids with temperature: 1°C to 80°C (33.8 °F to 176°F).
- Suitable for use in drinking water.
- Stainless steel one-pole electrode reside in PVC cover, intended for tank wall mounting or mounting by socket.
- To ensure correct function of the sensor, it is necessary to have the electrode without dirt which could disable the connection of the electrode and fluid and thus lead to malfunction.
- Max. wire profile: 2.5 mm<sup>2</sup> (AWG 10).
- Recommended wire D05V-K0.75/3.2.
- Installation:
  - conductor wire is connected by fastening of two brass screws to stainless steel electrode.
  - conductor is caulked by bushing Pg7 with protection degree IP68.
- Weight: 48.6 g (1.7 oz.)
- Dimensions: max. diameter 21 mm (0.8"), length 96 mm (3.8").

SHR-2 in open state



EAN code  
SHR-3: 8595188111270

**Level probe SHR-3**

- Stainless probe to be used into demanding industrial environments, designated for screwing into tank wall or cover.
- Suitable for use in drinking water
- The probe is installed in horizontal, vertical or in sidelong position on tank side or in tank cover. Installation is done by soldering or by fixing nut. It is necessary to use 24 mm (1") screw. It is necessary to use an adequate torque with regards to a seal and operational over-pressure in a tank.
- Sensor has connecting wire - length 3 m, which is connected to sensor to scan electrode and sensor bushing connecting wire is double-wire PVC AWG 18 (0.75 mm<sup>2</sup>), connection of wires: brown - scan electrode, blue - sensor bushing.
- Connection M18x1.5 screw.
- Protection degree IP 67.
- Sensor weight without cable: 100 g (3.3 oz.).
- Operating surroundings: place without the danger of detonation, temperature on screw: max. 95°C (203°F).
- Pressure immunity: on 25 °C (77 °F) 4 MPa, on 95 °C (203 °F) 1.5 MPa.
- Weight: 239 g (8.4 oz.).
- Material: bushing and scan electrode: stainless steel W.Nr. 1.4301, insulation insert of electrode: PTFE.
- Internal material: self-extinguishing epoxide resin.
- Operating temperature: -25 °C to 60 °C (-13 °F to 140 °F).
- Total sensor length: 65.5mm (2.58 ").


**D03VV-F** | Three-core cable

EAN code  
D03VV-F 3x0.75/3.2: 8595188165884

**Technical parameters** **D03VV-F 3x0.75/3.2**

Rated voltage:	300 / 300 V
Test voltage:	2 kV
Capacity:	max. 12.3 nF / 100 m (328')
Core diameter with insulation:	3.2 mm (0.12")
Overall diameter of cable:	8.1 mm (0.31")
Section:	0.75 mm <sup>2</sup> (AWG 18)
Length:	1 m (39.37")

- Cable to probes SHR-1 and SHR-2, 3x 0.75 mm<sup>2</sup> (AWG 18) with a certification for drinking water, 1m (39.37").
- Construction:
  - bright copper stranded core of hole
  - core insulation of special PVC
  - sheath of special PVC.
- Technical specifications and usage:
  - the product meets requirements for direct and permanent contact with drinking water according to § 5 of the Act. 258/2000 Decree of the Ministry of Health. 409/2005 Sb., On hygienic requirements for products coming into direct contact with drinking water and water treatment
  - usable up to 70 °C (158 °F)
  - suitable for submersible conductivity probes for the boreholes, wells and tanks
  - suitable for probes used for level detection of conductive liquids.
  - cable capacity is max. 12.3 nF / 100 m (328')

**Cross-section****D05V-K** | Power cable

EAN code  
D05V-K 0.75/3.2: 8595188165945

**Technical parameters** **D05V-K 0.75/3.2**

Rated voltage:	300 / 500 V
Test voltage:	2 kV
Capacity:	max. 12.3 nF / 100 m (328')
Core diameter with insulation:	3.2 mm (0.12")
Section:	0.75 mm <sup>2</sup> (AWG 18)
Length:	1 m (39.37")

- Cable to probes SHR-1 and SHR-2, 3x 0.75 mm<sup>2</sup> (AWG 18) with a certification for drinking water, 1m (39.37").
- Construction:
  - bright copper stranded core of hole
  - insulation of special PVC.
- Technical specifications and usage:
  - the product meets requirements for direct and permanent contact with drinking water according to § 5 of the Act. 258/2000 Decree of the Ministry of Health. 409/2005 Sb., On hygienic requirements for products coming into direct contact with drinking water and water treatment
  - usable up to 70 °C (158 °F)
  - suitable for probes used for level detection of conductive liquids.



Type	Design	Type		Sensor			Supply				Temperature range	Hysteresis	Relative humidity	Designation	Page of catalogue
		Analog	Digital	In-built	External	Type	AC 230V	AC 24V	AC/DC 24 ..240V	Galv. separated					
TER-3A	1M-DIN	●	x	x	●	NTC	x	x	●	x	-30 ..10 °C (-22 °F to 50 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	single thermostat into a switchboard with external sensor for temperature in cooling and against freezing	104
TER-3B	1M-DIN	●	x	x	●	NTC	x	x	●	x	0 .. 40 °C (32 °F to 104 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	single thermostat into a switchboards with external sensor for sensing room and operational temperature	104
TER-3C	1M-DIN	●	x	x	●	NTC	x	x	●	x	+30 .. 70 °C (86 °F to 158 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	single thermostat into a switchboards with external sensor for sensing temperature in devices (overheating...)	104
TER-3D	1M-DIN	●	x	x	●	NTC	x	x	●	x	0 .. 60 °C (32 °F to 140 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	single thermostat into a switchboard with external sensor for sensing operational temperature of machines and devices	104
TER-3E	1M-DIN	●	x	x	●	NTC	x	x	●	x	0 .. 60 °C (32 °F to 140 °F)	1 °C (34 °F)	x	as TER-3D but with fixed hysteresis	105
TER-3F	1M-DIN	●	x	●	x	NTC	x	x	●	x	0 .. 60 °C (32 °F to 113 °F)	1 °C (34 °F)	x	single thermostat into a switchboard with in-built sensor, monitors operational temperature in a switchboard	105
TER-3G	1M-DIN	●	x	x	●	Pt100	x	x	●	x	0 .. 60 °C (32 °F to 140 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	as TER-3D but with input for sensor Pt100	104
TER-3H	1M-DIN	●	x	x	●	NTC	x	x	●	x	-15 .. 45 °C (5 °F to 113 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	as TER-3A but with a different temperature range - for cooling and heating	104
TER-4	3M-DIN	●	x	x	● (2x)	NTC	●	●	x	●	-40 .. 110 °C (-40 °F to 230 °F)	0.5 - 2.5 °C (32.9 °F to 37 °F)	x	two-state thermostat (2 inputs, 2 outputs), two independent or dependent thermostats, accurate setting, wide temperature range	106
TER-7	1M-DIN	●	x	x	●	PTC	x	x	●	x	x	Resistance 1.8-3.3 kΩ	x	thermistor relay for protection of motor overheating, input designated for sensor PTC in-built in motor winding	110
TER-9	2M-DIN	x	●	x	● (2x)	NTC	●	●	x	●	-40 .. 110 °C (-40 °F to 230 °F)	0.5 - 5 °C (32.9 °F to 41 °F)	x	multifunction (6thermo functions) digital thermostat with in-built time switch clock, 2 inputs/2 outputs	108
TEV-1	IP65 box	●	x	x	●	INTC	●	x	x	x	-20 .. 20 °C (-4 °F to 68 °F)	1.5 °C (35 °F)	x	thermostat with "dead zone", control of heating and protection against freezing, box for outdoor use with IP65	114
TEV-2	IP65 box	●	x	x	●	NTC	●	x	x	x	-20 .. 20 °C (-4 °F to 68 °F)	1.5 °C (35 °F)	x	single thermostat for regulation of heating, short sensor is a part of this device, protection degree IP65	115
TEV-3	IP65 box	●	x	x	●	NTC	●	x	x	x	5 .. 35 °C (41 °F to 149 °F)	1.5 °C (35 °F)	x	as TEV-2 but potentiometer and indication are placed on front panel	115
TEV-4	IP65 box	x	x	x	●	NTC	●	x	x	x	-30 .. 65 °C (-22 °F to 149 °F)	0.5 / 1.5 / 4 °C (32.9 / 35 / 39 °F)	x	single exteriors thermostat for monitoring and regulation of temperature in demanding enviroments	116
ATR	ELEGANT	●	x	●	x	NTC	●	x	x	x	5 .. 40 °C (41 °F to 104 °F)	1 °C (34 °F)	x	room analog thermostat line THERMO for mounting into a wiring box	111
ATF	ELEGANT	●	x	x	●	NTC	●	x	x	x	5 .. 50 °C (41 °F to 122 °F)	1 °C (34 °F)	x	floor analog thermostat line THERMO for mounting into a wiring box	111
ATC	ELEGANT	●	x	●	●	NTC	●	x	x	x	5 .. 50 °C (41 °F to 122 °F)	1 °C (34 °F)	x	room and floor (combined) analog thermostat line THERMO for mounting into a wiring box	111
DTR	ELEGANT	x	●	●	x	NTC	●	x	x	x	5 .. 50 °C (41 °F to 122 °F)	0.5 - 1 °C (32.9 °F to 34 °F)	x	room digital thermostat line THERMO for mounting into a wiring box	112
DTF	ELEGANT	x	●	x	●	NTC	●	x	x	x	5 .. 50 °C (41 °F to 122 °F)	0.5 - 1 °C (32.9 °F to 34 °F)	x	floor digital thermostat line THERMO for mounting into a wiring box	112
DTC	ELEGANT	x	●	●	●	NTC	●	x	x	x	5 .. 50 °C (41 °F to 122 °F)	0.5 - 1 °C (32.9 °F to 34 °F)	x	room and floor (combined) digital thermostat line THERMO for mounting into a wiring box	112
RHT-1	1M-DIN	●	x	●	x	built-in	x	x	●	x	0 .. 60 °C (32 °F to 140 °F)	H - 4 % T- 2.5°C (36.5°F)	50.. 90%	hygro-thermostat for temperature monitoring and regulation in range 0 °C to +60 °C (32 °F to 140 °F) and relative humidity in range 50.. 90%	117
RHV-1	IP65	●	x	●	x	built-in	x	x	x	x	-30 .. 60 °C (-22 °F to 140 °F)	2%, 3%, 4%	0 ... 30 % RH 30 ... 60 % RH 60 ... 90 % RH	hygro-thermostat for humidity monitoring and regulation in range 0.. 90 % RH	118
ATV-1	valve	x	●	●	x	built-in	x	x	x	x	8 .. 28 °C (46°F to 82°F)	x	x	thermostatic direction valves, temperature regulation +8 to +28°C (46°F to 82°F)	113



EAN code  
TER-3A: 8595188138390  
TER-3B: 8595188138406  
TER-3C: 8595188138413  
TER-3D: 8595188138420  
TER-3G: 8595188138451  
TER-3H: 8595188138468


Technical parameters		TER-3
Function:	single level	
Supply terminals:	A1-A2	
Voltage range:	AC/DC 24 - 240V (galvanically unseparated) (AC 50-60Hz)	
Burden:	2 VA	
Operating range:	- 15 %; + 10 %	
Measuring circuit		
Measuring terminals:	T1 - T1	
Temperature range: (according to product type sensitivity)	TER-3A -30 °C to 10 °C (-22 °F to 50 °F) TER-3B 0 °C to 40 °C (32 °F to 104 °F) TER-3C 30 °C to 70 °C (86 °F to 158 °F) TER-3D 0 °C to 60 °C (32 °F to 140 °F) TER-3G 0 °C to 60 °C (32 °F to 140 °F) TER-3H -15 °C to 45 °C (5 °F to 113 °F)	
Hysteresis:	ajustable in range 0.5 to 5°C / 0.9 to 9 °F	
Sensor:	external, thermistor NTC, except for TER-3G (Pt100)	
Sensor fault indication (short circuit / disconnect):	flashing red LED	
Accuracy		
Setting accuracy (mech.):	5 %	
Switching difference:	0.5 °C / 0.9 °F	
Temperature dependance:	< 0.1 % / °C (< 0.1 % / °F)	
Output		
Number of contacts:	1x NO-SPST (AgSnO <sub>2</sub> )	
Current rating:	16A / AC1, 10A / 24V DC	
Breaking capacity:	4000 VA / AC1, 300 W / DC	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	2.5 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	73 g (2.6 oz.)	
Standards:	EN 60730-2-9, EN 61010-1	

Example of an order


Please specify a type of thermostat in your order (TER-3A, TER-3B .. or TER-3H) types differ in temperature range and supply voltage.

- Single thermostat for temperature monitoring and regulation in range -30 °C to +70 °C (-22 °F to 158 °F) in six ranges.
- It can be used for monitoring temperature e.g. in switchboards, heating systems, cooling systems, liquids, radiators, motors, devices, open spaces, etc.
- Function of short-circuit or sensor disconnection monitoring.
- Possibility to set function "heating"/"cooling" (setting is done by DIP switch).
- Adjustable hysteresis (sensitivity), switching by potentiometer in range 0.5 to 5 °C / 0.9 to 9 °F
- Choice of external temperature sensors with double insulation in standard lengths 3, 6 and 12 m (9.8',19.7' and 39.4').
- It is possible to place sensor directly on terminal block - for temperature monitoring in a switchboard or in its surroundings.
- Multivoltage supply AC/DC 24 -240 V, not galvanically separated.
- Output contact 1x NO - SPST 16 A /250 V AC1.
- Red LED indicates status of output, green LED indicates energization of the device.
- 1-MODULE, DIN rail mounting.

Description

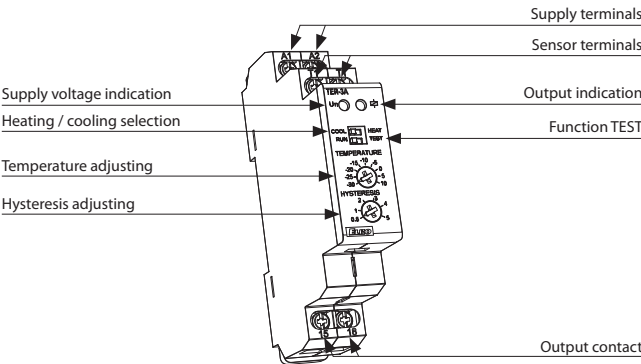


Function

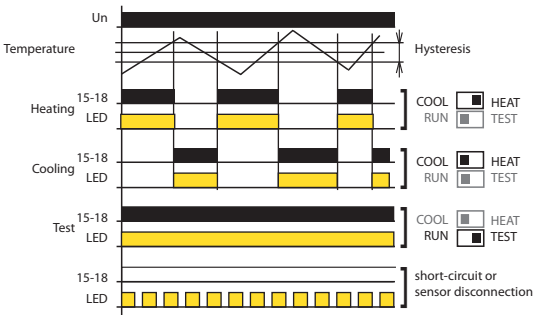

It is a single but practical thermostat with separated sensor for monitoring temperature. Device is placed in a switchboard and external sensor senses temperature of required space, object, or liquid. Supply is not galvanically separated from sensor. Sensor is double insulated. Maximal length of delivered sensor is 12 m / 39.4'. device has in-built indication of sensor damage, which means that in case of short-circuit or disconnection red LED flashes. Thanks to adjustable hysteresis, it is advantageous to regulate width of the range and thus define sensitivity of load switching. Sensed temperature is decreased by set hysteresis. When installing it is necessary to keep in mind that hysteresis is increased by temperature gradient between sensor's jacket and thermistor.

Connection

Symbol

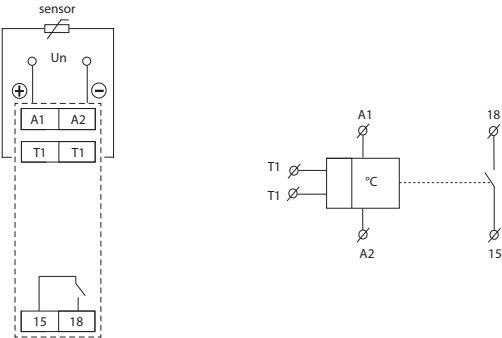





EAN code  
TER-3E: 8595188138437  
TER-3F: 8595188138444


Technical parameters	TER-3E	TER-3F
Function:	single level	
Supply terminals:	A1-A2	
Voltage range:	AC /DC 24 - 240 V (AC 50 - 60 Hz)	
Burden:	2 VA	
Operating range:	- 15 %; +10 %	
Measuring circuit		
Measuring terminals:	T1 - T1	x
Temperature range:	0 to +60 °C / (32 °F to 140 °F)	
Hysteresis:	fixed 1 °C / (1.8 °F)	
Sensor:	thermistor NTC	in-built
Sensor fault indic. (short-circuit / disconnection):	flashing red LED	
Accuracy		
Setting accuracy (mech.):	5 %	
Switching difference:	0.5 °C (0.9 °F)	
Temperature dependance:	< 0.1 % / °C (°F)	
Output		
Number of contacts:	1x NO- SPST (AgSnO <sub>2</sub> )	
Current rating:	16A / AC1,10 A / 24 V DC	
Breaking capacity:	4000 VA / AC1, 300 W / DC	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	2.5 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4 with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	73 g (2.58 oz.)	74 g (2.61 oz.)
Standards:	EN 60730-2-9, EN 61010-1	

#### Example of an order


Please specify a type of thermostat in your order (TER-3E , TER-3F).

- Single thermostat for temperature monitoring and regulation in range 0 to +60 °C (32 °F to 140 °F).
- It can be used for temperature monitoring e.g. in switchboards, heating systems, liquids, radiators, motors, devices, open spaces, etc.
- Fixed hysteresis at 1 °C / (1.8 °F).
- TER-3E: choice of external temperature sensors with double insulation in standard lengths 3 (9.8'), 6 (19.7') and 12 m (39.4').
- TER-3F: sensor is a part of device, serves for monitoring temperature in a switchboard.
- Supply voltage AC /DC 24 - 240 V.
- Output contact 1x NO- SPST 16 A / 250 V AC1.
- Output status is indicated by red LED.
- 1-MODULE, DIN rail mounting.

#### Description

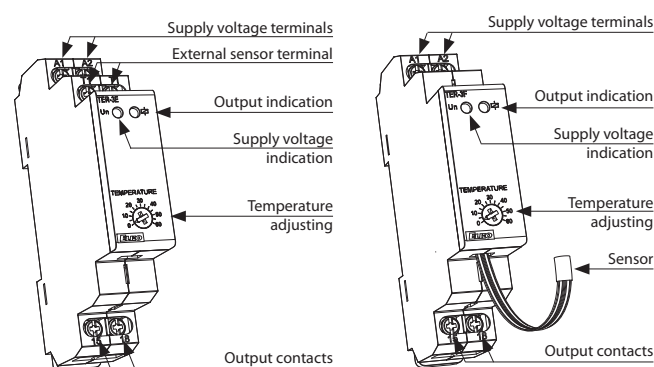


#### Function

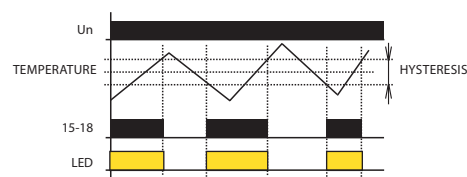

It is a single thermostat for temperature monitoring with separated sensor (except for TER-3F). Device is located in a switchboard and external sensor senses temperature of required space, object or liquid. Supply is not galvanically separated from sensor but sensor is double insulated. Maximal length of sensor cable is 12 m (39.4'). Temperature sensing is decreased by set hysteresis. When installing it is necessary to keep in mind that hysteresis is increased by temperature gradient between sensor's jacket and thermistor.

#### Connection

#### Symbol

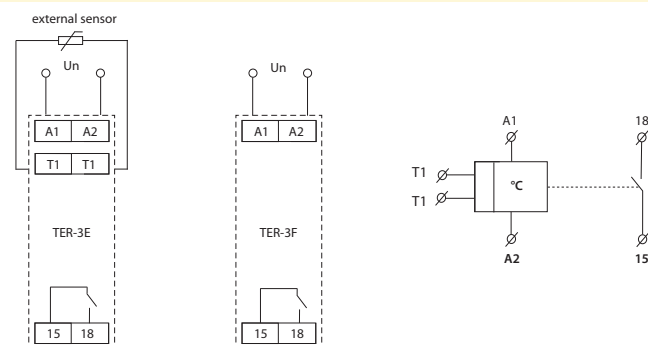




EAN code  
 TER-4 / 230V: 8594030337806  
 TER-4 / 24V: 8594030338148


- Double thermostat for temperature monitoring and regulation over a wide range of temperatures
- Temperature range switch and fine temperature setting for each thermostat
- Usable for temperature monitoring in switchboards, heating or cooling systems, motors, liquids, open spaces, etc.
- Galvanically isolated power supply AC 230V or AC / DC 24V
- 2 inputs for temperature sensors NTC 12k / 25 ° C
- Setting independent or dependent thermostat function (see function description)
- Short-circuit monitoring or sensor interruption
- Heating / cooling function selection
- Adjustable switching hysteresis (sensitivity)
- Two output relays (for each level independent)
- Output contact 2x changeover 16A / 250V AC1
- Output status indication and LED sensor fault indication
- 3-MODULE, DIN rail mounting

Technical parameters		TER-4
Function:	double thermostat	
Supply terminals:	A1-A2	
Voltage range:	AC 230 V (AC 50-60 Hz), AC/DC 24V galvanically separated	
Burden max.:	2.5 W / 5 VA (AC 230 V), 1.4 W / 2 VA (AC/DC 24 V)	
Supply voltage tolerance:	- 15 %; + 10 %	
Measuring circuit		
Measuring terminals:	T1-T1 and T2-T2	
Temperature ranges (set via switch individually for each level):	-40 .. -25 °C (-458 .. -13 °F)	+35.. +50 °C (95 .. 122 °F)
	-25 .. -10 °C (-13 .. 14 °F)	+50.. +65 °C (122 .. 149 °F)
	-10 .. +5 °C (14 .. 41 °F)	+65.. +80 °C (149 .. 176 °F)
	+ 5 .. +20 °C (41 .. 68 °F)	+80.. +95 °C (176 .. 203 °F)
	+20 .. +35 °C (68 .. 95 °F)	+95.. +110 °C (203 .. 230 °F)
Fine temperature setting:	0-15 °C, in selected range	
Hysteresis for T1:	adjustable, 0.5 or 2.5 °C / 0.9 or 4.5 °F (DIP switch)	
Hysteresis for T2:	adjustable, 0.5 or 2.5 °C / 0.9 or 4.5 °F (DIP switch)	
Sensor:	thermistor NTC 12 kΩ / 25 °C (77 °F)	
Sensor failure indication:	yellow LED + Red LED flashes	
Accuracy		
Setting accuracy (mech.):	5 %	
Temperature dependance:	< 0.1 % / °C (°F)	
Output		
Number of contacts:	2x changeover/ SPDT (AgNI / Silver Alloy)	
Current rating:	16A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 52 x 65 mm (3.5" x 2" x 2.6")	
Weight:	8.9 oz (251 g) (230 V), 5.4 oz (152 g) (24 V)	
Standards:	EN 60730-2-9, EN 61010-1	


Description

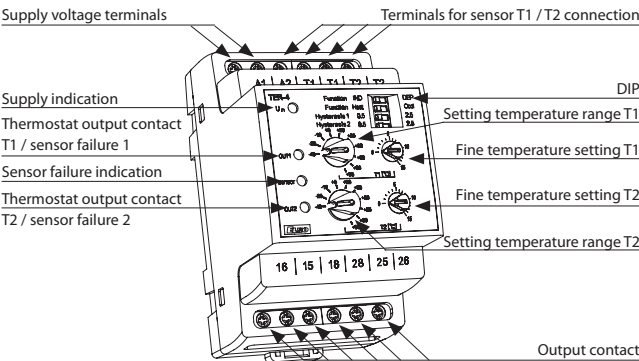


Description and importance of DIP switches

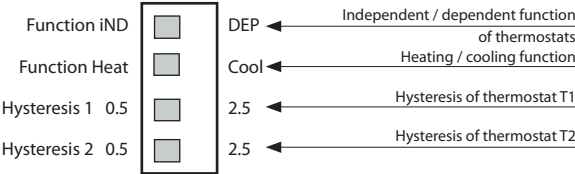

Connection



Symbol



Function



Each thermostat has its own temperature sensor, coarse and fine temperature setting, hysteresis setting and its output relay.  
The set temperature is set as the sum of the selected temperature range and fine temperature setting.  
Example: Required temperature ... + 25 °C  
Set range ... + 20 °C  
Fine setting ..... 5 °C

The device monitors the failure status of each sensor (short circuit or interruption) - if the sensor fails, the yellow LED is lit and the corresponding red LED flashes. The relevant relay is disconnected when it fails.

The device can also be operated as a single thermostat (single sensor). In this case, a 10kΩ resistor (part of the product package) must be connected to the unused input.

Independent thermostat function  
The device acts as 2 single simple thermostats

Dependent function of thermostats  
The thermostats are connected "in series" - i.e. the thermostat 1 is blocked by thermostat 2. This can be used, for example, when thermostat 1 is operational and the thermostat 2 is blocked (emergency - for example, when overheating the device).

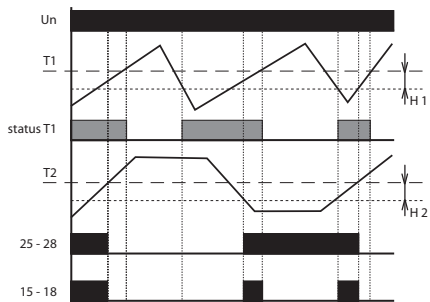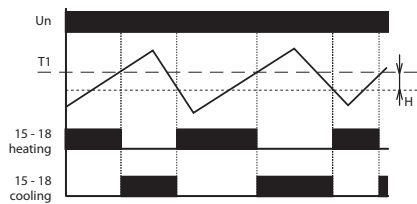





EAN code  
TER-9 /230V: 8595188124478  
TER-9 /24V: 8595188129190

- Digital thermostat with 6 functions and built-in time switch clock with day, week and year program. You can also limit temperature functions and courses this way in real time.
- Complex control of home and water heating, solar heating, etc.
- Two thermostats in one, two temperature inputs, two outputs with dry contact.
- Maximum universal and variable thermostat including all ordinary thermostat functions.
- Functions: two independent thermostats, dependent thermostat, differential thermostat, two level thermostat, zone-based thermostat, dead zone thermostat.
- Program setting of output functions, calibration of sensors according to reference temperature (offset).
- The thermostat is subject to the digital clock programs.
- Wide operating range of temperature settings, the possibility of measuring in °C and °F.
- Clear display of set and measured data on a backlit LCD.
- Power supply: AC 230 V or 24 V AC/DC (based on type of device).
- The time switch clock has a battery backup, which retains data in case of a power outage (reserve backup time - up to 3 years).
- Easy replacement of the backup battery through the plug-in module, no disassembling is required.
- Output contact 1x changeover / SPDT 8 A / 250 V AC1 for each output.
- 2-MODULE, DIN rail mounting.

Device description

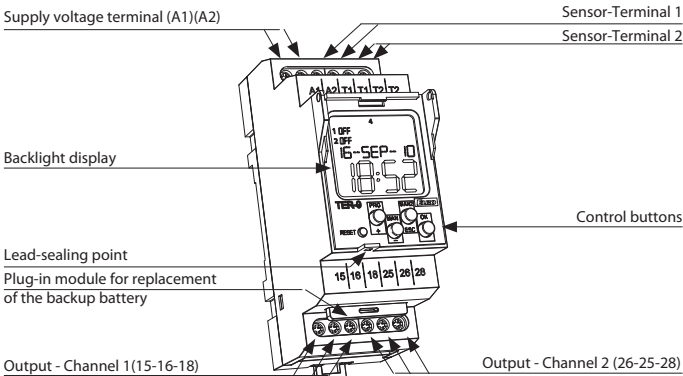


Description of visual elements on the display

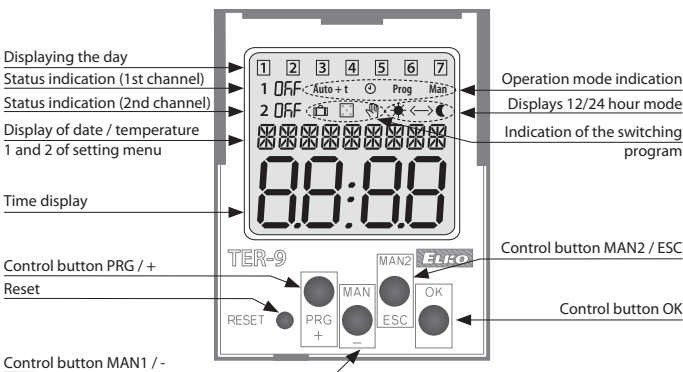

Connection


Symbol

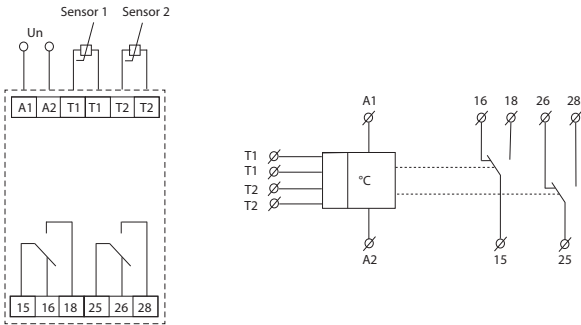


Technical parameters		TER-9
Supply		
Number of function:	6	
Supply terminals:	A1 - A2	
Voltage range:	AC 230 V (AC 50 - 60 Hz) galvanically separated, AC/DC 24V galvanically unseparated	
Burden:	max. 4 VA	
Operating range:	-15 %; +10 %	
Type backup battery:	CR 2032 (3V)	
Measuring circuit		
Measuring terminals:	T1-T1 and T2-T2	
Temperature range:	-40.. +110 °C (-40.. +230 °F)	
Hysteresis (sensitivity):	in an adjustable range 0.5.. 5 °C (0.9.. 9 °F)	
Diference temperature:	adjustable 1.. 50 °C (34..122 °F)	
Sensor:	thermistor NTC 12 kΩ at 25 °C (77 °F)	
Sensor failure indication:	displayed on the LCD	
Accuracy		
Measuring accuracy:	5 %	
Repeat accuracy:	< 0.5 °C (0.9 °F)	
Temperature dependance:	< 0.1 % / °C (°F)	
Output		
Number of contacts:	1x changeover for each output / SPDT, (AgNi)	
Current rating:	8 A / AC1	
Max. breaking capacity:	2000 VA / AC1, 240 W / DC	
Switching voltage:	250 V AC1 / 30 V DC	
Output indication:	symbol ON/OFF	
Mechanical life:	1x10 <sup>7</sup>	
Electrical life (AC1):	1x10 <sup>5</sup>	
Time circuit		
Power back-up:	up to 3 year	
Accuracy:	max. ±1 s per day, at 23°C (73.4 °F)	
Min. switching interval:	1 min	
Data stored for:	min. 10 years	
Program circuit		
Number of memory places:	100	
Program:	daily, weekly, yearly	
Data readout:	LCD display, with back light	
Other information		
Operating temperature:	-10 °C to 55 °C (14 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (power supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP20 terminals, IP40 from front panel	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max.1x 2.5 or 2x1.5 / with sleeve max. 1x2.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5 x 1.4 x 2.5")	
Weight:	(230 V) 127 g (4.4 oz.)	(24 V) 120 g (4.2 oz.)
Standards:	EN 61812-1; EN 61010-1; EN 60730-2-9; EN 60730-1; EN 60730-2-7	

## 1.2 independent single-stage thermostats

Heating functions



Heating functions




**Legend:**

Ts1 - real (measured) temperature 1  
Ts2 - real (measured) temperature 2  
T1 - adjusted temperature T1  
T2 - adjusted temperature T2  
H1 - adjusted hysteresis for T1  
H2 - adjusted hysteresis for T2  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
15-18 output contact (for T1)  
25-28 output contact (for T2)

Classic function of thermostat, output contact switched until adjusted temperature is reached. Hysteresis eliminates frequent switching - output oscillation.

## 2. Depending functions of 2 thermostats

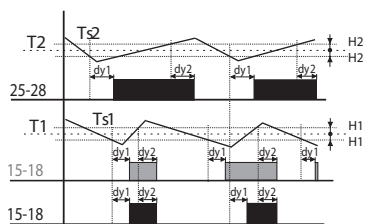


**Legend:**

Ts1 - real (measured) temperature 1  
Ts2 - real (measured) temperature 2  
T1 - adjusted temperature T1  
T2 - adjusted temperature T2  
H1 - adjusted hysteresis for T1  
H2 - adjusted hysteresis for T2  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
25-28 output contact (for T2)  
15-18 output contact (intersection T1 and T2)

Output 15-18 is closed, if temperature of both thermostats is below an adjusted level. When any thermostat reaches adjusted level, the contact 15-18 opens.

Serial inner connection of thermostats (logic function AND).

## 3. Differential thermostat

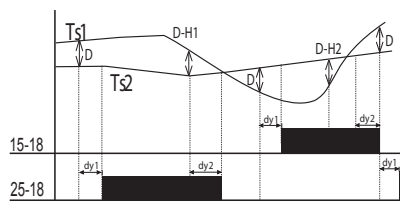


**Legend:**

Ts1 - real (measured) temperature T1  
Ts2 - real (measured) temperature T2  
D - adjusted difference  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
15-18 output contact (for T1)  
25-28 output contact (for T2)

Switching of output corresponds with input, which has lower temperatures when difference is exceeded.

Differential thermostat is used for keeping two identical temperature e.g. in heating systems (boiler and reservoir), solar systems (collector - reservoir, exchanger), water heating (water heater, water distribution) etc.

## 4. 2-stage thermostat

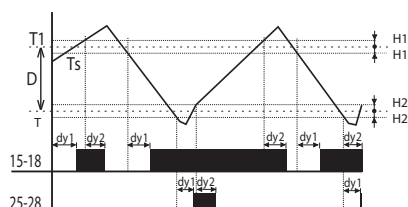


**Legend:**

Ts - real (measured) temperature  
T1 - adjusted temperature  
 $T = T1 - D$   
D - adjusted difference  
H1 - adjusted hysteresis for T1  
H2 - adjusted hysteresis for T  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
15-18 output contact  
25-28 output contact

Typical example of use for two-stage thermostat is e.g. in boiler-room, where there are two boilers from which one is main and the other one is auxiliary. The main boiler is managed according to set temperature and auxiliary boiler is switched in case temperature falls under set difference. Thus it helps to the main boiler in case outside temperature dramatically falls.

In the range of set difference (D) output 15-18 functions as normal thermostat to input 1 (type 1). In case temperature falls under set difference, second output switches too.

## 5. Thermostat with "WINDOW"

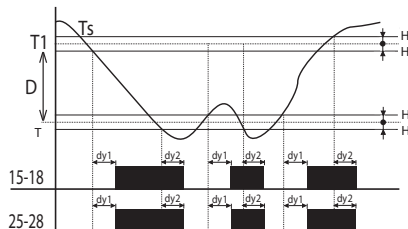


**Legend:**

Ts - real (measured) temperature  
T1 - adjusted temperature  
 $T = T1 - D$   
H1 - adjusted hysteresis for T1  
H2 - adjusted hysteresis for T  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
15-18 output contact  
25-28 output contact

Output is closed (heating) only if temperature is within adjusted range. If temperature is out of range, the contact opens. T is set as T1-D.

The function is used for protection of gutters against freezing.

## 6. Thermostat with dead zone

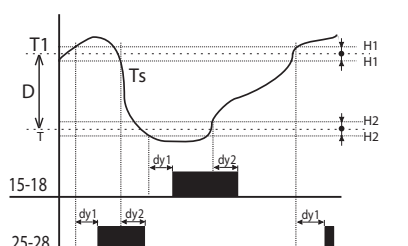

**Legend:**

Ts - real (measured) temperature  
T1 - adjusted temperature  
 $T = T1 - D$   
H1 - adjusted hysteresis for T1  
H2 - adjusted hysteresis for T  
dy1 - set switching delay of the output  
dy2 - set delay on output breaking  
15-18 output contact (heating)  
25-28 output contact (cooling)

In case of thermostat with a „dead zone“, it is possible to set temperature T1 and a difference (respectively a width of dead zone D). If temperature is higher than T1, output contact of cooling switches ON; if the temperature gets below T1, the contact switches OFF.

If the temperature gets below temperature T, the contact of heating switches ON and it switches OFF when temperature T is exceeded. This function can be used for example for automatic air warming and cooling in ventilation so the sit is always within the range T1 and T.



EAN code  
TER-7: 8595188137164

Technical parameters		TER-7
Function:	monitoring temperature of motor winding	
Supply terminals:	A1-A2	
Voltage range:	AC/ DC 24 - 240 V (AC 50 - 60 Hz)	
Burden:	max. 2 VA	
Operating range:	-15 %; +10 %	
Measuring circuit		
Measuring terminals:	Ta-Tb	
Cold sensor resistance:	50 Ω - 1.5 kΩ	
Upper level:	3.3 kΩ	
Bottom level:	1.8 kΩ	
Sensor:	PTC temperature of motor winding	
Sensor failure indication:	blinking red LED	
Accuracy		
Accuracy in repetition:	< 5 %	
Switching difference:	± 5 %	
Temperature dependance:	< 0.1 % / °C	
Output		
Number of contacts:	2x changeover / DPDT (AgNi / Silver Alloy)	
Current rating:	8 A / AC1	
Breaking capacity:	2000 VA / AC1, 192 W / DC	
Inrush current:	10 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (resistive):	0.7x10 <sup>5</sup>	
Other information		
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	83 g (2.9 oz.)	
Standards:	EN 60730-2-9, EN 61010-1	


Note

Sensors could be in series in abide with conditions in technical specification - switching limits.


Warning:  
In case of supply from the main, neutral wire must be connected to terminal A2!

- It monitors motor coil temperature.
- Fixed levels of switching.
- PTC sensor is used for sensing, it is in-built in motor winding by its manufacturer or there is used an external PTC sensor.
- MEMORY function - relay is blocked in an error state until until operator intervention (press RESET button).
- RESET of faulty state:
  - a) button on the front panel
  - b) by external contact (remote by two wires).
- Function of short-circuit or sensor disconnection monitoring, red LED flashing indicates faulty sensor.
- Output contact: 2x changeover / DPDT 8 A / 250 V AC1.
- Red LED shines and indicates exceeded temperature.
- Terminals of sensor are galvanically separated, they can be shorted out by terminal PE without damaging the device.
- Multivoltage supply AC/DC 24 - 240 V.
- 1-MODULE, DIN rail mounting.

Description

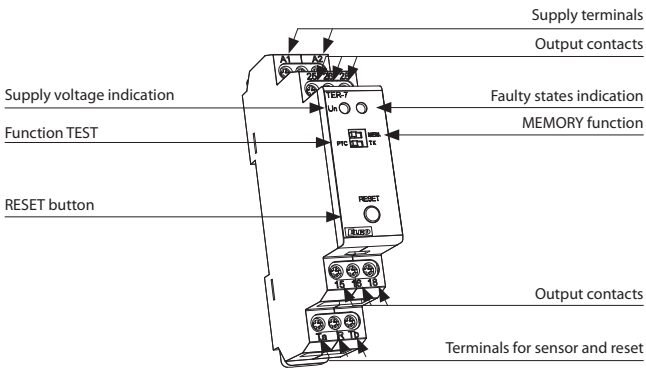



Function

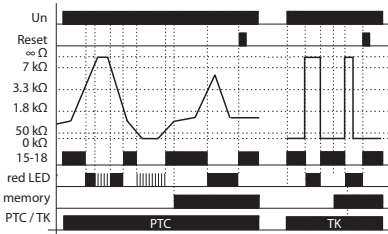

The device controls temperature of motor winding with PTC thermistor which is mostly placed in motor winding or very close to it. Resistance of PTC thermistor run to max 1.5 kΩ in cold stage. By temperature increase the resistance goes strongly up and by overrun the limit of 3.3 kΩ the contact of output relay switch off - mostly contactor controlling a motor. By temperature decrease and thereby decrease of thermistor resistance under 1.8 kΩ the output contact of relay again switches on. The relay has function "Control of sensor fault". This controls interruption or disconnection of sensor. When switch is in position "TK" monitoring of faulty sensor is not functional - it is possible to connect bimetal sensor with only 2 states: ON or OFF. The device can work with bi-metal sensor in this position. Other safety unit is function "Memory". By temperature overrun (and output switches off) the output is hold in faulty stage until service hit. This bring the relay to normal stage (with RESET button) on front panel or by external contact (remote).

Connection

Symbol

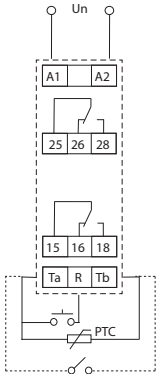





EAN code - DEVICE:  
ATR: 8595188125000  
ATF: 8595188130165  
ATC: 8595188130172

EAN code - SET:  
ATR, white frame Elegant: 8595188136228  
ATF, white frame Elegant, termosensor TC-3m: 8595188135870  
ATC, white frame Elegant, termosensor TC-3m: 8595188135887


To devices is necessary to order additionally - frame in design ELEGANT and external sensor (except ATR)

Technical parameters	ATR	ATF	ATC
Supply			
Power supply and tolerance:	AC 230 V ± 10 %		
Consumption, frequency:	6.5 VA/ 50 - 60 Hz		
Measuring			
Temperature range:	5 to 40 °C (41 °F to 104 °F)	5 to 50 °C (41 °F to 122 °F)	
Accuracy:	± 2 °C / 36 °F		
Hysteresis:	± 1 °C / 34 °F		
Temperature sensor:	room	floor	room + floor
Night decline:	adj. ± 7 °C / 45 °F	adj. ± 10 °C / 50 °F	fix - 5 °C / 41 °F
Offset / calibration:	adj. ± 7 °C / 45 °F	adj. ± 10 °C / 50 °F	
Setting			
Room temperature setting:	main knob	x	main knob
Floor temperature setting:	x	main knob	auxiliary button 2
Offset setting:	auxiliary button 1		
Night decline setting:	auxiliary button 2		x
Night decline switching:	internal / external	internal pushbutton	
Display			
Power supply indication:	green LED 1		
Output ON indication:	red LED 1		
Night decline indication:	red / orange LED 2	red LED 2	
Indication of faulty floor sensor:	x	LED 1 flashing	
Indication- exceeded temp. / ext. sensor:	x		LED 1 flashing
Output			
Type:	potential-free contact NO-SPST, material of contact - AgNi		
Max. loadability:	16 A / 250 V, 4000 VA for AC1		
Contact separation:	galvanic		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life (AC1):	0.7x10 <sup>5</sup>		
Other information			
Operating temperature:	-10 °C to 55 °C (14 °F to 131 °F)		
Storage temperature:	-20 °C to 70 °C (-4 °F to 158 °F)		
Electrical strength:	4 kV		
Mounting:	installation box with min. depth 30 mm / 1.18", Ø min. 65 mm / 2.6"		
Protection degree:	IP30 in standard conditions*		
Max. cable size (mm <sup>2</sup> ):	solid wire 1x 2.5 / 1.5 with sleeve (AWG 12)		
Dimensions:	84 x 89 x 56.4 mm (3.3" x 3.5" x 2.22" )		
Weight:	110 g (3.9 oz.)		
Standards:	EN 60730-2-9, EN 61010-1		


\* see page 41

- **ATR - Analog Thermo Room:**
  - Room thermostat with temperature range 5 to 40 °C (41 °F to 104 °F) with a built-in sensor.
- **ATF - Analog Thermo Floor:**
  - Floor thermostat with temperature range 5 to 50 °C (41 °F to 122 °F) with external sensor.
  - Function „temporary temperature change“ in range  $\pm$ 10 °C (50 °F) (decreasing / increasing temperature).
- **ATC - Analog Thermo Combined:**
  - Room and floor thermostat, sensors are connected in series and block each other.
  - Function „temporary temperature change“ fix -5 °C / 23 °F (night decline).
  - Temperature range 5 to 50 °C (41 °F to 122 °F) for both sensors, adjustable separately.
  - It is possible to use it without external sensor.
- **ATR, ATF, ATC**
  - Night decline is activated by a pushbutton on device or external contact (only ATR).
  - Night decline setting is done by an auxiliary button 2 (under main button, only ATR/ATF).
  - Offset setting (calibration  $\pm$  10 °C / 50 °F) with „known“ thermometer.
  - External sensor (TC-3. 3 m / 9.84') is a part of delivery (only ATF/ATC), it is possible to extend its length up to 100 m (328').
  - Design ELEGANT, wide range of colors, possibility to combine more frames together.

### Description

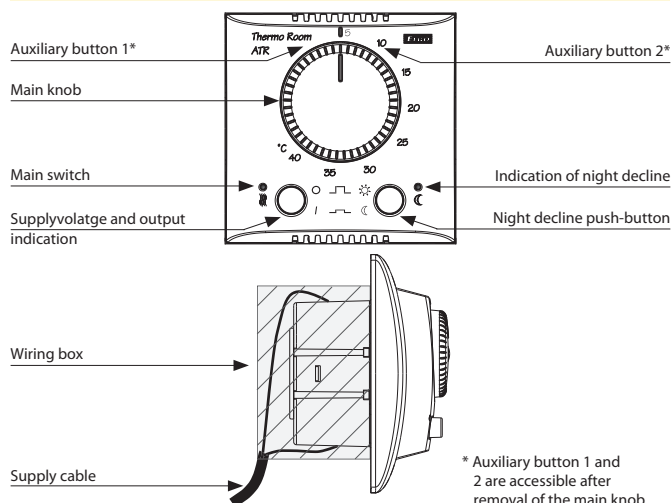

### Connection

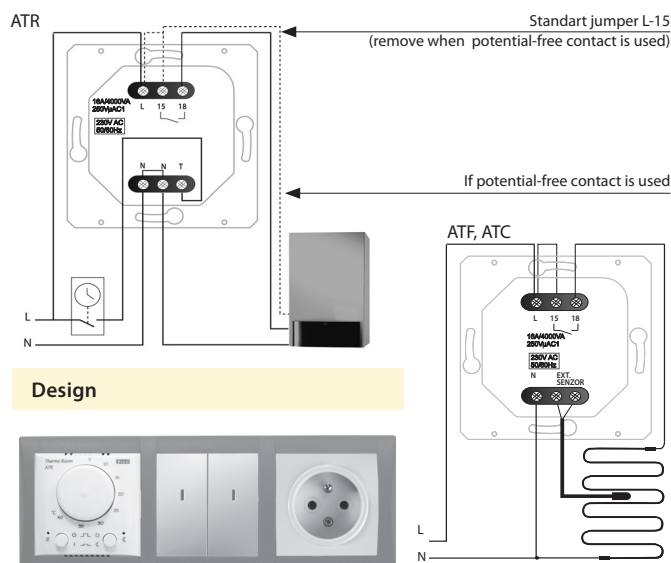

### Design




Complete offer of switching devices line ELEGANT can be found in an individual catalogue ELEGANT Home switches, which can be sent to you upon request.



EAN code - DEVICE:  
DTR: 8595188125017  
DTF: 8595188135924  
DTC: 8595188135931  
To devices is necessary to order additionally - frame in design ELEGANT and external sensor (except DTR)

EAN code - SET:  
DTR, white frame Elegant: 8595188136235  
DTF, white frame Elegant, termosensor TC-3m: 8595188135863  
DTC, white frame Elegant, termosensor TC-3m: 8595188135856

Technical parameters	DTR	DTF	DTC
Supply			
Power supply and tolerance:	AC 230 V ± 15 %,		
Consumption, frequency:	1.5 VA, 50 - 60 Hz		
Backup:	rechargeable accumulator LIR2032 (40 mAh) charging time from 0 to 100 %: 3 hours backup time when capacity is 100 %: 72 hours		
Measuring			
Temperature range:	5 to 50 °C (41 to 122 °F)		
Accuracy:	± 0.5 °C (± 32.9 °F)		
Hysteresis:	adjustable 0.5 °C or 1 °C (32.9 or 33.8 °F)		
Temperature sensor:	room (internal)	floor (external)	room (internal) and floor (external)
Adjusting			
Min. temperature cycle:	0.5 °C (32.9 °F)		
Min. time cycle:	10 min.		
Number of programs:	4; pre- set program 1		
Number of events:	2 - 6 in a program		
Offset / calibration:	adjustable ± 0.5 °C (32.9 °F)		
Display			
LCD display:	26 x 24 mm, with backlight (ON or OFF permanently)		
Displaying date:	current time, set / current temperature, day in a week, output status		
Output indication:	red LED and symbol  on LCD		
Output			
Type:	potential-free contact NO - SPST, material of contact - AgNi (Silver Allow)		
Max. loadability:	16 A / 250 V, 4000 VA by AC1		
Contact separation:	galvanic, electrical strength 4 kV		
Mechanical life:	3x10 <sup>7</sup>		
Electrical life:	0.7x10 <sup>5</sup>		
Other information			
Operating position:	-10 °C to 55 °C (14 °F to 131 °F)		
Storing position:	-20 °C to 70 °C (-4 °F to 158 °F)		
Electical strenght:	4 kV		
Mounting:	wiring box with min. depth 30 mm / 1.18 " , Ø min. 65 mm / 2.6 "		
Protection degree:	IP30 in standard conditions*		
Max. cable size (mm <sup>2</sup> ):	solid wire 1x 2.5 / 1.5 with sleeve (AWG 12)		
Dimensions:	84 x 89 x 54.3 mm (3.3 " x 3.5 " x 2.14 " )		
Weight:	120 g (0.26 oz.)		
Standards:	EN 60730-2-9, EN 61812-1, EN 61010-1		

\* see page 41


Design




Complete offer of switching devices line ELEGANT can be found in an individual catalogue ELEGANT Home switches, which can be sent to you upon request.

- **DTR - Digital Thermo Room:**
  - Room thermostat with temperature range 5 to 50 °C (41°F to 122 °F) with a built-in sensor.
- **DTF - Digital Thermo Floor:**
  - Floor thermostat with temperature range 5 to 50 °C (41 °F to 122 °F) with external sensor.
- **DTC - Digital Thermo Combined:**
  - Combined thermostat with room and floor sensors and temperature range 5 to 50 °C (41 °F to 122 °F).
  - Choice of temperature display from internal or external sensors.
  - By program it is possible to choose, which sensor is active and if it should function in serial or in parallel.
- **DTF, DTC**
  - External sensor (TC-3, 3m) is a part of delivery (only ATF/ATC), it is possible to extend its length up to 100 m (328').
  - Monitoring of disconnection or short-circuit of external sensor, fault is displayed.

Description

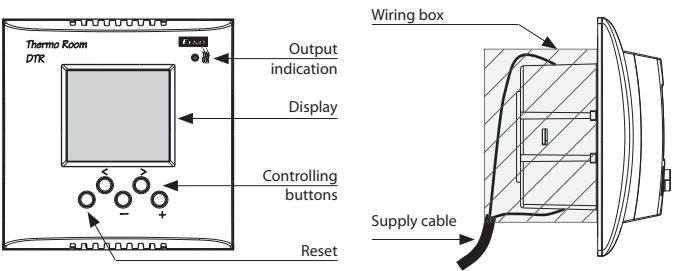


Description of visual elements on the display

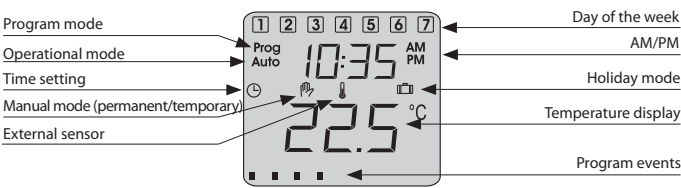

Other functions of DTR, DTF, DTC

- rechargeable backup battery in case of power failure (e.g. the high tariff of electric heating)
- push-button lock to prevent unwanted manipulation with thermostat
- the possibility of display settings - current or set temperature
- „freezing protection“ in case temperature drops below 5 °C (41 °F) thermostat always switches heating on
- choice of function heating or cooling
- easy and intuitive control by four push-buttons
- automatic shift summer / winter time
- holiday mode - it is possible to set temperature and time from 1 hour to 99 days without any intervention into program settings or turning heating off (suitable in case of planned absence holiday...)
- wall switch buttons in ELEGANT design, wide variety of colors and combination of multiframes

Connection

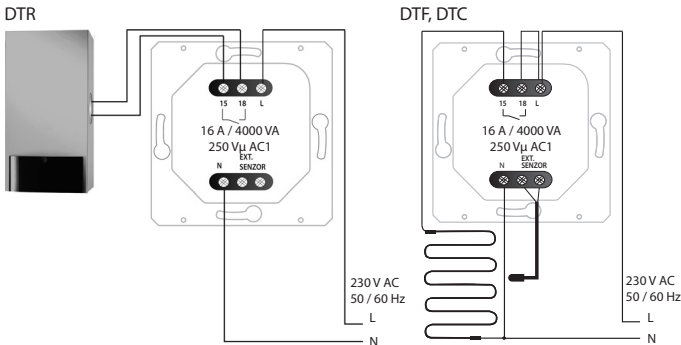




EAN code  
ATV-1: 8595188160889  
USB programming  
adapter: 8595188160995


Technical parameters	ATV-1
Operating voltage:	3 V / DC (2 AA batteries 1.5 V / DC AA)
Temperature range:	8 to 28 °C (46 to 82 °F)
Color:	white
Dimensions (L x W x H):	76.5 x 53.5 x 63 mm (3" x 2.1" x 2.4")
Design:	thermostatic direction valves, electronic

#### Examples of daily heating program

##### BATHROOM

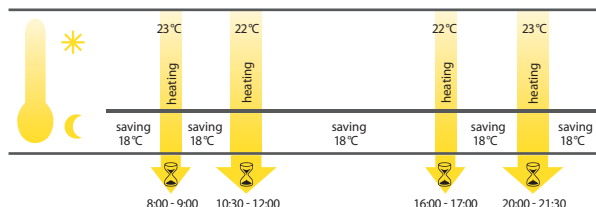

##### LIVING ROOM

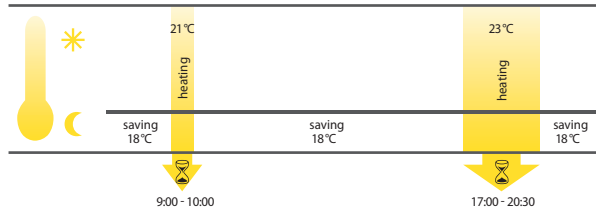


#### Adapters

Type of valve	Type of adapter
Heimeier, Junkers Landys+Gyr, MNG, Honeywell, Braukmann thread size M 30x1.5	No adapter necessary + enclosed pin; only for RAV
Danfoss RAV (the valve plunger must be fitted with the enclosed pin)	
Danfoss RA	
Danfoss RAVL	

- This energy-saving digital thermo-valve is a programmable regulation device for various heaters, but mainly radiators.
- It can be used to regulate temperature in closed rooms, thus helping to lower heat energy consumption.
- Functions:
  - Manual mode - measuring and checking a manually set temperature.
  - Automatic mode - control between two temperatures based on a set time program:
    - comfort temperature (factory settings 21 °C / 70 °F)
    - energy-saving temperature (factory settings 16 °C / 61 °F).
- Intervals of heating and energy-saving operation can be set using a freely adjustable time program.
  - 8 individually programmable switching times per day:
    - 4 heating intervals
    - 4 energy-saving intervals.
- The device features very quiet operation and long battery life (up to 5 years).
- Quick and easy installation.

#### Description of device

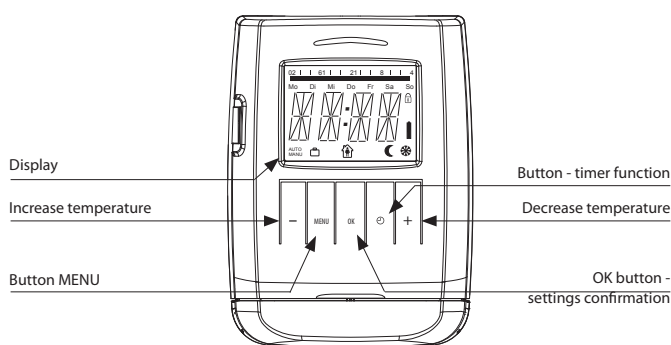

#### Other functions

1. Time function - the desired temperature can be set for a certain adjustable time interval.
2. Vacation function - while you're gone, you can set and maintain the desired temperature.
3. Open window function - when the temperature drops, the heating valve automatically closes in order to save energy.
4. Child safety block - blocking against undesired interference with the thermostat.
5. Freeze protection - if the temperature drops below 6 °C (43 °F), the valve opens until the temperature again exceeds 8 °C (46 °F). This keeps heaters from freezing.

#### Adjustment ATV-1

- manual
- via USB programming adapter PROGmatic

Using the programming port, in seconds your settings will be transferred into the thermostat.






EAN code  
TEV-1: 8595188129121


Technical parameters		TEV-1
Function:	two-level thermostat	
Supply terminals:	L - N	
Voltage range:	230 V AC / 50 - 60 Hz	
Input:	max. 2.5 VA	
Tolerance of voltage range:	±15 %	
Measuring circuit		
Measuring terminals:	T - T	
Temperature ranges		
thermostat 1:	-20 to 20 °C (-4 °F to 68 °F)	
thermostat 2:	-20 to 20 °C (-4 °F to 68 °F)	
Hysteresis (sensitivity):	3°C (± 1.5 °C) / 37.4 °F (± 34.7 °F)	
Sensor:	thermistor NTC 12 kΩ / 25 °C (77 °F )	
Faulty sensor indication:	red LED flashing	
Accuracy		
Accuracy of settings (mech.):	5 %	
Dependance on temperature:	< 0.1 % / °C (°F)	
Output		
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	16 A / AC1	
Max. breaking capacity:	4000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switched voltage:	250 V AC1	
Output indication:	LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life:	0.7x10 <sup>5</sup>	
Other information		
Operation temperature:	-30 °C to 50 °C (-22 °F to 140 °F)	
Operation position:	any	
Protection degree:	IP65	
Overvoltage category:	III.	
Pollution level:	2	
Max. cable size (mm²):	solid wire 2.5 / with sleeve 1.5 (AWG 12)	
Dimensions:	110 x 135 x 66 mm (4.33 "x 5.3 "x 6.6 ")	
Weight:	238 g (8.4 oz.)	
Standards:	EN 60730-2-9, EN 61010-1	

Connection

Function heating




Function cooling




- Two-level thermostat with function “WINDOW” meaning that output is switched in case the measured temperature is within set range (adjustable in range -20.. +20 °C / -4 °F to +68 °F).
- Used as protection against freezing (water-shoots, pavements, drives, pipes, etc.) heating is on when temperature falls under set upper level (e.g. +5 °C / +41 °F) and off in case it falls under lower level (e.g. -10 °C / -50 °F, when heating is not able effectively operate).
- Thermostat is placed in water-proof box with IP65, which allows installation outside, with in-built sensor TZ-0.
- Thermostat status is indicated by LED (3 colors) under transparent cover.
- Function monitoring short-circuit and sensor disconnection (break).
- Output changeover contact 16 A / SPDT (AC-1).

Description

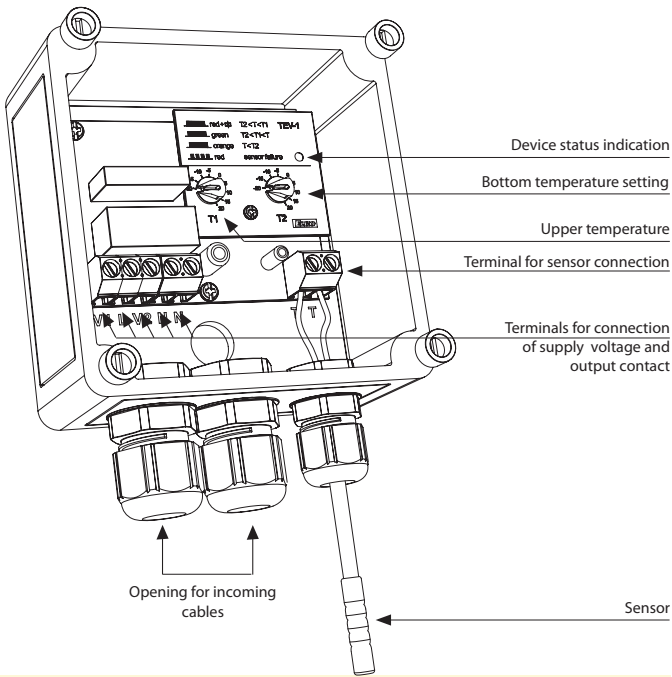



Function

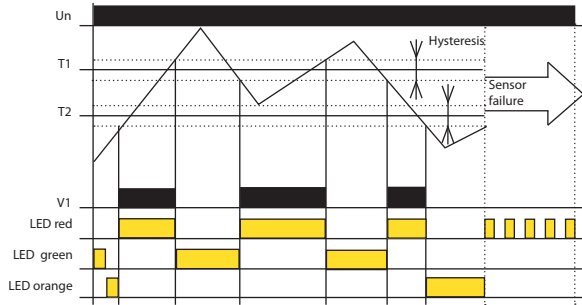

TEV-1 is a double thermostat designated for system of protection of roof water- shoots against freezing. The device is placed in a waterproof box (IP65), sensor with double insulation, which is a part of the device, senses ambient temperature. The device operates as zonal thermostat with independent setting of upper and bottom operational temperature. In case the ambient temperature is higher than T1 (upper temperature), thermostat switches heating of watershoots off (icing melts down). In case the ambient temperature is lower than T2 (bottom temperature), thermostat also switches heating off (to big freezing-heating cannot manage to melt the ice).

Symbol



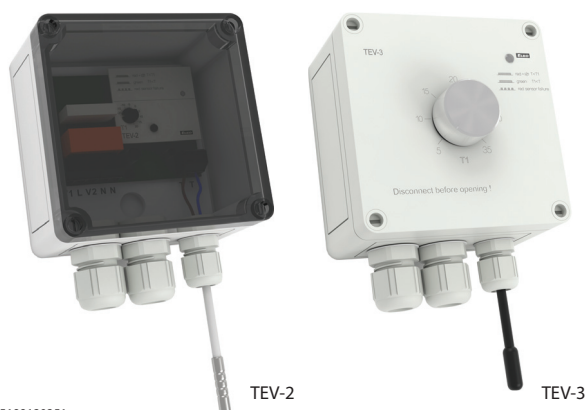


EAN code  
TEV-2: 8595188129251  
TEV-3: 8595188129268


Technical parameters	TEV-2	TEV-3
Function:	one-level thermostat	
Supply terminals:	L - N	
Voltage range:	230 V AC / 50 - 60 Hz	
Input:	max. 2.5 VA	
Tolerance of voltage range:	± 15 %	
Measuring circuit		
Measuring terminals:	T - T	
Temperature ranges:	-20 to 20 °C (-4 to 68 °F)	5 to 35 °C (41 to 95 °F)
Hysteresis (sensitivity):	3 °C (± 1.5 °C) / 37.4 °F (± 34.7 °F)	
Sensor:	thermistor NTC 12 kΩ	
Faulty sensor indication:	red LED flashing	
Accuracy		
Accuracy of settings (mech.):	5 %	
Dependance on temperature:	< 0.1 % / °C (°F)	
Output		
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)	
Current rating:	16 A / AC1	
Max. breaking capacity:	4000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switched voltage:	250 V AC1	
Output indication:	red LED	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life (AC1):	0.7x10 <sup>5</sup>	
Other information		
Operation temperature:	-30 to 50 °C (-22 °F to 122°F)	
Operation position:	any	
Protection degree:	IP65	
Overvoltage category:	III.	
Polution level:	2	
Max. cable size (mm²):	solid wire 2.5 / with sleeve 1.5 (AWG 12)	
Dimensions:	110 x 135 x 66 mm (4.33" x 5.3" x 2.3")	
Weight:	266 g (9.38 oz.)	277 g (9.77 oz.)
Standards:	EN 60730-2-9, EN 61010-1	

### Connection


#### Function heating



#### Function cooling




### Symbol




- Single thermostat with possibility of temperature management in adjustable range (it is possible to modify this range or make a special one on request).
- Used to regulate heating (or cooling) in demanding environments (outside, humidity, dustiness, etc.).
- Thermostat is placed in water-proof box with IP65 protection, which enables installation outside, with in-built sensor.
- **TEV-2:** control and indication elements are placed under transparent cover.
- **TEV-3:** control and indication elements are placed directly on the cover (for easy orientation and frequent change of temperature).
- Thermostat status is indicated by LED (2 colours).
- Function of monitoring sensor disconnection and short-circuit.
- Output 1x changeover / SPDT contact 16 A (AC-1).


### Description TEV-2 (without cover)

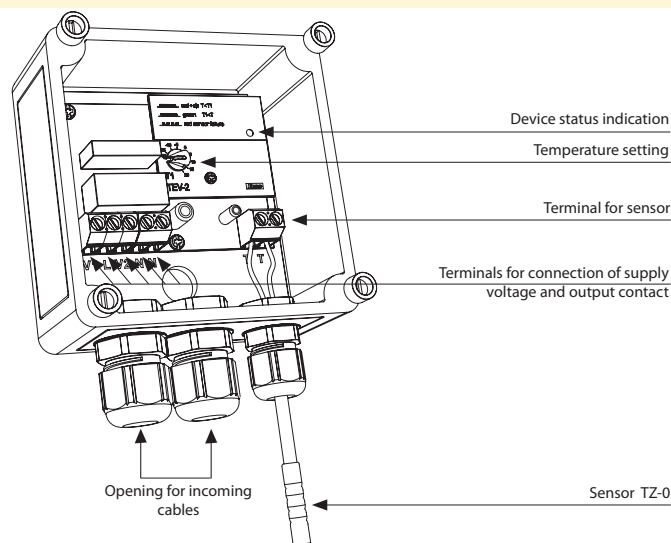

### Description TEV-3 (cover)

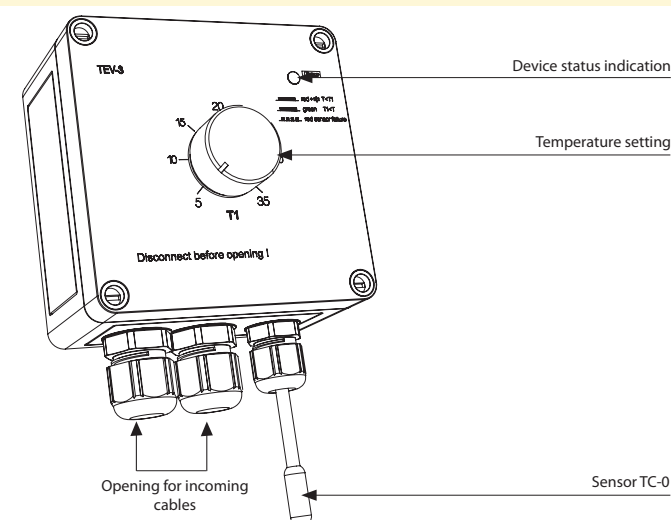

### Function TEV-2, TEV-3

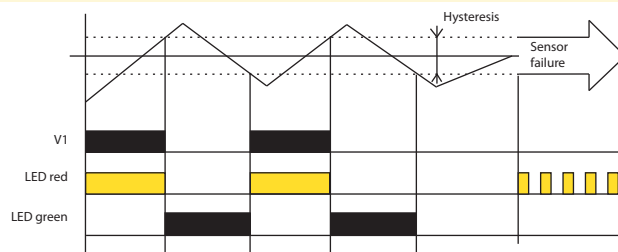

TEV-2 and TEV-3 are universal single thermostats for universal use. In case ambient temperature is higher than set temperature relay is open (function HEATING), for cooling function (opposite function) is possible to use NC contact of relay (V2).






- Single point thermostat for monitoring and regulation of temperature in demanding environments (humid and contaminated, aggressive and defective, industrial workshops, washing rooms, green-houses, cellars and cooling boxes...).
- External version in IP65, box for mounting on the wall.
- Built-in thermo-sensor is integrated in the device.
- Two functions adjustable by jumper: heating and cooling.
- 3 adjustable (by jumper) ranges of temperature, and fine adjustment through potentiometer.
- 3 adjustable (by jumper) levels of hysteresis.
- Supply voltage 230 V AC.
- Potentialless NO-SPST contact 12 A AC1 switching.

EAN code  
TEV-4: 8595188140577


Technical parameters TEV-4

<b>Supply</b>	
Supply terminals:	L - N
Voltage range:	AC 230V / 50 - 60Hz
Tolerance of voltage range:	- 15% .. +10%
Input (apparent / loss):	max. 6VA / 0.7W
<b>Function</b> setting by jumper J3	
Function - ❄️:	cooling
Function - 🔥:	heating
<b>Temperature setting</b> by jumper J2	
- range 1:	-30 °C to 0 °C (-22 °F to 32 °F)
- range 2:	0 °C to 30 °C (32 °F to 86 °F)
- range 3:	30 °C to 60 °C (86 °F to 140 °F)
Slight temperature setting:	potentiometer
<b>Hysteresis</b> 0.5 / 1.5 / 4 °C (32.9 / 34.7 / 39.2 °F)	
Hysteresis setting:	by jumper J1
<b>Output</b>	
Output contact:	1 x NO-SPST (AgSnO <sub>2</sub> )
Current rating:	12 A / AC1
Max. breaking capacity:	3000 VA / AC1, 384 W / DC
Peak current:	30 A / < 3 s
Switched voltage:	250 V AC / 24 V DC
Mechanical life:	3 x 10 <sup>7</sup>
Electrical life:	0.7 x 10 <sup>5</sup>
<b>Other information</b>	
Operation temperature:	-30 °C to 65 °C (-22 °F to 149 °F)
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4kV (supply-output)
Operation position:	sensor-side down
Protection degree:	IP65
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	max.1x 2.5, max. 2x 1.5/ with sleeve max.1x 2.5 (AWG 12)
Suggested power-supply cable:	CYKY 3x2.5 (CYKY 4x1.5)
Dimensions:	153 x 62 x 34 mm (6" x 2.4" x 1")
Weight:	148 g (5.2 oz.)
Standards:	EN 60730-2-9, EN 61010-1


Function

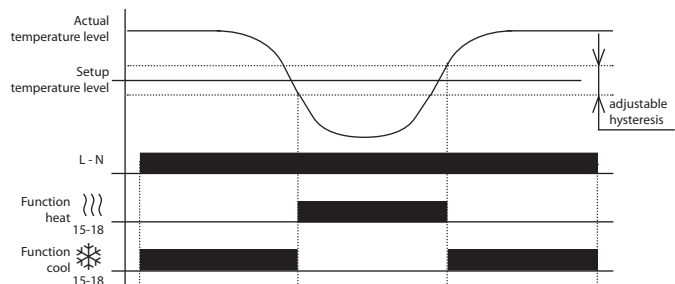

Description

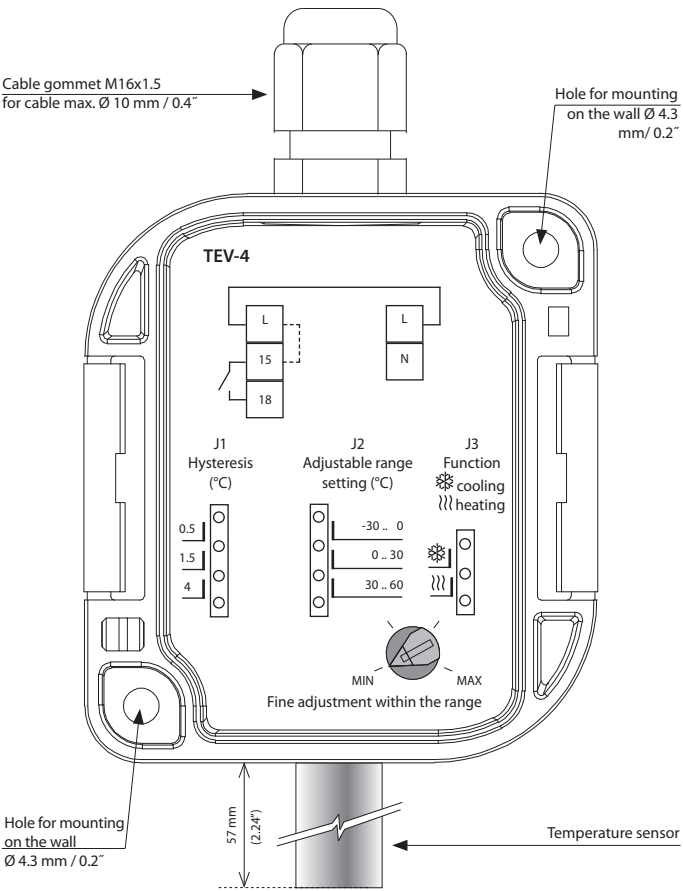

Connection

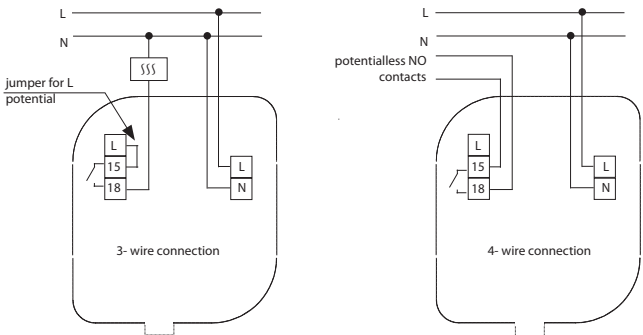

Description of function

Device is standardly supplied with jumper L-15 (3-wire connection). For the correct function of device is necessary sensor-side down device mounting.






EAN code  
RHT-1: 8595188137263

Technical parameters		RHT-1
Function:	hygro-thermostat	
Supply terminals:	A1 - A2	
Input:	1 VA	
Voltage range:	24 - 240 V AC/DC (AC 50 - 60 Hz)	
Tolerance of voltage range:	-15 %; +10 %	
Measuring circuit		
Temperature range:	0 °C to 60 °C (32 °F to 140 °F)	
Humidity range:	50.. 90 %	
Temperature hysteresis:	2.5 °C (4.5 °F)	
Humidity hysteresis:	4 %	
Sensor:	internal	
Indication of sensor's fault:	red LED flashing	
Accuracy		
Setting accuracy (mechanical):	5 %	
Long-term stability of humidity:	typical < 0.8 % / year	
Output		
Number of contacts:	1x NO-SPST (AgSnO <sub>2</sub> )	
Current rating:	16 A / AC1, 10 A / 24 V DC	
Switched output:	4000 VA / AC1, 300 W / DC	
Switched voltage:	250 V AC1 / 24 V DC	
Output indication:	red LED shines	
Mechanical life:	3x10 <sup>7</sup>	
Electrical life:	0.7x10 <sup>5</sup>	
Other information		
Operational temperature:	-20 °C to 60 °C (-4 °F to 140 °F)	
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strengh:	2.5 kV (supply-output)	
Operational position:	vertical, with correct orientation	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel, IP10 on terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	69 g (2.4 oz. )	
Standards:	EN 60730-2-9, EN 61010-1	

- Hygro-thermostat for temperature monitoring and regulation in range 0 °C to 60 °C (32 °F to 140 °F) and relative humidity monitoring and regulation in range 50...90%.
- Possibility of setting of up to 8 conditions for contact switching and function permanently ON/OFF.
- Sensor is a part of the device - designated for measuring in switch-boards.
- Function of sensor control (damage, disturbances...).
- Fixed setting of temperature hysteresis at 2.5 °C (4.5 °F) and humidity at 4%.
- Output state is indicated by red LED.
- Supply voltage AC/DC 24-240 V.
- Output contact 1x NO-SPST 16 A/250 V AC1.
- 1-MODULE, DIN rail mounting.

### Device description

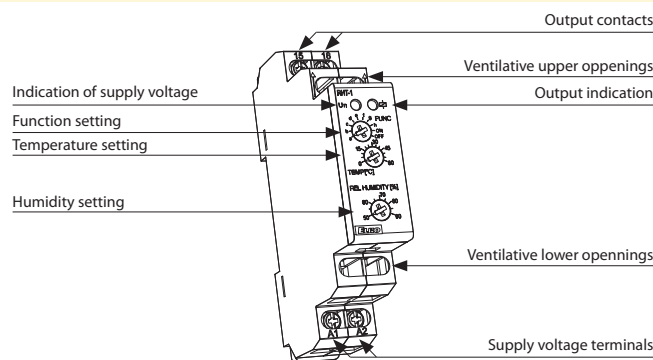

### Functions

Choice of function	Relay switched under the following conditions		
A	T > Tset	or	RH > RHset
B	T < Tset	or	RH > RHset
C	T > Tset	or	RH < RHset
D	T < Tset	or	RH < RHset
E	T < Tset	and	RH < RHset
F	T > Tset	and	RH < RHset
G	T < Tset	and	RH > RHset
H	T > Tset	and	RH > RHset
ON	relay permanently ON		
OFF	relay permanently OFF		

This device is designated for monitoring of parameters of environment (meaning temperature and relative humidity) in switchboards. It enables setting of eight conditions of contact closing and therefore it is usable for various types of load (e.g. fans, heating, air-conditioning, dehydrating units...).


While installing it is necessary to take into account the fact that hysteresis rises by persistence of measured values between sensor and ambient environment.

The device is equipped by sensor fault detection. In case of sensor fault, exceeding allowed limits (for temperature -30°C / -22 °F and +80°C/ 176 °F; for humidity 5% and 95%) or in case of faulty internal communication higher than 50% (due to e.g. high ambient disturbances) contact opens and sensor fault is indicated. Sensor fault doesn't have influence on function permanently ON or permanently OFF.

Note: In case the conditions for switching are not applied, relay is open.



### Symbol
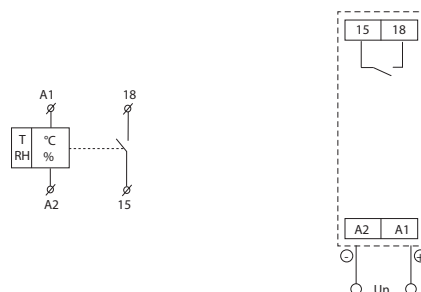
### Connection






EAN code  
RHV-1: 8595188140584


Technical parameters		RHV-1
Supply		
Supply terminals:	L - N	
Voltage range:	AC 230V / 50 - 60Hz	
Input voltage range:	- 15 % .. +10 %	
Input (apparent/loss):	max. 6 VA / 0.7 W	
Setting function	Setting function Jumper J3	
Function -  :	moistening	
Function -  :	drying	
Set. the scale of relative humidity	Humidity setting Jumper J2	
- range 1:	0 ... 30 % RH	
- range 2:	30 ... 60 % RH	
- range 3:	60 ... 90 % RH	
Slight setting of relative humidity:	Relative Humidity Setting Potentiometer	
Hysteresis	2, 3, 4 % from setup rate	
Hysteresis setting:	Jumper J1	
Output		
Output contact:	1x NO-SPST (AgSnO <sub>2</sub> )	
Current rating:	12 A / AC1	
Switching output:	3000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switched voltage:	250 V AC / 24 V DC	
Mechanical life:	3 x 10 <sup>7</sup>	
Electrical life:	0.7 x 10 <sup>5</sup>	
Other information		
Operation temperature:	-30 °C to 60 °C (-22 °F to 140 °F)	
Storing temperature:	-30 °C to 70 °C (-22 °F to 158 °F)	
Electrical strengh:	4kV (supply-output)	
Operation position:	sensor-side down	
Protection degree:	IP65	
Overvoltage cathegory:	III.	
Pollution degree:	2	
Max. cable size (mm²):	max. 1x 2.5, max. 2x 1.5 / with sleeve max. 1x 2.5 (AWG 12)	
Suggested power-supply cable:	CYKY 3x2.5 (CYKY 4x1.5)	
Dimensions:	153 x 62 x 34 mm (6" x 2.4" x 1.3")	
Weight:	148 g (5.2 oz.)	
Standards:	EN 60730-2-9, EN 61010-1	

- Single hygrostat is used for regulation of humidity in harsh environments (washdown, greenhouse, refrigeration).
- External version in IP65, box for mounting on the wall.
- Built-in hygro-sensor is integrated in the device.
- Two functions adjustable by jumper: moistening and drying.
- 3 adjustable (by jumper) levels of hysteresis.
- Supply voltage 230V AC.
- NO contact closure 12A/AC1.

### Description

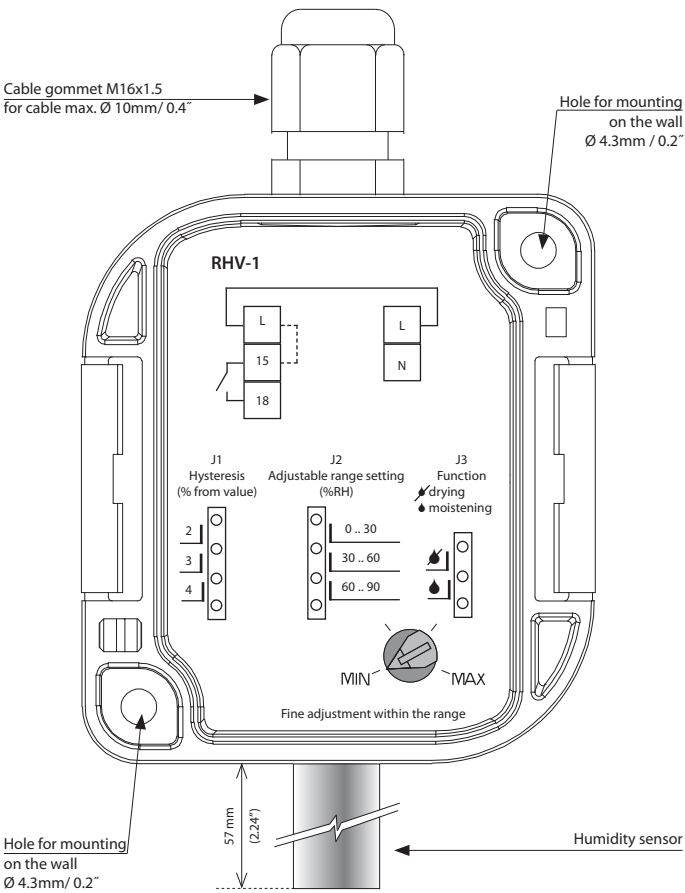


### Connection

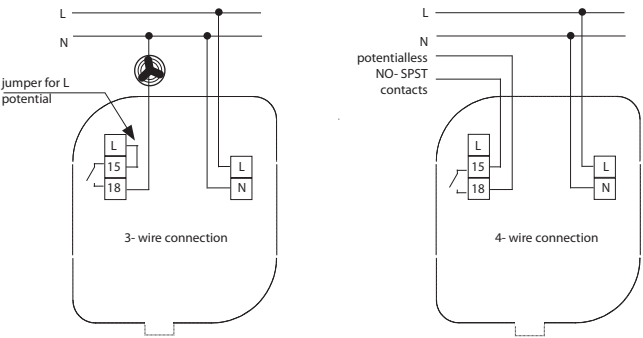

### Description of function

Device is supplied with a standard jumper.  
For the device to operate correctly, it must be mounted with the sensor side down.

### Function

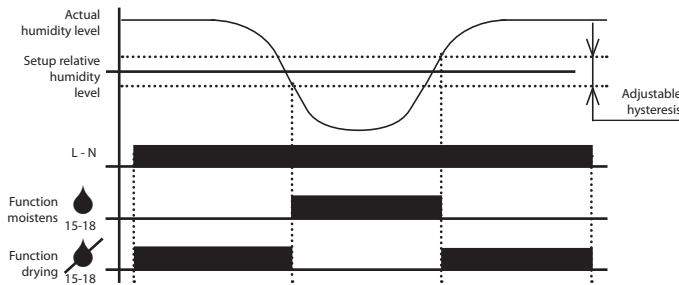

## TC, TZ, Pt100 | Thermo sensors



EAN code			
TC-0:	8595188110075	TZ-0:	8595188110591
TC-3:	8595188110617	TZ-3:	8595188110600
TC-6:	8595188110082	TZ-6:	8595188110594
TC-12:	8595188110099	TZ-12:	8595188110587
		Pt100-3:	8595188136136
		Pt100-6:	8595188136143
		Pt100-12:	8595188136150

Technical parameters	TC	TZ	Pt100
Range:	0 °C to +70 °C (32 °F to 158 °F)	-40 °C to +125 °C (-40 °F to 257 °F)	-30 °C to +200 °C (-22 °F to 392 °F)
Scanning element:	NTC 12K 5 %	NTC 12K 5 %	Pt100
In air/ in water:	(τ65) 92 s / 23 s	(τ65) 62 s / 8 s	(τ0.5) - / 7 s
In air/ in water:	(τ95) 306 s / 56 s	(τ95) 216 s / 23 s	(τ0.9) - / 19 s
Cable material:	High temperature PVC	Silicone	Silicone
Terminal material:	High temperature PVC	Nickel plated copper	Copper
Protection degree:	IP67	IP67	IP67
Insulation:	-	-	double insulation silicone

## Types of temperature sensors

	TC-0	TZ-0	-
- length:	100 mm	110 mm	-
- weight:	5 g	4.5 g	-
	TC-3	TZ-3	Pt100-3
- length:	3 m	3 m	3 m
- weight:	108 g	106 g	68 g
	TC-6	TZ-6	Pt100-6
- length:	6 m	6 m	6 m
- weight:	213 g	216 g	149 g
	TC-12	TZ-12	Pt100-12
- length:	12 m	12 m	12 m
- weight:	466 g	418 g	249 g

τ65 (95): time, which sensor needs to heat up on 65 (95) % of ambient temperature of environment, in which is located.

- Thermister temperature sensors are made of Negative Temperature Coefficient (NTC) embedded in a PVC or metal sleeve with a thermally-conductive sealer.
- **Sensor TC**
  - lead-in cable to sensor TC is made of wire CYSY 2D x 0.5 mm / 0.02".
- **Sensor TZ**
  - cable VO3SS-F 2D x 0.5 mm / 0.02" with silicone insulation for use in high temperature applications.
  - silicone insulation for use in high temperature applications.
- **Sensor Pt100**
  - shielded silicon 2x 0.22 mm<sup>2</sup> (AWG 21), shielding connected with a case.
- Temperature sensors can be connected directly to the terminal block.
- Cable lengths can not be changed, connected or modified.


## Resistive values of sensors in dependance on temperature

Temperature (°C/°F)	Sensor NTC (kΩ)	Sensor Pt100 (Ω)
20 / 68	14.7	107.8
30 / 86	9.8	111.7
40 / 104	6.6	115.5
50 / 122	4.6	119.4
60 / 140	3.2	123.2
70 / 158	2.3	127.1

Tolerance of sensor NTC 12 kΩ is ± 5% by 25 °C / 77 °F.

Long-term resistance stability by sensor Pt100 is 0.05% (10 000 hours).

## Diagramm of sensor warm up via air

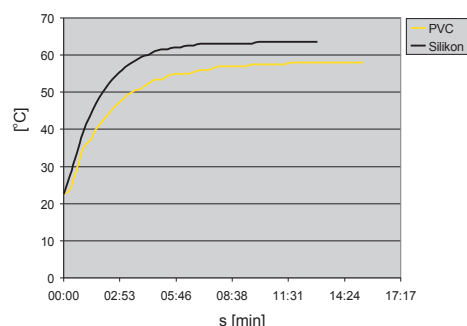

PVC - reaction to water temperature from 22.5 °C to 58 °C (from 72.5 °F to 136.4 °F).

Silicone - reaction to water temperature from 22.5 °C to 63.5 °C (from 72.5 °F to 144.5 °F).

TELVA 230V, TELVA 24V | Termodrive



EAN code  
TELVA 230V, NC: 8595188166010  
TELVA 230V, NO: 8595188166027  
TELVA 24V, NC: 8595188166034  
TELVA 24V, NO: 8595188166041

Technical parameters	TELVA 230V	TELVA 24V
Operating voltage:	230V, 50/60 Hz	24V, 50/60 Hz
Switching current max:	300 mA for max. 2 min	250 mA for max. 2 min
Operating current:	8 mA	75 mA
Closing / opening time:	cca 3 min.	cca 3 min.
Power input:	1.8 W	1.8 W
Protection:	IP 54/II	IP 54/II
Settings:	4 mm	4 mm
Stopping force:	100 N ±5 %	100 N ±5 %
Cable length:	1 m	1 m
Connecting wire:	2 x 0.75 mm <sup>2</sup>	2 x 0.75 mm <sup>2</sup>
Media temperature:	0.. +100 °C	0.. +100 °C
Color:	white RAL 9003	white RAL 9003
Dimensions h/w/d:	55+5 x 44 x 61 mm	55+5 x 44 x 61 mm

- The thermo-regulation drive TELVA is used to control underfloor and radiator hot-water heating.
- It is known for its quiet operation. It has a built-in valve position indicator.
- By mounting using the VA valve adapter, the thermo-regulation drive TELVA is applicable for a wide range of thermostatic valves available on the market.
- Design:
  - without voltage open (NO)
  - without voltage closed (NC)
- Types of thermo actuators:
  - TELVA 230V, NO
  - TELVA 230V, NC
  - TELVA 24V, NO
  - TELVA 24V, NC
- Type of use:

Underfloor heating - wireless controller RFTC-50/G measures the room temperature, and based on the set program, sends a command to the switching unit RFSA-66M to open / close the thermo-regulation drive TELVA at the distribution.

It is generally supplied with a valve adapter VA-80 in low design with bar M30 x 1.5 (white-gray), which may not be compatible with all types of valves.

# Protection relays for industry

New range of monitoring relays covers control of:

- Voltage relays
- Current relays
- Power factor relays
- Frequency relays
- Reverse power relays
- Speed sensing
- Synchro-check relays
- Ground fault relays

We come of monitoring relays that monitor machinery and manufacturing equipment. Enhanced types boast the ability to measure to approximately 2% accuracy, which distinguishes them from cheap competitors and increases the reliability. Experts will be pleased with the low power consumption of just 2.5 watts and the ability to monitor AC voltage and non-sinusoidal waveforms. They are suitable for 50 Hz and 60 Hz networks, which will be especially appreciated by customers whose products travel around the globe.

The powerful AT Mega 48P control processor enables the upgraded relay to modify the product parameters according to customer requirements (application request) without the need for hardware change.

For current relays, the accuracy of the current amplifier calibration current offset is increased. There are no connector connections inside the products, so they are mechanically very resistant to shocks. Also beneficial is the signaling LED, which alerts the operator to any delay.

In addition to a number of technical improvements, the relay also has a new, more modern design.

**7 reasons, why you should chose monitoring relays from ELKO EP:**

- Brand new improved design.
- Focus on industrial applications.
- Bigger range of monitored current / voltage relays .
- Increased measurement accuracy thanks to the newest components.
- Suitable from 50 / 60 Hz networks.
- Extended power supply 24-240V AC / DC.
- Auxiliary power supply.



# Voltage

## 1 phase

### AC



#### VROU1-28

These units monitor a single phase supply and operate relays if the phase voltage goes below or above set levels.



#### VRU1-28, VRO1-28

These units monitor a single phase supply and operate relays if the phase voltage goes below or above set levels.

### DC



#### VRMV1-28

These units monitor a voltage of 50, 75 or 150 mV.

## 3 phase



#### VROU3-28

These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below or above set levels.



#### VRU3-28

These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below set levels.



#### VRO3-28

These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below set levels.



#### VROU3N-28

These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below or above set levels.



#### VRU3N-28

These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below set levels.



#### VRO3N-28

These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below set levels.



#### VRSF3, VRSF3N

This unit monitors the voltage levels and phase sequence of a three-phase supply.



#### VRBU3, VRBU3N

This unit monitors a 3-phase supply for phase imbalance, low or missing phases or incorrect phase sequence.





## Current

### AC



#### CROU1-28

These units monitor the AC current to a load and operate relays if the current goes below or above a set level.



#### CRU1-18, CRO1-18

These units monitor the AC current to a load and operate relays if the current goes below or above a set level.

### DC



#### CRMA1-28

These units monitor a current of 0-1, 0-10 or 4-20 mA.

## Synchro-check



#### VRSC1-28

This unit compares the voltage, frequency and phase angle of two supplies and operates a relay according to the synchronicity of the supplies.

## Ground fault



#### CRGF1-18

Monitors the dangerous value of the leakage ground current that can cause

## Reverse power



#### CRRP1-28, CRRP3-28

This unit monitors a single or three-phase supply for reverse power and trips a relay if it detects reverse power ( $I \times \cos \Phi$ ) over a set limit.



## Speed sensing



#### FRSS1-38

This unit monitors the speed of rotating equipment using a magnetic pick-up and provides three relay outputs according to measured speeds.

Every type name has a logic explanation and lets you know everything you need to know to make a great choice:

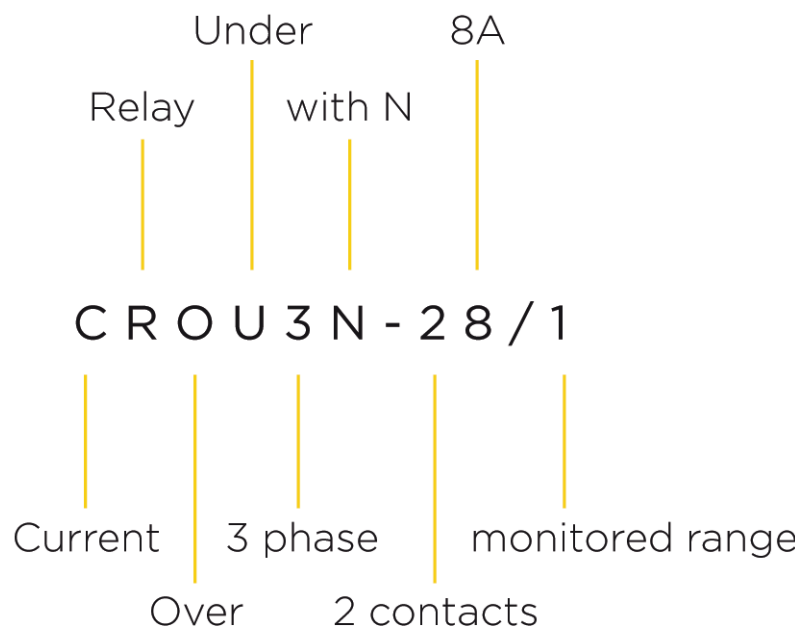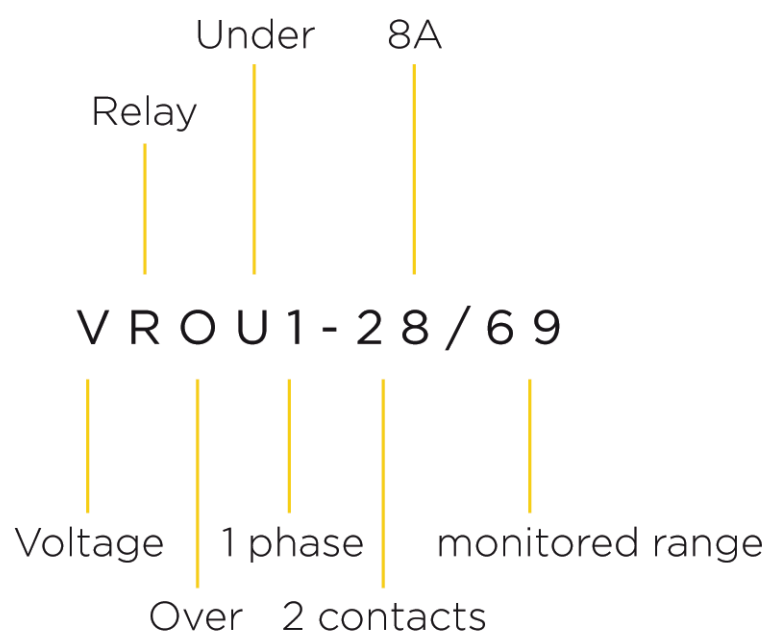




EAN code  
VROU1-28/69: 8595188155274  
VROU1-28/139: 8595188155281  
VROU1-28/277: 8595188155298

Technical parameters	VROU1-28/69	VROU1-28/139	VROU1-28/277
Nominal voltage range (Un):	57.7-69.3 V	100-139 V	220-277 V
	L-N		
Overload capacity			
- continuous:	87 V	174 V	346 V
- 10 s max:	104 V	209 V	416 V
Operating frequency:	45-65 Hz		
Auxiliary Supply Voltage:	24 V - 240 V AC/DC		
AC Supply frequency:	45-65 Hz		
Supply voltage tolerance:	±10%		
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W		
Over-voltage range (Umax):	100-125 %Un		
Under-voltage range (Umin):	75-100 %Un		
Differential:	Adjustable 1-15 %Un		
Trip time delay:	Adjustable 0.5 to 10s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		

#### Other Data


Operating temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Over-voltage category:	III
Pollution degree:	2
Environmental protection:	IP40 for front panel, IP20 for terminals
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Dimensions:	90 x 52 x 64 mm
Weight:	138 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4

#### Connection




- These units monitor a single phase supply and operate relays if the phase voltage goes below or above set levels. Front panel controls allow selection of:
  - Under- and Over-voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

#### Device description

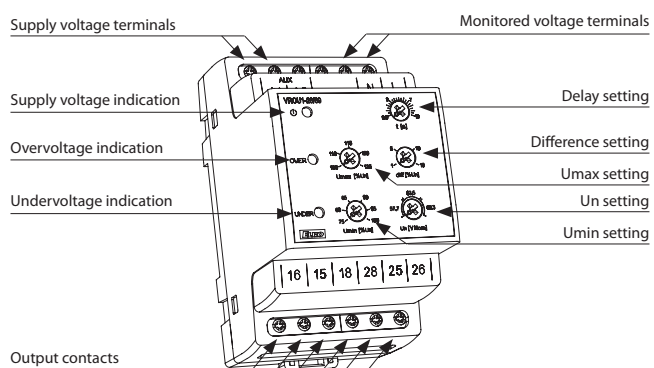

#### Function

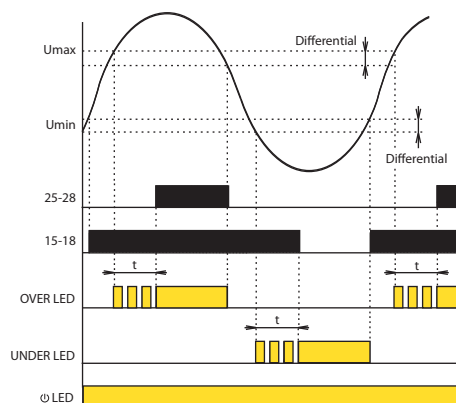




EAN code  
VRU1-28/69: 8595188154437  
VRU1-28/139: 8595188154444  
VRU1-28/277: 8595188154451  
VRO1-28/69: 8595188154406  
VRO1-28/139: 8595188154413  
VRO1-28/277: 8595188154420

Technical parameters	69	139	277
Nominal voltage range (Un):	57.7-69.3 V	100-139 V	220-277 V
		L-N	
Overload capacity			
- continuous:	87 V	174 V	346 V
- 10 s max:	104 V	209 V	416 V
Operating frequency:		45-65 Hz	
Auxiliary Supply Voltage:		24 V - 240 V AC/DC	
AC Supply frequency:		45-65 Hz	
Supply voltage tolerance:		±10%	
Auxiliary Voltage Burden (Max):		3 VA / 1.2 W	
Over-voltage range (Umax):		100-125 %Un (VRO1-28)	
Under-voltage range (Umin):		75-100 %Un (VRU1-28)	
Differential:		Adjustable 1-15 %Un	
Trip time delay:		Adjustable 0.5 to 10s	
Relay contacts:		2 x changeover, volt-free, for general switching operations	
Load capacity - AC:		250 V @ 8 A, 2 kVA	
Load capacity - DC:		30 V 8A	
Insulation:		4 kV/1 min	
Mechanical endurance:		30 x 10 <sup>6</sup> operations	
Other Data			
Operating temperature:		-20 to +55 °C	
Storage temperature:		-30 to +70 °C	
Environmental protection:		IP40 for front panel, IP20 for terminals	
Over-voltage category:		III	
Pollution degree:		2	
Maximum conductor size:		2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	
Dimensions:		90 x 52 x 64 mm	
Weight:		138 g	
Standards:		EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4	


- These units monitor a single phase supply and operate relays if the phase voltage goes below or above set levels. Front panel controls allow selection of:
  - Under (VRU1-28)- and Over- (VRO1-28) voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

Device description

VRU1-28

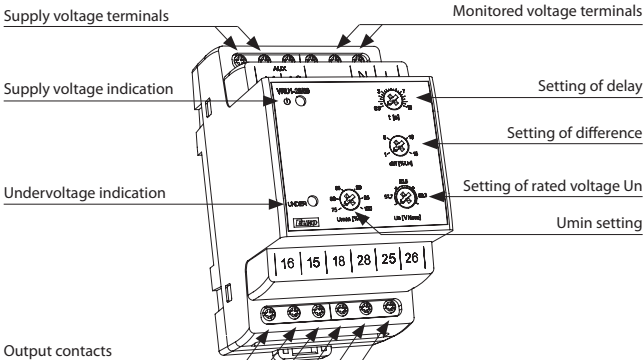


VRO1-28

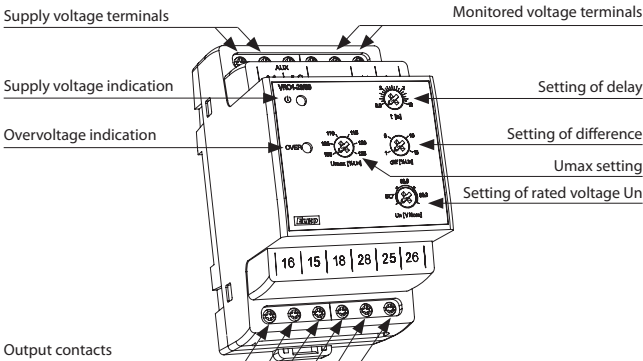


Function


VRU1-28

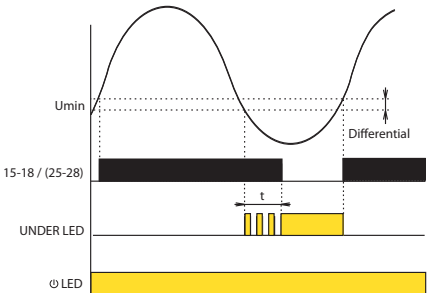


VRO1-28

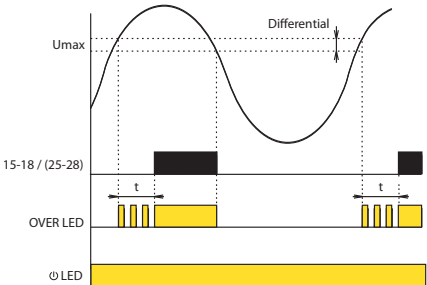


VRU1-28

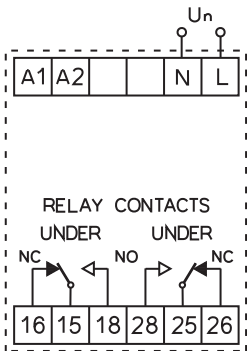

VRO1-28

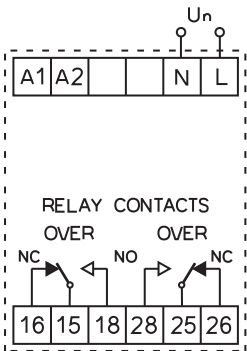


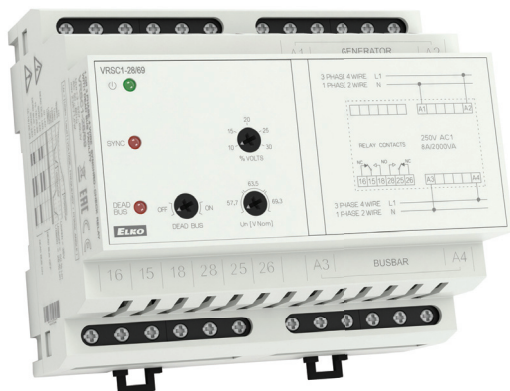

EAN code  
 VRSC1-28/69: 8595188142250  
 VRSC1-28/139: 8595188142267  
 VRSC1-28/277: 8595188142274


Technical parameters	VRSC1-28/69	VRSC1-28/139	VRSC1-28/277
Rated Vg range Un:	57-69 V	100-139 V	220-277 V
Overload capacity			
- continuous:	87 V	174 V	346 V
- 10s max.:	104 V	209 V	416 V
Minimum supply Vg Uon:	35 V	60 V	132 V
Burden on supply (Max):	2 VA / 1.6W	2.7 VA / 1.7W	4 VA / 2.2W
Frequency range:	45-65 Hz		
Deadbus on Udbon:	25% Uon		
Deadbus off Udboff:	50% Uon		
Sync Tolerance:	10-30% Volts		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		
Other Data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel, IP20 for terminals		
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>		
Dimensions:	90 x 105 x 64 mm		
Weight:	291 g	335 g	332 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

### Connection

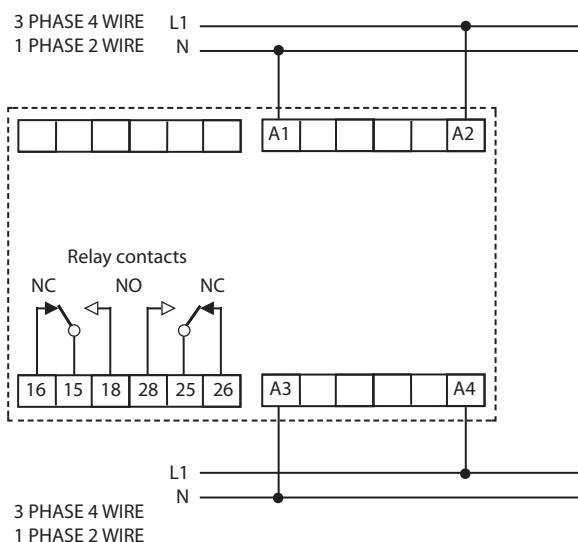


- This unit compares the voltage, frequency and phase angle of two supplies and operates a relay according to the synchronicity of the supplies. If the two supplies cease to match, the relay operates to provide a control output. The relay output can be used for alarm or control purposes.
- The unit also provides a dead bus function. If the bus supply fails, the relay operates and the output can be used to switch in an emergency generator. LEDs indicate power on, relay and dead bus status.
- Controls on the front panel set the trip points at which the relays and LEDs operate:
  - Degree of synchronicity Ux (%Volts)
  - Nominal voltage (Un)
  - Dead bus function on/off
- The unit is powered from the generator supply.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

### Device description

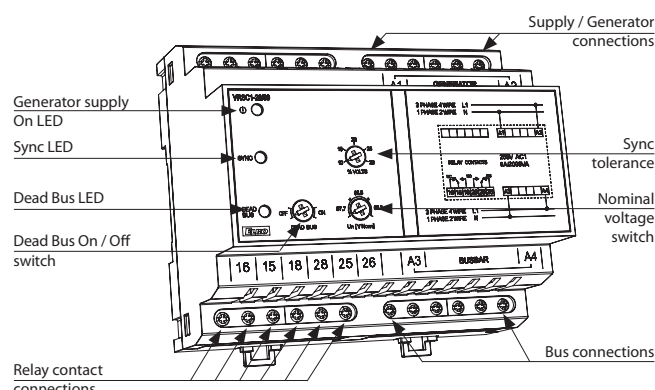

### Function

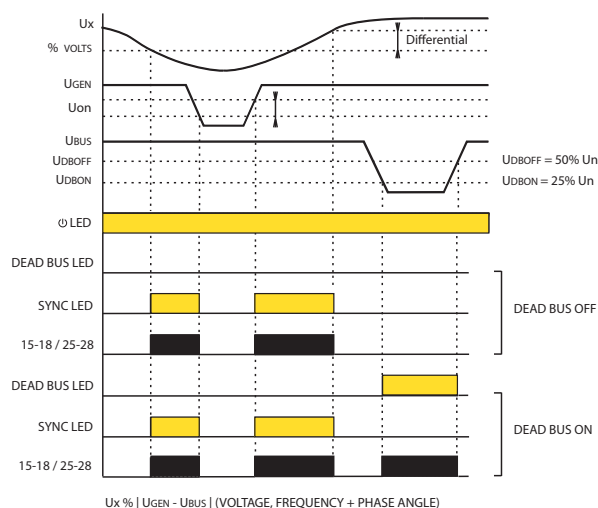




EAN code  
VRMV1-28/240: 8595188145695  
VRMV1-28/24: 8595188144872


Technical parameters	VRMV1-28/24	VRMV1-28/240
Supply voltage:	12-24V DC	24V-240V AC/DC
Burden on supply:	1W	3VA/0.9W
AC Supply frequency:	45-65 Hz	
Supply voltage tolerance:	±10%	
Rated DC voltage Uin:	50mV, 75 mV, 100 mV	
Input impedance:	50 kΩ	
Over-voltage range (Umax):	40-120 % Uin	
Under-voltage range (Umin):	0-80 % Uin	
Overload capacity:	10 x Uin	
Differential:	Fixed at 1% Uin	
Trip time delay:	Adjustable 0.5 to 10s	
Relay contacts:	2 x changeover, volt-free, for general switching operations	
Load capacity - AC:	250 V @ 8 A, 2 kVA	
Load capacity - DC:	30 V 8A	
Insulation:	4 kV/1 min	
Mechanical endurance:	30 x 10 <sup>6</sup> operations	
Other Data		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Over-voltage category:	III	
Pollution degree:	2	
Environmental protection:	IP40 for front panel, IP20 for terminals	
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	
Dimensions:	90 x 52 x 64 mm	
Weight:	135 g	
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4	

- These units monitor a voltage of 50, 75 or 150 mV, e.g. from a standard current shunt, and operates one of two relays if the voltage goes above or below set levels. Front panel controls allow selection of:
  - under- and over-voltage trip levels Umax, Umin
  - nominal rated voltage of 50, 75 or 100 mV (Uin)
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. Two changeover, volt-free relays are fitted.
- Two types are available - a 12-24 unit powered from 12-24V DC and a 24-240 unit powered from 24V-240V AC or DC
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.


Device description

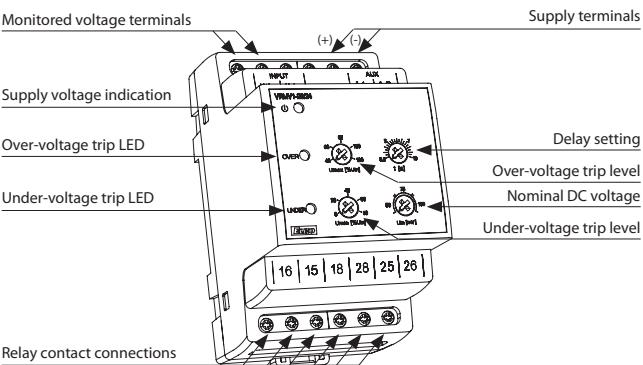

Function

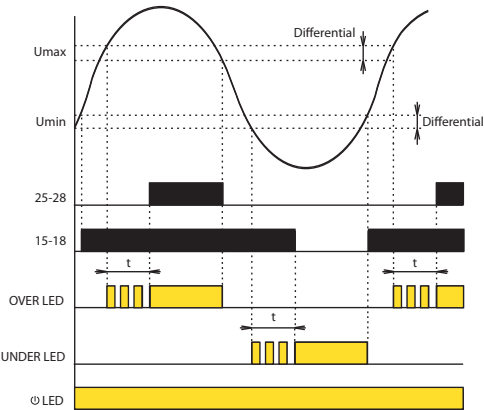

Connection








EAN code  
VROU3-28/120: 8595188155304  
VROU3-28/240: 8595188155311  
VROU3-28/480: 8595188155328

Technical parameters	VROU3-28/120	VROU3-28/240	VROU3-28/480
Nominal voltage range (Un):	100-120 V	173-240 V	380-480 V
Overload capacity			
- continuous:	150 V	300 V	600 V
- 10 s max:	180 V	360 V	720 V
Operating frequency:	45-65 Hz		
Auxiliary Supply Voltage:	24 V - 240 V AC/DC		
AC Supply frequency:	45-65 Hz		
Supply voltage tolerance:	±10%		
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W		
Over-voltage range (Umax) :	100-125 %Un		
Under-voltage range (Umin):	75-100 %Un		
Differential:	Adjustable 1-15 %Un		
Trip time delay:	Adjustable 0.5 to 10s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		

#### Other Data


Operating temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Over-voltage category:	III
Pollution degree:	2
Environmental protection:	IP40 for front panel, IP20 for terminals
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Dimensions:	90 x 52 x 64 mm
Weight:	138 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4

#### Connection




- These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below or above set levels. Front panel controls allow selection of:
  - Under- and Over-voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

#### Device description

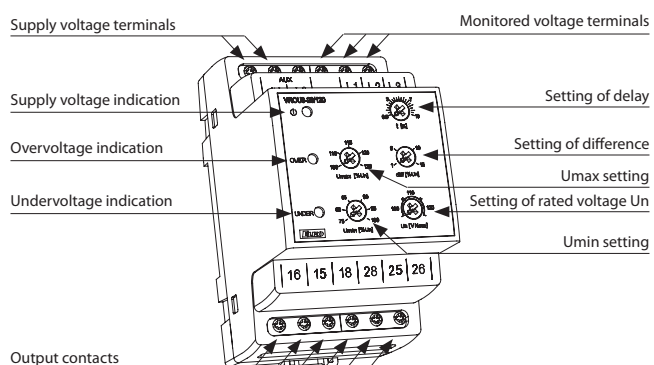

#### Function

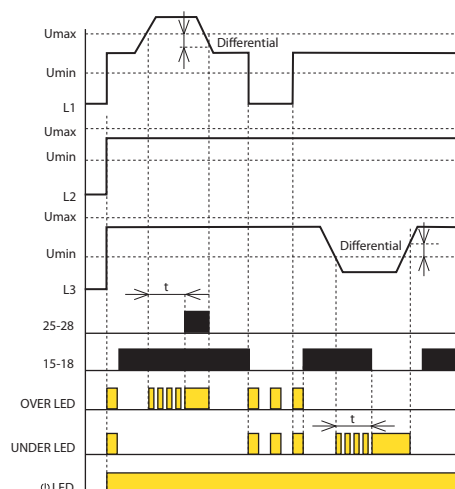




EAN code  
VRU3-28/120: 8595188154376  
VRU3-28/240: 8595188154383  
VRU3-28/480: 8595188154390


Technical parameters	VRU3-28/120	VRU3-28/240	VRU3-28/480
Nominal voltage range (Un):	100-120 V	173-240 V	380-480 V
	L-L		
Overload capacity			
- continuous:	150 V	300 V	600 V
- 10 s max:	180 V	360 V	720 V
Operating frequency:	45-65 Hz		
Auxiliary Supply Voltage:	24 V - 240 V AC/DC		
AC Supply frequency:	45-65 Hz		
Supply voltage tolerance:	±10%		
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W		
Under-voltage range (Umin):	75-100 %Un		
Differential:	Adjustable 1-15 %Un		
Trip time delay:	Adjustable 0.5 to 10s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		
Other Data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel, IP20 for terminals		
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>		
Dimensions:	90 x 52 x 64 mm		
Weight:	138 g		
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

- These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below set levels. Front panel controls allow selection of:
  - Under voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.


Device description

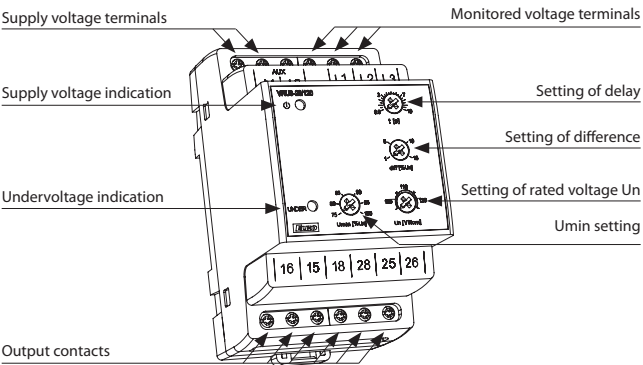

Function

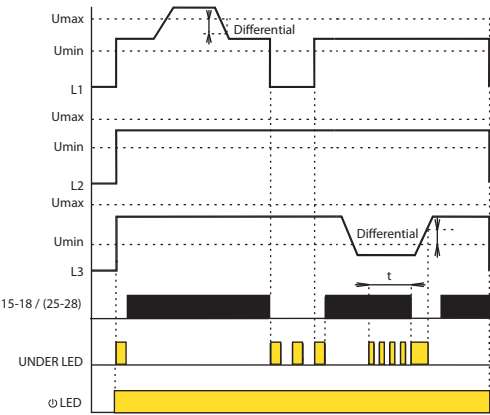

Connection

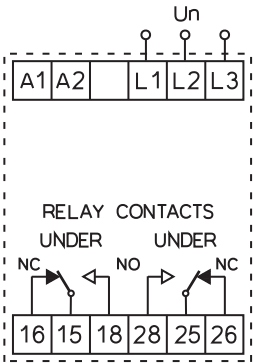




EAN code  
VRO3-28/120: 8595188155243  
VRO3-28/240: 8595188155250  
VRO3-28/480: 8595188155267


Technical parameters		VRO3-28/120	VRO3-28/240	VRO3-28/480
Nominal voltage range (Un):		100-120 V	173-240 V	380-480 V
Overload capacity		L-L		
- continuous:		150 V	300 V	600 V
- 10 s max:		180 V	360 V	720 V
Operating frequency:			45-65 Hz	
Auxiliary Supply Voltage:		24 V - 240 V AC/DC		
AC Supply frequency:		45-65 Hz		
Supply voltage tolerance:		±10%		
Auxiliary Voltage Burden (Max):		3 VA / 1.2 W		
Over-voltage range (Umax):		100-125 %Un		
Differential:		Adjustable 1-15 %Un		
Trip time delay:		Adjustable 0.5 to 10s		
Relay contacts:		2 x changeover, volt-free, for general switching operations		
Load capacity - AC:		250 V @ 8 A, 2 kVA		
Load capacity - DC:		30 V 8A		
Insulation:		4 kV/1 min		
Mechanical endurance:		30 x 10 <sup>6</sup> operations		
Other Data				
Operating temperature:		-20 to +55 °C		
Storage temperature:		-30 to +70 °C		
Over-voltage category:		III		
Pollution degree:		2		
Environmental protection:		IP40 for front panel, IP20 for terminals		
Maximum conductor size:		2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>		
Dimensions:		90 x 52 x 64 mm		
Weight:		138 g		
Standards:		EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

## Connection




- These units monitor a 3-phase 3-wire supply and operate relays if a phase-phase voltage goes below set levels. Front panel controls allow selection of:
  - Over voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

## Device description

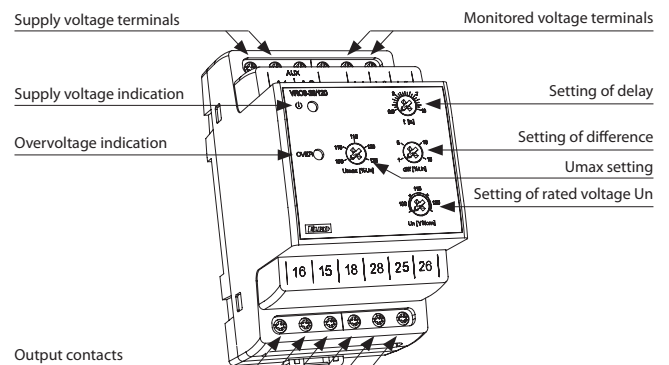

## Function

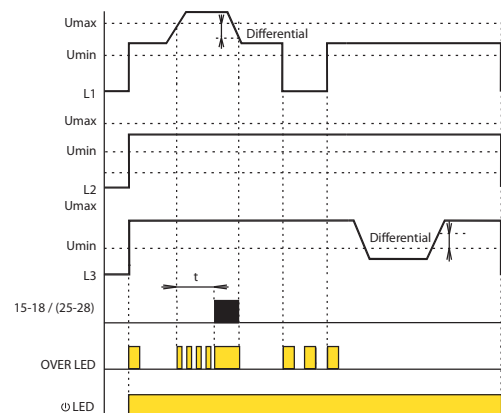




EAN code  
VROU3N-28/120: 8595188154345  
VROU3N-28/240: 8595188154352  
VROU3N-28/480: 8595188154369

Technical parameters	VROU3N-28/120	VROU3N-28/240	VROU3N-28/480
Nominal voltage range (Un):	57.7-69.3 V	100-139 V	220-277 V
	L-N		
Overload capacity			
- continuous:	87 V	174 V	346 V
- 10 s max:	104 V	209 V	416 V
Operating frequency:	45-65 Hz		
Auxiliary Supply Voltage:	24 V - 240 V AC/DC		
AC Supply frequency:	45-65 Hz		
Supply voltage tolerance:	±10 %		
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W		
Over-voltage range (Umax):	100-130 %Un		
Under-voltage range (Umin):	70-100 %Un		
Differential:	Adjustable 1-15 %Un		
Trip time delay:	Adjustable 0.5 to 10s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		


Other Data	
Operating temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Over-voltage category:	III
Pollution degree:	2
Environmental protection:	IP40 for front panel, IP20 for terminals
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Dimensions:	90 x 52 x 64 mm
Weight:	138 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4

Connection




- These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below or above set levels. Front panel controls allow selection of:
  - Under- and Over-voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

Device description

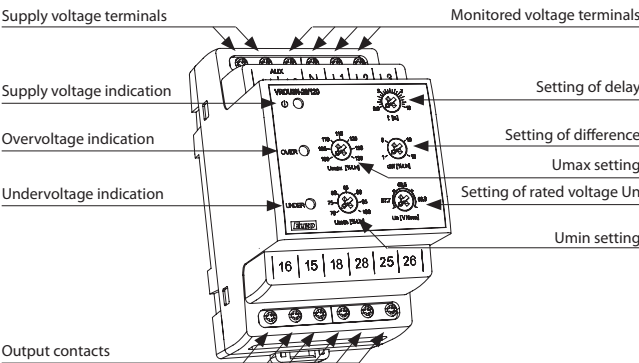

Function

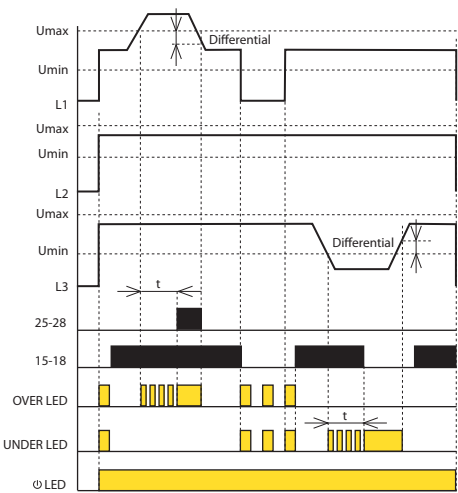




EAN code  
 VRU3N-28/120: 8595188154468  
 VRU3N-28/240: 8595188154475  
 VRU3N-28/480: 8595188154482


Technical parameters	VRU3N-28/120	VRU3N-28/240	VRU3N-28/480
Nominal voltage range (Un):	57.7-69.3 V	100-139 V	220-277 V
	L-N		
Overload capacity			
- continuous:	87 V	174 V	346 V
- 10 s max:	104 V	209 V	416 V
Operating frequency:	45-65 Hz		
Auxiliary Supply Voltage:	24 V - 240 V AC/DC		
AC Supply frequency:	45-65 Hz		
Supply voltage tolerance:	±10%		
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W		
Under-voltage range (Umin):	70-100 %Un		
Differential:	Adjustable 1-15 %Un		
Trip time delay:	Adjustable 0.5 to 10s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		
Other Data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel, IP20 for terminals		
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>		
Dimensions:	90 x 52 x 64 mm		
Weight:	138 g		
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

### Connection




- These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below set levels. Front panel controls allow selection of:
  - Under voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

### Device description

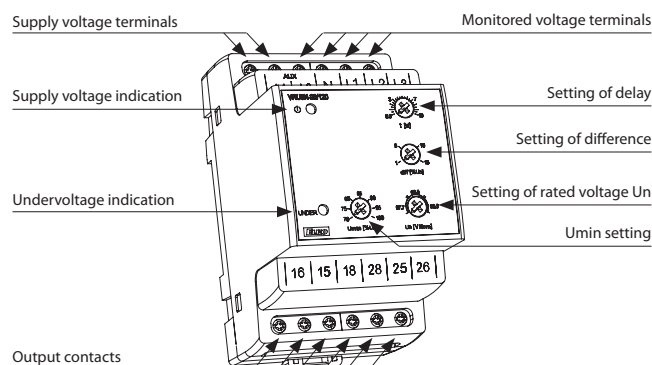

### Function

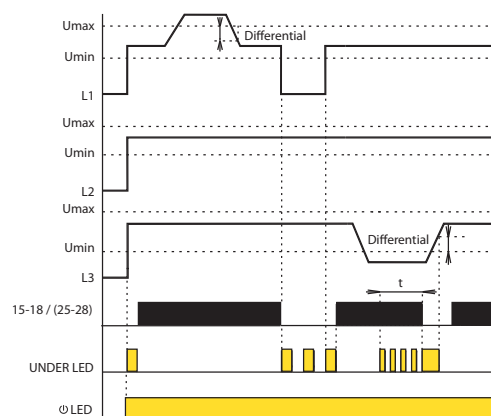




EAN code  
VRO3N-28/120: 8595188155335  
VRO3N-28/240: 8595188155342  
VRO3N-28/480: 8595188155359


Technical parameters		VRO3N-28/120	VRO3N-28/240	VRO3N-28/480
Nominal voltage range (Un):	57.7-69.3 V	100-139 V	220-277 V	
		L-N		
Overload capacity				
- continuous:	87 V	174 V	346 V	
- 10 s max:	104 V	209 V	416 V	
Operating frequency:	45-65 Hz			
Auxiliary Supply Voltage:	24 V - 240 V AC/DC			
AC Supply frequency:	45-65 Hz			
Supply voltage tolerance:	±10%			
Auxiliary Voltage Burden (Max):	3 VA / 1.2 W			
Over-voltage range (Umax):	100-125 %Un			
Differential:	Adjustable 1-15 %Un			
Trip time delay:	Adjustable 0.5 to 10s			
Relay contacts:	2 x changeover, volt-free, for general switching operations			
Load capacity - AC:	250 V @ 8 A, 2 kVA			
Load capacity - DC:	30 V 8A			
Insulation:	4 kV/1 min			
Mechanical endurance:	30 x 10 <sup>6</sup> operations			
Other Data				
Operating temperature:	-20 to +55 °C			
Storage temperature:	-30 to +70 °C			
Over-voltage category:	III			
Pollution degree:	2			
Environmental protection:	IP40 for front panel, IP20 for terminals			
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>			
Dimensions:	90 x 52 x 64 mm			
Weight:	138 g			
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4			

- These units monitor a 3-phase 4-wire supply and operate relays if a phase-neutral voltage goes below set levels. Front panel controls allow selection of:
  - Over voltage trip levels,
  - nominal rated voltage,
  - differential voltage for operating hysteresis and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.


Device description

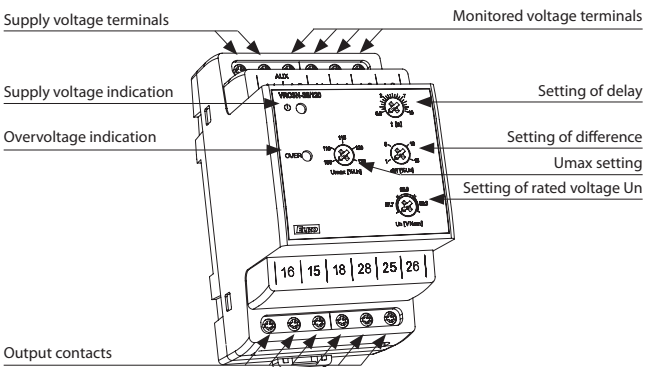

Function

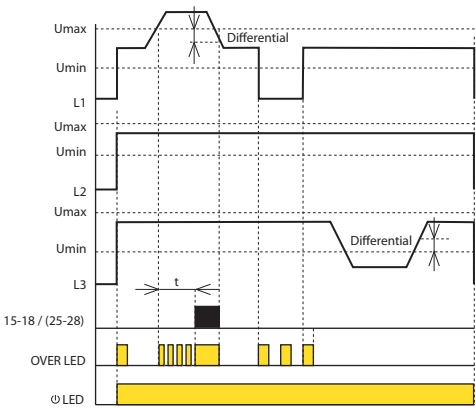

Connection








EAN code  
VRSF3-18/120: 8595188142472 VRSF3N-18/120: 8595188142502  
VRSF3-18/240: 8595188142489 VRSF3N-18/240: 8595188142519  
VRSF3-28/480: 8595188142496 VRSF3N-28/480: 8595188142526


Technical parameters	120	240	480
Voltage range (Un Unom):			
VRSF3 L-L	100-120 V	173-240 V	380-480 V
VRSF3N L-N	58-69 V	100-139 V	220-277 V
Overload			
- contin.: VRSF3	150 V	300 V	600 V
VRSF3N	87 V	174 V	346 V
- 10s max: VRSF3	180 V	360 V	720 V
VRSF3N	104 V	209 V	416 V
Supply threshold (Umin):	Fixed at 85% of Unom		
Operating frequency (Fn):	45-65 Hz		
Burden on supply (Max):	1.7W 3 VA approx.		
Differential:	Fixed at 1% Unom		
Relay contacts: volt-free, for general switching operations	1 x c/o		2 x c/o
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		
Other Data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel, IP10 for terminals		IP40 for front panel, IP20 for terminals
Maximum conductor size:	2 x 2.5 mm <sup>2</sup> or 1 x 4 mm <sup>2</sup>		2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Dimensions:	90 x 17.6 x 64 mm		90 x 52 x 64 mm
Weight:	63 g		121 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

## Connection

VRSF3-18/120(240)  
(VRSF3N-18/120(240))




VRSF3-28/480  
(VRSF3N-28/480)

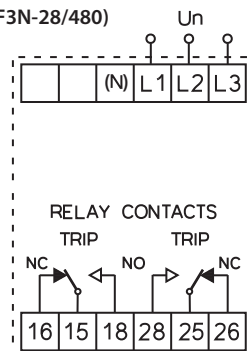


- This unit monitors the voltage levels and phase sequence of a three-phase supply and operates a relay if any phase voltage goes below a set level or if the phase sequence (L1, L2, L3) is incorrect. A front panel control allows selection of minimum voltage level. LEDs indicate power on and trip status.
- Versions are available to suit 3-wire, 3ph (VRSF3) and 4-wire, 3ph+N (VRSF3N) supplies of 110V, 220V and 430V nominal. The 110V and 230V versions occupy a single module width on the DIN rail and have a single relay contact whereas the 430V version occupies a three-module width and has two relay contacts.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

## Device description


VRSF3-18/120(240)  
VRSF3N-18/120(240)

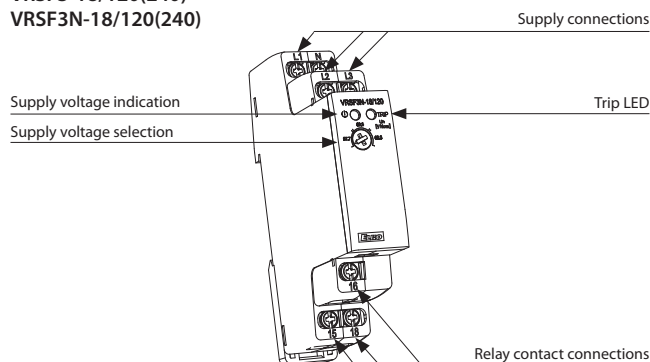

VRSF3-28/480  
VRSF3N-28/480

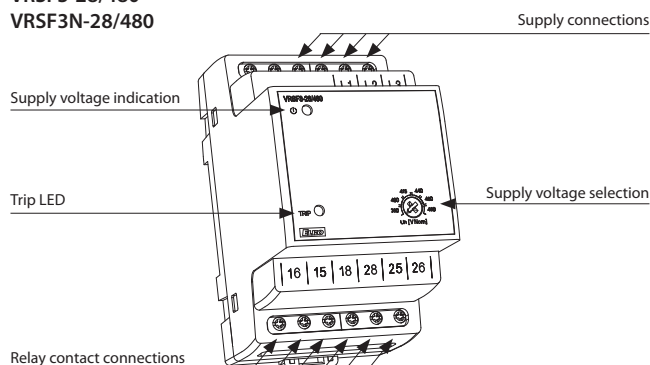

## Function

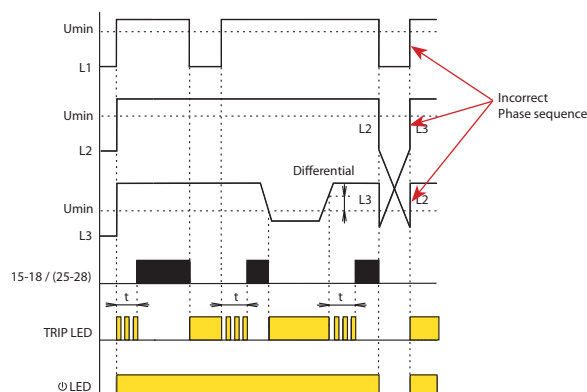




EAN code  
VRBU3-18/120: 8595188142533 VRBU3N-18/120: 8595188142564  
VRBU3-18/240: 8595188142540 VRBU3N-18/240: 8595188142571  
VRBU3-28/480: 8595188142557 VRBU3N-28/480: 8595188142588

Technical parameters	120	240	480
Voltage range Un (Vnom):			
VRBU3 L-L	100-120 V	173-240 V	380-480 V
VRBU3N L-N	58-69 V	100-139 V	220-277 V
Overload			
- contin.: VRBU3	150 V	300 V	600 V
VRBU3N	87 V	174 V	346 V
- 10s max: VRBU3	180 V	360 V	720 V
VRBU3N	104 V	209 V	416 V
Max. operating voltage Uoff:	187 V	374 V	749 V
Burden on supply (Max):	1.7 3 VA max		
Operating frequency:	45-65 Hz		
Phase imbalance trip level:	Adjustable 5-15% Un (Vnom)		
Differential:	Fixed at 1% Un (Vnom)		
Low-voltage trip level (Umin):	Adjustable 50-85% Un (Vnom)		
Trip delay t:	Adjustable 0.5 - 10s		
Relay contacts: volt-free, for general switching operations:	1 x c/o		2 x c/o
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations		
Other Data			
Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel,	IP40 for front panel,	
	IP10 for terminals	IP20 for terminals	
Maximum conductor size:	2 x 2.5 mm <sup>2</sup> or 1 x 4 mm <sup>2</sup>		2 x 1.5 mm <sup>2</sup> or
			1 x 2.5 mm <sup>2</sup>
Dimensions:	90 x 17.6 x 64 mm		90 x 52 x 64 mm
Weight:	66 g		123 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		


- This unit monitors a 3-phase supply for phase imbalance, low or missing phases or incorrect phase sequence and trips a relay if it detects any anomaly. A front panel control allows selection of minimum voltage level. LEDs indicate power on and trip status.
- Versions are available to suit 3-wire, 3ph (VRBU3) and 4-wire, 3ph+N (VRBU3N) supplies of 110V, 210V and 430V nominal. The 110V and 120V versions occupy a single module width on the DIN rail and have a single relay contact whereas the 430V version occupies a three-module width and has two relay contacts.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

Device description


VRBU3-18/120(240)  
VRBU3N-18/120(240)

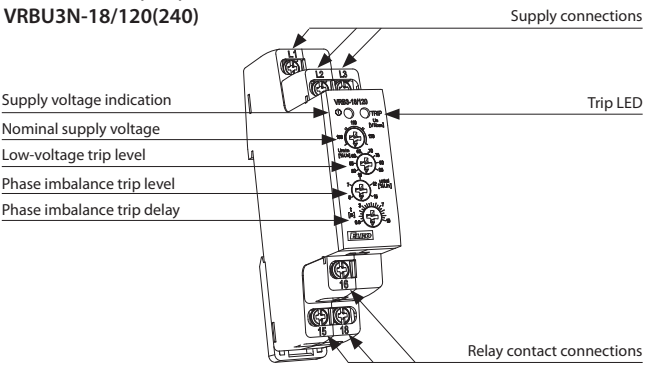

VRBU3-28/480  
VRBU3N-28/480

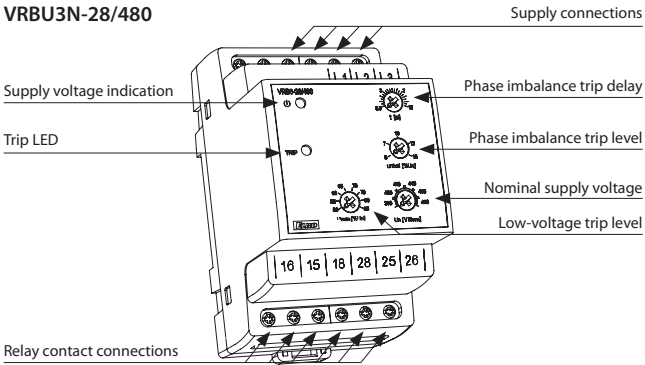


Function

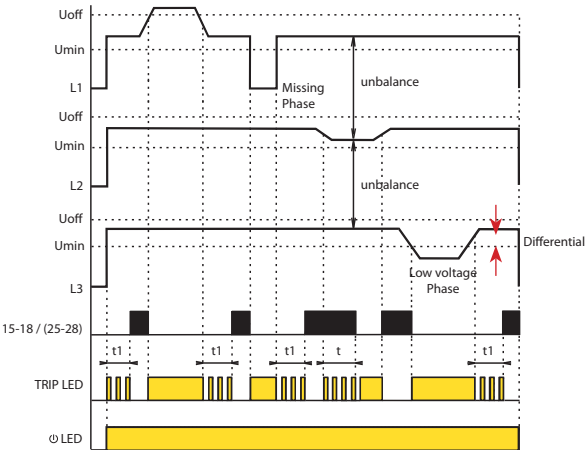


Connection

VRBU3-18/120(240)  
(VRBU3-28/480)



VRBU3N-18/120(240)  
(VRBU3N-28/480)






EAN code  
CROU1-28/1: 8595188142090  
CROU1-28/5: 8595188142106


Technical parameters	CROU1-28/1	CROU1-28/5
<b>Monitored supply</b>		
Load current rating In:	1 A	5 A
Maximum overload		
- permanent:	2 A	10 A
- for 3s max:	20 A	50 A
Operating frequency:	45-65 Hz	
Current trip level - adjustable:	40-120% of In	
Trip time delay – adjustable:	0.5 to 10s	
Hysteresis differential:	Preset to 1% of range	
<b>Auxiliary supply</b>		
	24-240V AC or DC ±10% 1.2W/3VA	
AC frequency range	45-65 Hz	
Relay contacts:	2 x changeover, volt-free, for general switching operations	
Load capacity - AC:	250 V @ 8 A, 2 kVA	
Load capacity - DC:	30 V 8A	
Insulation:	4 kV/1 min	
Mechanical endurance:	30 x 10 <sup>6</sup> operations	
<b>Other Data</b>		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Over-voltage category:	III	
Pollution degree:	2	
Environmental protection:	IP40 for front panel, IP20 for terminals	
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	
Dimensions:	90 x 52 x 64 mm	
Weight:	129 g	
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4	

## Connection




- These units monitor the AC current to a load and operate relays if the current goes below or above a set level. Front panel controls allow selection of:
  - Under and Over-current operation,
  - current trip level and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with two changeover volt-free contacts is fitted.
- Two versions for each type are available for monitoring currents of up to 1A (CROU1-28/1) and 5A (CROU1-28/5).
- The unit can be powered either by a separate auxiliary supply of 24-240V AC or DC or by the monitored supply, if suitable.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

## Device description

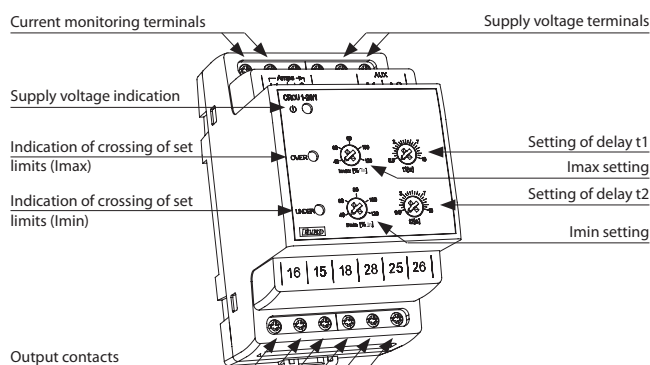

## Function

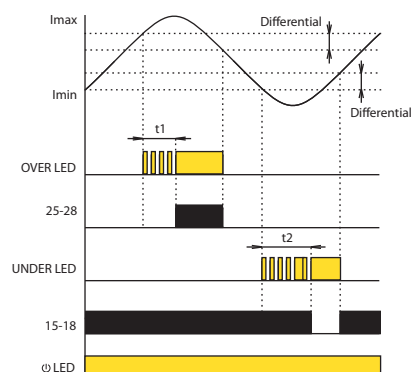




EAN code  
CRU1-18/1: 8595188142076  
CRU1-18/5: 8595188142083  
CRO1-18/1: 8595188142113  
CRO1-18/5: 8595188142120


- These units monitor the AC current to a load and operate relays if the current goes below or above a set level. Front panel controls allow selection of:
  - Under (CRU1-18) - or Over (CRO1-18)-current operation,
  - current trip level and
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. A relay with volt-free changeover contacts is fitted.
- Two versions for each type are available for monitoring currents of up to 1A (CRU1-18-1, CRO1-18/1) and 5A (CRU1-18/5, CRO1-18/5)
- The unit can be powered either by a separate auxiliary supply of 24-240V AC or DC or by the monitored supply, if suitable.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operation or maintenance of the unit.

Description

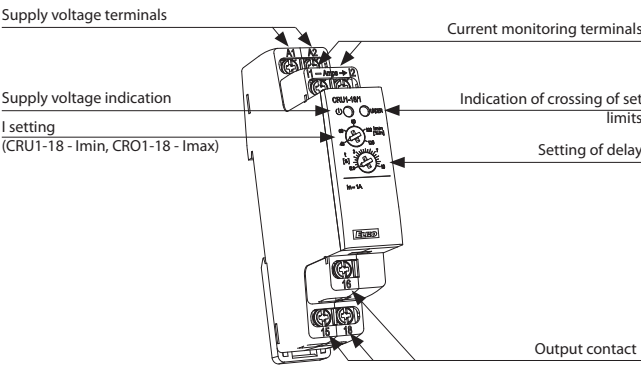


Function

CRU1-18

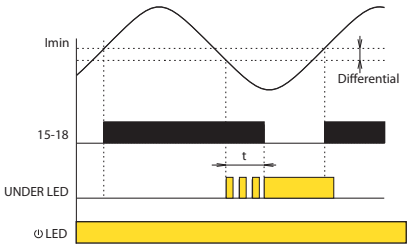

CRO1-18

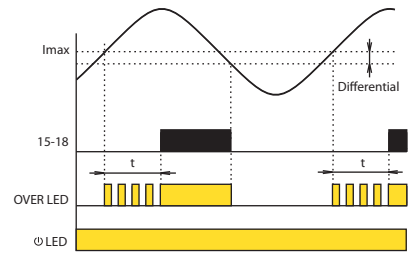

Technical parameters CRU1-18/1 CRO1-18/1 CRU1-18/5 CRO1-18/5

Monitored supply

Load current rating In:	1A	5 A
Max. overload		
- permanent:	2 A	10 A
- for 3s max:	20 A	50 A
Operating frequency:	45-65 Hz	
Current trip level – adjustable (In):	40-120% of In	
Trip time delay – adjustable:	0.5 to 10s	
Hysteresis differential:	Preset to 1% of range	

Auxiliary supply 24-240V AC or DC ±10% 1.2W/3VA


AC frequency range:	45-65 Hz
Relay contacts:	1 x changeover, volt-free, for general switching operations
Load capacity - AC:	250V @ 8A, 2 kVA
Load capacity - DC:	30V 8A
Insulation:	4 kV/1 min
Mechanical endurance:	30 x 10 <sup>6</sup> operations

Other Data


Operating temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Overvoltage category:	III
Pollution degree:	2
Environmental protection:	IP40 for front panel, IP10 for terminals
Maximum conductor size:	2 x 2.5 mm <sup>2</sup> or 1 x 4 mm <sup>2</sup>
Dimensions:	90 x 17.6 x 64 mm
Weight:	70 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4

Connection

CRU1-18



CRO1-18






EAN code  
CRGF1-28/24: 8595188142755  
CRGF1-28/240: 8595188142762

Technical parameters	CRGF1-18/240	CRGF1-18/24
Supply terminals:	A1, A2	
Monitoring terminals (for current shunt):	N, G	
External current shunt:	0.2 mΩ or 2 mΩ	
Supply voltage:	24-240VAC/DC(45-65Hz) 12 - 24V DC	
Adjustable current level:	100A, 150A, 200A, 250A, 300A, 450A, 600A, 750A, 800A, 1200A,	
Overload capacity:	max. input voltage 600V (in case of shunt failure)	
Indication of exceeding the monitored current:	60% I <sub>max</sub> - red LED TRIP 60% 100% I <sub>max</sub> - red LED TRIP 100%	
Adjustable delay:	0 s/ 0.1s/ 0.2s/ 0.4s/ 0.6s/ 0.8s/ 1s/ 2s/ 5s/ 10s*	
Response time:	max. 40ms	
Analogue output:	0 - 1mA = 0...100% set current values	
Output relay - contact:	2x switchable (AgNi) gilded	
AC contact capacity:	250V / 8 A, max. 2000VA	
DC contact capacity:	30V / 8A	
Mechanical service life:	3x10 <sup>6</sup> at rated load	
Other data		
Working temperature:	-20.. +55 °C	
Storage temperature:	-30.. +70 °C	
Dielectric strength (power supply - contact relay):	4 kV / 1min	
Excess voltage category:	III.	
Contamination degree:	2	
Protection:	IP 40 from the front panel / IP20 terminals	
Connecting conductor cross section:	max. 2 x 1.5mm <sup>2</sup> / 1 x 2.5mm <sup>2</sup>	
Dimension:	90 x 52 x 64 mm	
Weight:	128 g	125 g

\* If the set current value is exceeded 5 times the time delay is ignored.


## Connection

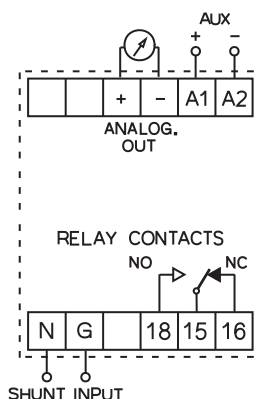


N - neutral (neutral conductor)  
G - ground (grounding conductor)

- monitors the dangerous value of the leakage ground current that can cause e.g. undesirable overheating of cables and a subsequent failure of the device or even dangerous voltage of the grounded device
- serves as protection of electrical engines, generators, transformers and other devices
- continuous monitoring of the current value using an external current shunt
- very short response time (< 40ms)
- step-adjustable value of monitored current (in 10 steps)
- step-adjustable response delay (in 10 steps)
- indication of exceeding 2 levels of monitored current (60 and 100% I<sub>max</sub>)
- selection of the value of a shunt on the device panel - 0.2 mΩ or 2 mΩ
- switching the relay mode on the device panel - LATCH ON or OFF
- RESET & TEST button for the return to the initial state or device test
- analogue output 0...1mA for the control meter
- 2 types according to the value of the supply voltage: 24 - 240V AC/DC or 12 - 24V DC
- 3-module version, mounted onto the DIN rail

## Device description

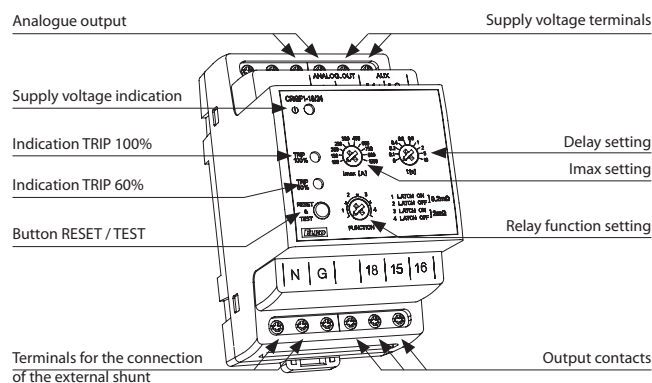

## Function

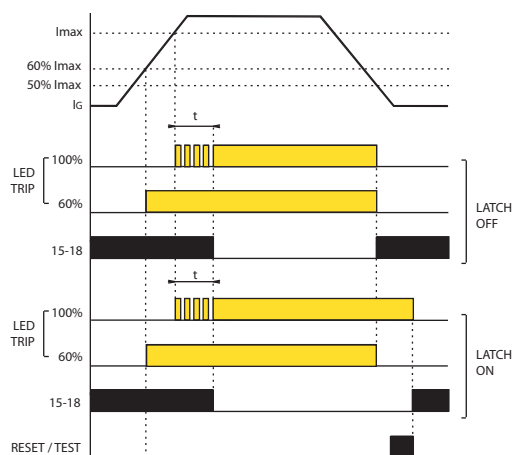




EAN code  
CRMA1-28/24: 8595188145701  
CRMA1-28/240: 8595188145718

Technical parameters	CRMA1-28/24	CRMA1-28/240
Supply voltage:	12-24V DC	24V-240V AC/DC
Burden on supply:	1W	3VA/0.9W
AC Supply frequency:	45-65 Hz	
Supply voltage tolerance:	±10%	
Monitored DC current (lin):	0-1, 0-10 and 4-20 mA	
Voltage drop across input:	1V max. at 120% lin	
Over-current range (Imax):	40-120 % lin	
Under-current range (Imin):	0-80 % lin	
Overload capacity		
- continuous:	3 x lin	
- 1s max.:	10 x lin	
Differential:	Fixed at 1% lin	
Trip time delay:	Adjustable 0.5 to 10s	
Relay contacts:	2 x changeover, volt-free, for general switching operations	
Load capacity - AC:	250 V @ 8 A, 2 kVA	
Load capacity - DC:	30 V 8A	
Insulation:	4 kV/1 min	
Mechanical endurance:	30 x 10 <sup>6</sup> operations	


Other Data		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Over-voltage category:	III	
Pollution degree:	2	
Environmental protection:	IP40 for front panel, IP20 for terminals	
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	
Dimensions:	90 x 52 x 64 mm	
Weight:	135 g	
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4	

Connection




- These units monitor a current of 0-1, 0-10 or 4-20 mA, e.g. from a transducer, and operates one of two relays if the current goes above or below set levels. Front panel controls allow selection of:
  - under- and over-current trip levels  $I_{max}$ ,  $I_{min}$
  - nominal rated current of 0-1, 0-10 or 4-20 mA (lin)
  - time delay before a trip triggers a relay response.
- LEDs indicate power on and trip status. Two changeover, volt-free relays are fitted.
- Two types are available - a 12-24 unit powered from 12-24V DC and a 24-240 unit powered from 24V-240V AC or DC
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.


Device description

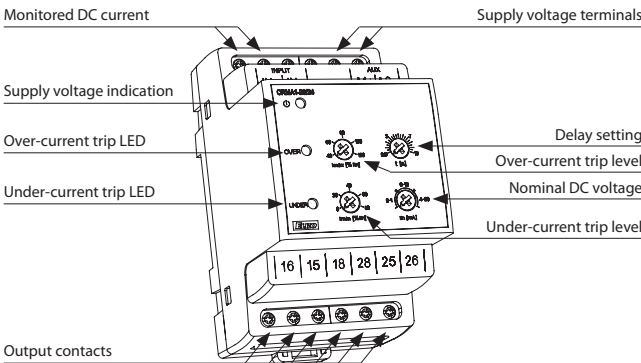

Function

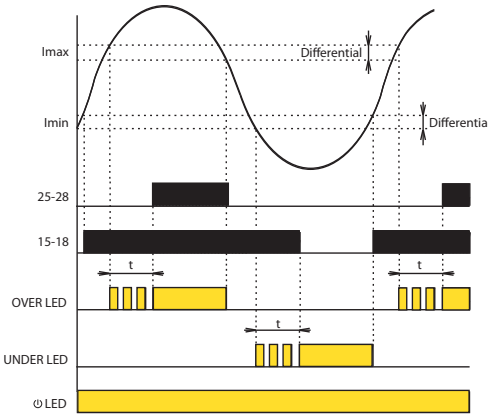



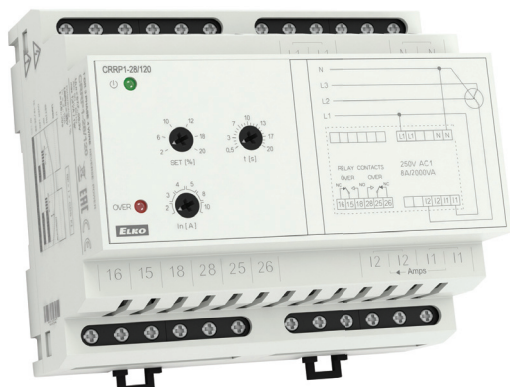

EAN code

CRRP1-28/120: 8595188145725

CRRP3-28/120: 8595188142670

CRRP1-28/240: 8595188142656

CRRP3-28/240: 8595188142687

CRRP1-28/480: 8595188142663


CRRP3-28/480: 8595188142694

Technical parameters	120	240	480
Voltage range (Vnom):			
CRRP1-28 ph-N	57.7-69.3	100-139	220-277
CRRP3-28 ph-ph	100-120	173-240	380-480
Overload			
- cont.: CRRP1-28	87 V	174 V	346 V
CRRP3-28	150 V	300 V	600 V
- 10s max: CRRP1-28	104 V	209 V	416 V
CRRP3-28	180 V	360 V	720 V
Max. power input (VA/W):			
CRRP1-28	1.4/1	1.6/1.3	2.9/2.1
CRRP3-28	2.5/1.5	4.2/3.2	6/4
Min supply voltage (Uopen):			
CRRP1-28	35 V	60 V	132 V
CRRP3-28	3x 60 V	3x 104 V	3x 228 V
Nominal currents In:	2A, 3A, 4A, 5A, 8A, 10A		
Operating frequency:	45-65 Hz		
Monitored current range:	2..100% In		
Monitored cos Φ range:	0.2 inductive to 0.2 capacitive		
Reverse power setpoint range:	2..20% (cos Φ =1)		
Differential:	fixed at 1%		
Trip delay t:	Adjustable 0.5 - 20s		
Relay contacts:	2 x changeover, volt-free, for general switching operations		
Load capacity - AC:	250 V @ 8 A, 2 kVA		
Load capacity - DC:	30 V 8A		
Insulation:	4 kV/1 min		
Mechanical endurance:	30 x 10 <sup>6</sup> operations at rated load		

#### Other Data


Operating temperature:	-20 to +55 °C		
Storage temperature:	-30 to +70 °C		
Over-voltage category:	III		
Pollution degree:	2		
Environmental protection:	IP40 for front panel, IP20 for terminals		
Maximum conductor size:	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>		
Dimensions:	90 x 105 x 64 mm		
Weight:			
CRRP1-28	199 g	199 g	203 g
CRRP3-28	201 g	204 g	211 g
Standards:	EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4		

#### Function

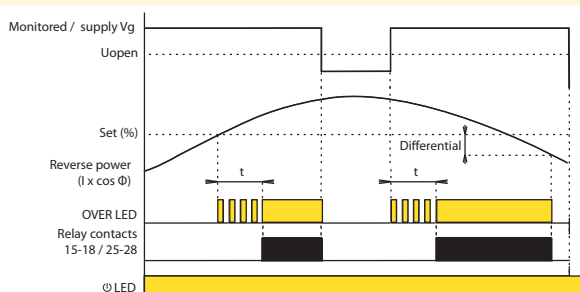


- This unit monitors a single- or three-phase supply for reverse power and trips a relay if it detects reverse power ( $I \times \cos \Phi$ ) over a set limit. The relay output is typically used to prevent 'motoring' of a generator (where the generator turns the engine), which can damage the engine.
- Front panel controls allow selection of trip level, nominal operating current and trip delay. LEDs indicate power on and trip status.
- Versions are available to suit 3-phase 3-wire L-L (CRRP3-28) and 3-phase 4-wire L-N (CRRP1-28) systems.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

#### Device description

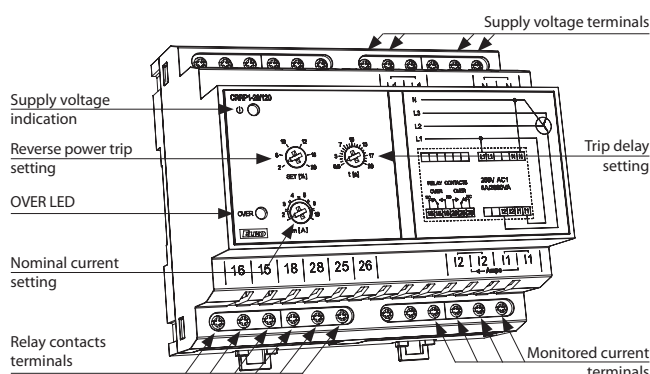


#### Connection

##### CRRP1-28

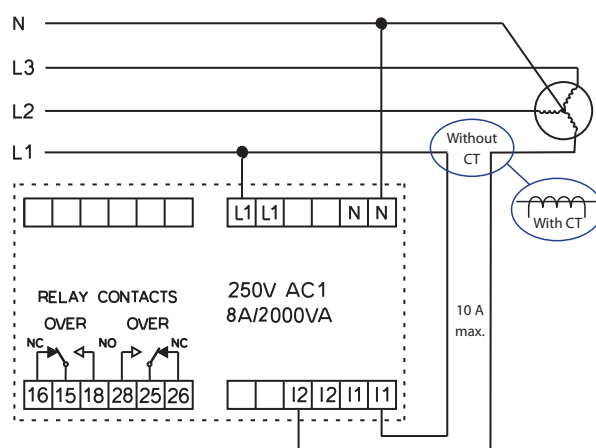

##### CRRP3-28

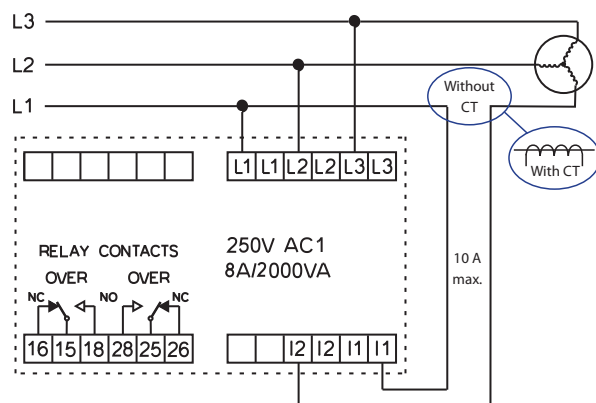



EAN code  
FRSS1-38/130: 8595188142700


Technical parameters		FRSS1-38/130
Supply voltage:		12-24 V DC
Supply voltage tolerance:		+20 / -10 %
Burden on supply:		1.4W max.
Input pulse amplitude:		5-75V p-p
Frequency range:		0-1 kHz min, 0-10 kHz max
Trip settings:		w.r.t calibrated speed:
Cranking:		10-50%
Under-speed:		50-100%
Over-speed:		100-130%
Differential:		Fixed at 2%
Analogue (meter) output:		0-1 mA
at 100% rated speed:		0.75 mA
at 133% rated speed:		1 mA
Relay contacts:		3 x changeover, volt-free, for general switching operations
Load capacity - AC:		250 V @ 8 A, 2 kVA
Load capacity - DC:		30 V 8A
Insulation:		4 kV/1 min
Mechanical endurance:		30 x 10 <sup>6</sup> operations
Other Data		
Operating temperature:		-20 to +55 °C
Storage temperature:		-30 to +70 °C
Over-voltage category:		III
Pollution degree:		2
Environmental protection:		IP40 for front panel, IP20 for terminals
Maximum conductor size:		2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Dimensions:		90 x 52 x 64 mm
Weight:		133 g
Standards:		EN 60255-6, EN 60255-27, EN 61000-6-2, EN 61000-6-4

Calibration

The unit can be calibrated by supplying an appropriate input to the sensor input terminals and pressing the Adjust button for more than 3s. This input then becomes the 100% reference used by the meter.


The required sensor input can be obtained either by running the engine at the required speed or by providing a pulse input at the appropriate frequency from a pulse generator.

Connection




- This unit monitors the speed of rotating equipment using a magnetic pick-up and provides three relay outputs according to measured speeds. The pick-up could, for instance, detect teeth on a rotating gear or flywheel. The unit also provides a tachometer output for speed indication. The relay outputs can be used for alarm or control purposes. LEDs indicate power on and relay status.
- Controls on the front panel set the trip points at which the relays and LEDs operate:
  - Crank speed - set just above the speed of the crank motor.
  - Under speed - set below the normal running speed (<100%)
  - Over speed - set to the maximum permitted speed (>100%).
- The unit can be calibrated such that a standard 100% on the unit represents the required nominal engine speed.
- These instructions contain important safety information. Please read them thoroughly before commissioning, operating or maintenance of the unit.

Device description

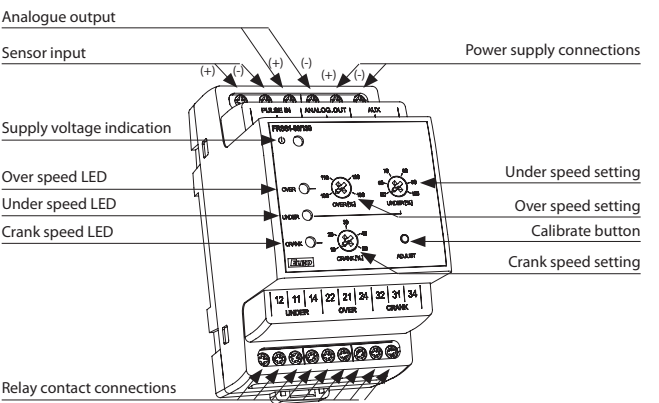

Function

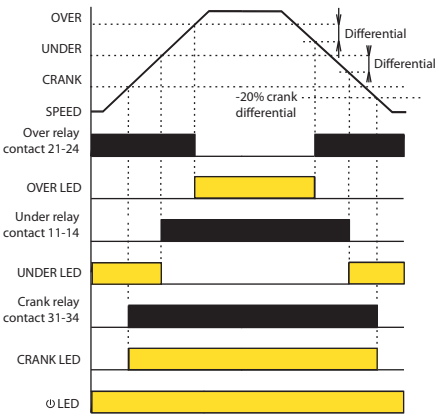

## Installation contactors VS



### VS120

Number of contacts:  
1x20 A  
Configuration of switching and breaking contacts: 10, 01.



### VS220

Number of contacts:  
2x20 A  
Configuration of switching and breaking contacts: 20, 11, 02.



### VS420

Number of contacts:  
4x20 A  
Configuration of switching and breaking contacts: 40, 31.



### VS425

Number of contacts:  
4x25 A  
Configuration of switching and breaking contacts:  
40, 31, 22, 04.



### VS440

Number of contacts:  
4x40 A  
Configuration of switching and breaking contacts:  
40, 31, 22, 04.



### VS463


Number of contacts:  
4x63 A  
Configuration of switching and breaking contacts:  
40, 31, 22.

## Installation contactors with manual control VSM



### VSM220

Number of contacts:  
2x20 A  
Configuration of switching and breaking contacts: 20, 11, 02.



### VSM425

Number of contacts:  
4x25 A  
Configuration of switching and breaking contacts:  
40, 31, 22, 04.

## Accessories



### VSK-11


Auxiliary contacts:  
1x switching,  
1x breaking.



### VSK-20

Auxiliary contacts:  
2x switching.

# VS120, VS220, VS420, VS425, VS440, VS463 | Installation contactors

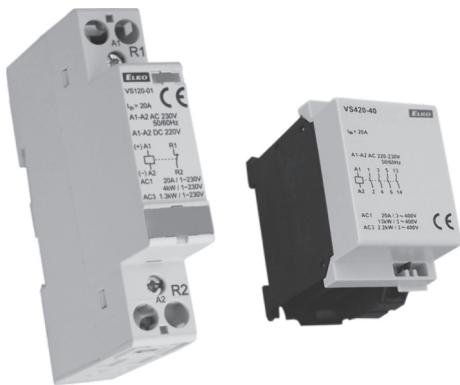

EAN code  
see page 148

- For switching electric circuits, especially for resistive loads and three-phase induction motors:  
number of contacts VS120: 1  
number of contacts VS220: 2  
number of contacts VS420, VS425, VS440, VS463: 4
- It is produced in configuration of switching and breaking contacts:  
VS120: 10, 01  
VS220: 20, 11, 02  
VS420: 40, 31  
VS425: 40, 31, 22, 04  
VS440: 40, 31, 22, 04  
VS463: 40, 31, 22
- Protection IP20 - on request we deliver covers that ensure protection IP40 for all terminals.
- DIN rail or panel mounting.

Technical parameters	VS120	VS220	VS420	VS425	VS440	VS463
Rated insulation voltage (Ui):	230 V	230 V	415 V	440 V	440 V	440 V
Rated thermo-current I <sub>th</sub> (in AC):	20 A	20 A	20 A	25 A	40 A	63 A
<b>Switched operation</b>						
AC-1 for 400 V, 3 phase:	x	x	13 kW	16 kW	26 kW	40 kW
AC-1 for 230 V:	4 kW, 1 phase	4 kW, 1 phase	7.5 kW, 3 phase	9 kW, 3 phase	16 kW, 3 phase	24 kW, 3 phase
AC-3 for 400 V, 3 phase:	x	x	2.2 kW	4 kW	11 kW	15 kW
AC-3 for 230 V:	1.3 kW only NO, 1 phase	1.3 kW only NO, 1 phase	1.1 kW, 3 phase	2.2 kW, 3 phase	5.5 kW, 3 phase	8.5 kW, 3 phase
AC-7a for 400 V, 3 phase:	x	x	13 kW	16 kW	26 kW	40 kW
AC-7a for 230 V:	4 kW, 1 phase	4 kW, 1 phase	7.5 kW, 3 phase	9 kW, 3 phase	16 kW, 3 phase	24 kW, 3 phase
AC-7b for 400 V, 3 phase:	x	x	2.2 kW	4 kW	11 kW	15 kW
AC-7b for 230 V:	1.3 kW only NO, 1 phase	1.3 kW only NO, 1 phase	1.1 kW, 3 phase	2.2 kW, 3 phase	5.5 kW, 3 phase	8.5 kW, 3 phase
AC-15 for 400 V, 1 phase:	4 A	4 A	4 A	4 A	4 A	4 A
AC-15 for 230 V, 1 phase:	6 A	6 A	6 A	6 A	6 A	6 A
DC1 U <sub>e</sub> = 24 V:	20 A	20 A	20 A	25 A	40 A	63 A
DC1 U <sub>e</sub> = 110 V:	6 A	6 A	2 A	6 A	4 A	4 A
DC1 U <sub>e</sub> = 220 V:	0.6 A	0.6 A	0.5 A	0.6 A	1.2 A	1.2 A
Loadability of modular contactors see page 147						
The max. number of switching for max. load:	600 switch/hr.	600switch/hr.	600 switch/hr.	600 switch/hr.	600 switch/hr.	600 switch/hr.
<b>Electrical life in 230 / 400 V</b>						
AC-1- resistive load :	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.1x10 <sup>6</sup>	0.1x10 <sup>6</sup>
AC-3-power load:	0.3x10 <sup>6</sup>	0.3x10 <sup>6</sup>	0.3x10 <sup>6</sup>	0.5x10 <sup>6</sup>	0.15x10 <sup>6</sup>	0.15x10 <sup>6</sup>
AC-5a - high-intensity discharge lamp:	0.1x10 <sup>6</sup> by 30 µF	0.1x10 <sup>6</sup> by 30 µF	0.3x10 <sup>6</sup> by 36 µF	0.1x10 <sup>6</sup> by 36 µF	0.1x10 <sup>6</sup> by 220 µF	0.1x10 <sup>6</sup> by 330 µF
AC-5b - incandescent lamps :	0.1x10 <sup>6</sup> by 2 kW	0.1x10 <sup>6</sup> by 2 kW	0.1x10 <sup>6</sup> by 2 kW	0.1x10 <sup>6</sup> by 2 kW	0.1x10 <sup>6</sup> by 4 kW	0.1x10 <sup>6</sup> by 5 kW
AC-7a - resistive household devices:	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>	0.1x10 <sup>6</sup>	0.1x10 <sup>6</sup>
AC-7b - inductive household devices:	0.3x10 <sup>6</sup>	0.3x10 <sup>6</sup>	0.3x10 <sup>6</sup>	0.3x10 <sup>6</sup>	0.15x10 <sup>6</sup>	0.15x10 <sup>6</sup>
Minimal load:	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 24 V, ≥ 100 mA
Short circuit protection with the fuse char. aM:	20 A	20 A	20 A	25 A	63 A	80 A
Coordination Type according EN 60 947-4-1:	2	2	2	2	2	2
Electrical strength:	4 kV	4 kV	4 kV	4 kV	4 kV	4 kV
<b>Contacts - max. cable size</b>						
Solid conductor:	AWG 7 (10 mm <sup>2</sup> )	AWG 7 (10 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )	AWG 7 (10 mm <sup>2</sup> )	AWG 3 (25 mm <sup>2</sup> )	AWG 3 (25 mm <sup>2</sup> )
Stranded conductor:	6 mm <sup>2</sup>	6 mm <sup>2</sup>	2.5 mm <sup>2</sup>	6 mm <sup>2</sup>	16 mm <sup>2</sup>	16 mm <sup>2</sup>
Maximal torque:	1.2 Nm	1.2 Nm	1.2 Nm	1.2 Nm	3.5 Nm	3.5 Nm
<b>Coil - max. cable size</b>						
Solid conductor:	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )
Stranded conductor:	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
Max. torque:	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
<b>Operating</b>						
Coil control voltage:	AC/DC 24 V, 230 V	AC/DC 24 V, 48 V, 110 V, 230 V	AC 12 V, 24 V, 48 V, 110 V, 230 V	AC/DC 24 V, 48 V, 110 V, 230 V	AC/DC 24 V, 110 V, 230 V	AC/DC 24 V, 48 V, 110 V, 230 V
Coil permanent supply +/- 10 %:	2.1 VA/2.1 W	2.1 VA/2.1 W	5 VA/1.5 W	2.6 VA/2.6 W *	5 VA/5 W	5 VA/5 W
Coil gear supply +/- 10 %:	2.1 VA/2.1 W	2.1 VA/2.1 W	30 VA/25 W	2.6 VA/2.6 W *	5 VA/5 W	5 VA/5 W
Mounting side-by-side:	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**
Operational temperature:	-5 ... +55 °C (23.. 131 °F)					
Storing temperature:	-30... +80 °C (-22.. 176 °F)					
Weight:	120 g (4.2 oz.)	130 g (4.6 oz.)	170 g (6 oz.)	213 g (7.5 oz.)	400 g (14 oz.)	400 g (14 oz.)
Dimensions:	17.5 x 85 x 60 mm (0.7"x 3.35"x 2.4")	17.5 x 85 x 60 mm (0.7"x 3.35"x 2.4")	35 x 62.5 x 57 mm (1.4"x 2.7"x 2.24")	35 x 85 x 60 mm (1.4"x 3.35"x 2.4")	53.3 x 84 x 60 mm (2.1"x 3.31"x 2.4")	53.3 x 84 x 60 mm (2.1"x 3.31"x 2.4")
Standards:	IEC 60947-4-1, IEC 60947-5-1, IEC 61095, EN 60947-4-1, EN 60947-5-1, EN 61095, VDE 0660					


\* 3.8 VA/3.8 W for -04 version of contacts

\*\* Note: In case several contactors are mounted close to each other, you need to use a installation spacer between every other contactor.

VS120-10

1 A1+



2 A2-



VS220-20


1 3 5 A1 +

2 4 6 A2 -






VS420-40

1 3 5 7 13 A1  
2 4 6 8 14 A2

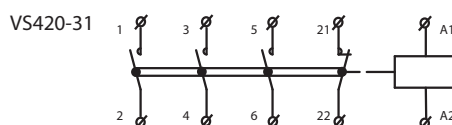




VS425-40

Diagram showing the wiring configuration for VS425-40. It includes 8 twisted pairs (1-8) and a shield (A1+, A2-). The pairs are connected to a central block, likely representing a connector or patch panel.

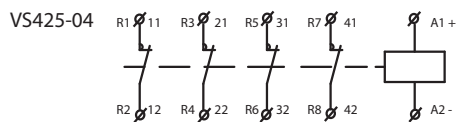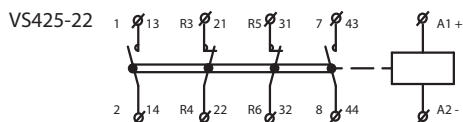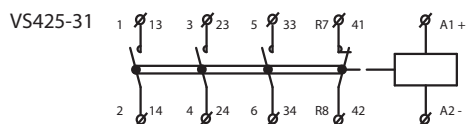

VS440-40



The diagram shows a cable assembly with 14 twisted pairs and two shielded pairs. The twisted pairs are numbered 1 through 14, with pairs 1, 3, 5, and 7 on the top half and pairs 2, 4, 6, and 8 on the bottom half. Pairs 9 through 14 are not shown. The shielded pairs are labeled A1 and A2. The cable is connected to a rectangular connector block.

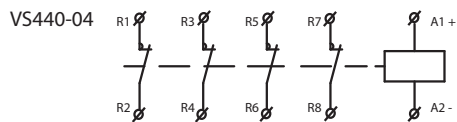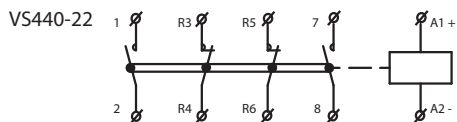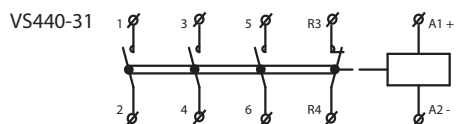

VS463-40


1 3 5 7 (13) A1

2 4 6 8 (14) A2

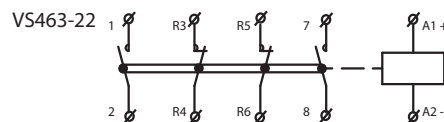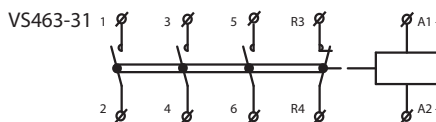

Ambient temperature:	-5 °C to +55 °C (23 °F to 131 °F)
Rated insulation voltage (Ui):	500 V
Electrical strength:	4 kV
Rated current 230 V (AC 15):	6 A
Rated current 400 V (AC 15):	4 A
Max. switching frequency:	6 A
The max. number of switching for max. load:	600 sep./hod.
Minimal load:	≥ 12 V, ≥ 10 mA
Short circuit protection with the fuse char. aM:	6 A
Solid/ Stranded conductor (max):	2.5 mm <sup>2</sup> / 2.5 mm <sup>2</sup> (AWG 10)
Maximal torque:	0.8 Nm
Weight:	10 g (0.35 oz.)
Dimensions:	10 x 85 x 60 mm (0.4" x 3.35" x 2.4")

EAN code  
see page 148

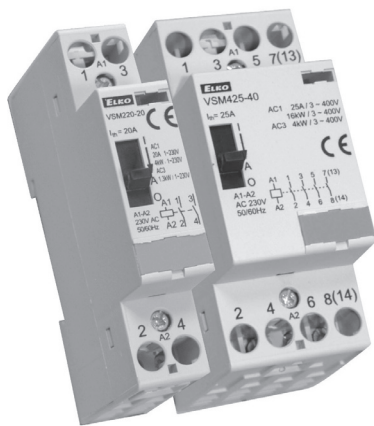

EAN code  
see page 148


Technical parameters	VSM220	VSM425
Rated insulation voltage (Ui):	230 V	440 V
Rated thermo-current I <sub>th</sub> (in AC):	20 A	25 A
<b>Switched operation</b>		
AC-1 for 400 V:	x	16 kW, 3 phase
AC-1 for 230 V:	4 kW, 1 phase	9 kW, 3 phase
AC-3 for 400 V:	x	4 kW, 3 phase
AC-3 for 230 V:	1.3 kW only NO, 1 phase	2.2 kW, 3 phase
AC-7a for 400 V:	x	16 kW, 3 phase
AC-7a for 230 V:	4 kW, 1 phase	9 kW, 3 phase
AC-7b for 400 V:	x	4 kW, 3 phase
AC-7b for 230 V:	1.3 kW only NO, 1 phase	2.2 kW, 3 phase
AC-15 for 400 V:	4 A	4 A
AC-15 for 230 V:	6 A	6 A
DC1 U <sub>e</sub> = 24 V:	20 A	25 A
DC1 U <sub>e</sub> = 110 V:	6 A	6 A
DC1 U <sub>e</sub> = 220 V:	0.6 A	0.6 A
Loadability of modular contactors see page 147		
The max. number of switching for max. load:	600 switch/hr.	600 switch/hr.
<b>Electrical life in 230 / 400 V</b>		
AC-1- resistive load :	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>
AC-3-power load:	0.3x10 <sup>6</sup>	0.5x10 <sup>6</sup>
AC-5a - high-intensity discharge lamp:	0.1x10 <sup>6</sup> by 30 μF	0.1x10 <sup>6</sup> by 36 μF
AC-5b - incandescent lamps :	0.1 10 <sup>6</sup> by 1.5 kW	0.1x10 <sup>6</sup> by 1.5 kW
AC-7a - resistive household devices:	0.2x10 <sup>6</sup>	0.2x10 <sup>6</sup>
AC-7b - inductive household devices:	0.3x10 <sup>6</sup>	0.5x10 <sup>6</sup>
Minimal load:	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA
Short circuit protection with the fuse char. aM:	20 A	25 A
Coordination Type according EN 60 947-4-1:	2	2
Electrical strenght:	4 kV	4 kV
<b>Contacts - max. cable size</b>		
Solid conductor:	AWG 7 (10 mm <sup>2</sup> )	AWG 7 (10 mm <sup>2</sup> )
Stranded conductor:	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Maximal torque:	1.2 Nm	1.2 Nm
<b>Coil - max. cable size</b>		
Solid conductor:	AWG 10 (2.5 mm <sup>2</sup> )	AWG 10 (2.5 mm <sup>2</sup> )
Stranded conductor:	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
Max. torque:	0.6 Nm	0.6 Nm
<b>Operating</b>		
Coil control voltage:	AC 12 V, 24 V, 110 V, 230 V	AC 12 V, 24 V, 42 V, 230 V
Coil permanent supply +/- 10 %:	2.8 VA/1.2 W	5.5 VA/1.6 W
Coil gear supply +/- 10 %:	12 VA /10 W	33 VA/25 W
Mounting side-by-side:	max. 2 contactors*	max. 2 contactors*
Operational temperature:	-5 ... +55 °C (23.. 131 °F)	
Storing temperature:	-30... +80 °C (-22.. 176 °F)	
Weight:	140 g (4.9 oz.)	260 g (9.17 oz.)
Dimensions:	17.5 x 85 x 60 mm (0.7"x 3.35"x 2.4")	35 x 85 x 60 mm (1.4"x 3.35"x 2.4")
Standards:	IEC 60947-4-1, IEC 60947-5-1, IEC 61095, EN 60947-4-1, EN 61095, VDE 0660	

- Special version of installation contactors with not only basic functions but also with manual control.
- For switching accumulative appliances for heating and service water warming.
- Description of individual positions of manual control.
  - AUTO: common function as with installation contactors without manualcontrol.
  - 1: shifting from AUTO to 1: operational contacts are closed and back contacts are open until there is another impulse to a contactor coil.
  - 0: contacts are open (operational contact) or closed (stand-by contact) regardless voltage.
- Optical indicator: ON-OFF.
- It is produced in configuration of making and breaking contacts:
  - VSM220: 20, 11, 02
  - VSM425: 40, 31, 22, 04
- It is possible to connect auxiliary contacts VSK to contactors VSM220, VSM425.


#### Connection VSM220

VSM220 - only AC supply voltage


VSM220-20



VSM220-11




VSM220-02




#### Connection VSM425

VSM425 - only AC supply voltage


VSM425-40




VSM425-31



VSM425-22



VSM425-04



#### Auxiliary contacts VSK-11 and VSK-20

Datas of auxiliary contacts for VSK-11 and VSK-20 see page 145.

\* Note: In case several contactors are mounted close to each other, you need to use a installation spacer between every other contactor.



TYPE OF LIGHT	OPERATION (W)	I (A)	Number of lights on one contactor's contact							
			VS120	VS220	VS420	VS425	VS440	VS463	VSM220	VSM425
Incandescent lamps	60	0.26	33	33	33	33	65	85	33	33
	100	0.43	20	20	20	20	40	50	20	20
	200	0.87	10	10	10	10	20	25	10	10
	500	2.17	3	3	3	3	8	10	3	3
	1000	4.35	1	1	1	1	4	5	1	1
Flourescent lamps	18	0.37	22	22	22	24	90	140	22	24
	24	0.35	22	22	22	24	90	140	22	24
	36	0.43	17	17	17	20	65	95	17	20
	58	0.67	14	14	14	17	45	70	14	17
Flourescent lamps lead-lag circuit	18	0.11	2 x 30	2 x 30	2 x 30	2 x 40	2 x 100	2 x 150	2 x 30	2 x 40
	24	0.14	2 x 24	2 x 24	2 x 24	2 x 31	2 x 78	2 x 118	2 x 24	2 x 31
	36	0.22	2 x 17	2 x 17	2 x 17	2 x 24	2 x 65	2 x 95	2 x 17	2 x 24
	58	0.35	2 x 10	2 x 10	2 x 10	2 x 14	2 x 40	2 x 60	2 x 10	2 x 14
Flourescent lamps parallel correction	18	0.12	7	7	7	8	48	73	7	8
	24	0.15	7	7	7	8	48	73	7	8
	36	0.2	7	7	7	8	48	73	7	8
	58	0.32	4	4	4	5	31	47	4	5
Flourescent lamps with electronic ballast units (EVG)	1 x 18	0.09	25	25	25	35	100	140	25	35
	1 x 36	0.16	15	15	15	20	52	75	15	20
	1 x 58	0.25	14	14	14	19	50	72	14	19
	2 x 18	0.17	12	12	12	17	50	70	12	17
	2 x 36	0.32	7	7	7	10	26	38	7	10
	2 x 58	0.49	7	7	7	9	25	36	7	9
High-pressure mercury-vapour lamps uncorrected	50	0.61	14	14	14	18	38	55	14	18
	80	0.8	10	10	10	13	29	42	10	13
	125	1.15	7	7	7	9	20	29	7	9
	250	2.15	4	4	4	5	10	15	4	5
	400	3.25	2	2	2	3	7	10	2	3
	700	5.4	1	1	1	2	4	6	1	2
	1000	7.5	1	1	1	1	3	4	1	1
High-pressure mercury-vapour lamps parallel correction	50	0.28	4	4	4	5	31	47	4	5
	80	0.41	4	4	4	5	27	41	4	5
	125	0.65	3	3	3	4	22	33	3	4
	250	1.22	1	1	1	2	12	18	1	2
	400	1.95	1	1	1	1	9	13	1	1
	700	3.45	-	-	-	-	5	7	-	-
	1000	4.8	-	-	-	-	4	5	-	-
Halogen metal vapour lamps uncorrected	35	0.53	18	18	18	22	43	60	18	22
	70	1	10	10	10	12	23	32	10	12
	150	1.8	5	5	5	7	12	18	5	7
	250	3	3	3	3	4	7	10	3	4
	400	3.5	3	3	3	3	6	9	3	3
	1000	9.5	1	1	1	1	2	3	1	1
	2000	16.5	-	-	-	-	1	1	-	-
Halogen metal-vapour lamps parallel correction	35	0.25	5	5	5	6	36	50	5	6
	70	0.45	2	2	2	3	18	25	2	3
	150	0.75	1	1	1	1	11	15	1	1
	250	1.5	-	-	-	1	6	9	-	1
	400	2.5	-	-	-	1	6	8	-	1
	1000	5.8	-	-	-	-	2	3	-	-
	2000	11.5	-	-	-	-	1	2	-	-
High-pressure sodium-vapour lamps uncorrected	150	1.8	5	5	5	6	17	22	5	6
	250	3	3	3	3	4	10	13	3	4
	400	4.7	2	2	2	2	6	8	2	2
	1000	10.3	-	-	-	1	3	3	-	1
High-pressure sodium-vapour lamps parallel correction	150	0.83	1	1	1	1	11	16	1	1
	250	1.5	-	-	-	1	6	10	-	1
	400	2.4	-	-	-	-	4	6	-	-
	1000	6.3	-	-	-	-	2	3	-	-
Low-pressure sodium-vapour lamps uncorrected	18	0.35	22	22	22	27	71	90	22	27
	35	1.5	7	7	7	9	23	30	7	9
	55	1.5	7	7	7	9	23	30	7	9
	90	2.4	4	4	4	5	14	19	4	5
	135	3.5	3	3	3	4	10	13	3	4
	180	3.3	3	3	3	4	10	13	3	4
Low-pressure sodium-vapour lamps parallel correction	18	0.35	6	6	6	7	44	66	6	7
	35	0.31	1	1	1	1	11	16	1	1
	55	0.42	1	1	1	1	11	16	1	1
	90	0.63	1	1	1	1	8	12	1	1
	135	0.94	-	-	-	-	4	7	-	-
	180	1.16	-	-	-	-	5	8	-	-

EAN codes for VS

VS120	VS220	VS420
VS120-01 24V AC/DC: 8595188129848	VS220-02 24V AC/DC: 8595188129381	VS420-31 24V AC: 8595188129442
VS120-01 230V AC/DC: 8595188123105	VS220-02 110V AC/DC: 8595188138628	VS420-31 110V AC: 8595188129466
	VS220-02 230V AC/DC: 8595188121422	VS420-31 230V AC: 8595188121446
VS120-10 24V AC/DC: 8595188129367		
VS120-10 230V AC/DC: 8595188123112	VS220-11 24V AC/DC: 8595188129374	VS420-40 12V AC: 8595188129459
	VS220-11 48V AC/DC: 8595188129398	VS420-40 24V AC: 8595188129435
	VS220-11 110V AC/DC: 8595188130790	VS420-40 48V AC: 8595188138581
	VS220-11 230V AC/DC: 8595188121408	VS420-40 230V AC: 8595188121439
	VS220-20 24V AC/DC: 8595188125253	
	VS220-20 48V AC/DC: 8595188129411	
	VS220-20 110V AC/DC: 8595188129428	
	VS220-20 230V AC/DC: 8595188121392	
VS425	VS440	VS463
VS425-04 24V AC/DC: 8595188129527	VS440-04 24V AC/DC: 8595188129299	VS463-22 24V AC/DC: 8595188129794
VS425-04 48V AC/DC: 8595188129558	VS440-04 110V AC/DC: 8595188129305	VS463-22 230V AC/DC: 8595188121514
VS425-04 110V AC/DC: 8595188160032	VS440-04 230V AC/DC: 8595188121484	
VS425-04 230V AC/DC: 8595188121682		VS463-31 24V AC/DC: 8595188129596
	VS440-22 24V AC/DC: 8595188129787	VS463-31 110V AC/DC: 8595188137904
VS425-13 230V AC/DC: 8595188129473	VS440-22 230V AC/DC: 8595188121477	VS463-31 230V AC/DC: 8595188121507
VS425-22 24V AC/DC: 8595188129541	VS440-31 24V AC/DC: 8595188129572	VS463-40 24V AC/DC: 8595188129589
VS425-22 230V AC/DC: 8595188121675	VS440-31 230V AC/DC: 8595188121460	VS463-40-48V AC/DC: 8595188160612
		VS463-40 110V AC/DC: 8595188140652
VS425-31 24V AC/DC: 8595188129497	VS440-40 24V AC/DC: 8595188129565	VS463-40 230V AC/DC: 8595188121491
VS425-31 48V AC/DC: 8595188137898	VS440-40 110V AC/DC: 8595188138567	
VS425-31 110V AC/DC: 8595188129534	VS440-40 230V AC/DC: 8595188121453	
VS425-31 230V AC/DC: 8595188121668		
VS425-40 24V AC/DC: 8595188129480		
VS425-40 48V AC/DC: 8595188136174		
VS425-40 230V AC/DC: 8595188121651		

EAN codes for VSM

VSM220	VSM425
VSM220-02 24V AC: 8595188129817	VSM425-04 24V AC: 8595188129831
VSM220-02 230V AC: 8595188128100	VSM425-04 230V AC: 8595188128155
VSM220-11 24V AC: 8595188129800	VSM425-22 24V AC: 8595188129336
VSM220-11 230V AC: 8595188128094	VSM425-22 230V AC: 8595188128148
VSM220-20 12V AC: 8595188138369	VSM425-31 24V AC: 8595188129824
VSM220-20 24V AC: 8595188128117	VSM425-31 230V AC: 8595188128131
VSM220-20 110V AC: 8595188160223	
VSM220-20 230V AC: 8595188128087	VSM425-40 12V AC: 8595188160049
	VSM425-40 24V AC: 8595188128162
	VSM425-40 230V AC: 8595188128124

EAN codes for VSK

VSK-11:	8595188121613
VSK-20:	8595188121606

This image shows a full page of blank, lined paper. It features approximately 28 horizontal grey lines spaced evenly apart, typical of standard notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings present.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Main regulations for correct use of products ..... 152

Product loadability ..... 153

Electro-magnetic compatibility of products ..... 155

EMC chart ..... 156

Overview of tested types of light sources and the loads ..... 157

Products packing ..... 158

Dimensions ..... 159

Examples of usage ..... 166

To ensure correct and perfect function of a device and its safe operation, it is necessary to ensure and observe several main regulations:

## 1. Device supply

- it is necessary to ensure continuous supply of the device without drops and voltage peaks. It is mainly important for device (e.g. dimmers) where there is synchronization managed by sine wave of the main and fault in the main ca cause unreliable function of the device
- it is necessary to observe correct connection of terminals, and in case of DC supply voltage also polarity
- it is necessary to observe allowed tolerance of the size of supply voltage which is given by technical parameters of individual devices

## 2. Protection of the device

- it is necessary to ensure protection of the device by adequate elements of overvoltage protection – by fuses, by surge arrestors

## 3. Elimination of disturbances on input circuits

- it is recommended to eliminate disturbances on control inputs of devices by suitable elements (R-C elements) and thus minimize creation of inductive voltage on incoming wires
- pay attention when connecting control inputs and keep in mind max. current and min. voltage at rest, which can cause spontaneous switching of device (e.g. connected glow lamps)

## 4. Opereting conditions

- to assure the granted life and correct functions of device, there is not recommended to leave the device in extreme conditions that could negative way influence the correct device functions - permanent temperature influence over 70°C, aggressive exhalations, chemicals, high relative humidity over 95%, high electromagnetic field or microwave radiation
- for error-free function it is necessary to avoid device placement close to electromagnetic interference source
- all mentioned products fulfill the EMC requirements in accordance with EU Directive 89/336/EEC. Notwithstanding it is necessary to pay attention when devices are connected to circuit with electrical appliances that produce electromagnetic interference (contactors, motors), and pay attention to close power cables. It is recommended that device connecting cables (supply and control inputs) are possibly short and go separately from power cables. In case the device is connected to circuit with contactors or motors, it is necessary to protect the device with appropriate extern protection components - RC members, varistors or surge voltage protector.
- when you use AL wires, it is necessary to follow requirements of ČSN standard 370606: 1959 and ČSN 370606 amendment 2: 1992

## 5. Device handling and using


- input terminals do not fill-in with high power (for serial terminals max 0.5 N/m), do not give excessive pressure to carrier terminal parts to avoid damage of inner device construction
- protect the device before falls and excessive vibrations that could damage relays contacts
- do not overload input relay's contacts, especially when using loads with other category then AC1
- when at switching of big loads the relay contacts get sealed it is necessary to use inserted contactor or power relay tuned to required load for given application

## Description of used protection elements in device


All time and monitoring relays from our assortment are equipped with protective elements (varistors) against possible overvoltage in supply main. Limit voltage of used varistors is 275 V. At short-time overvoltage in supply main varistor decrease its leak resistor and accumulate arosen overvoltage. When this overvoltage behave as short-time peak, varistor is able to react and protect the device against negative influences. As other protection elements there are used transils and zener diodes that eliminate overvoltage impulses in supply and input circuits of device (e.g. when switching inductive loads). In case of switching inductive loads it is recommended to separate a supply of power element (motors, contactors etc.) from supply of measuring and control device inputs.

On the charts bellow you can see oscilographic running of disconnecting of loads (contactors) and reaction of protective elements to arosen voltage pikes.


Process of disconnection of contactor with coil on 230V/AC without R-C member

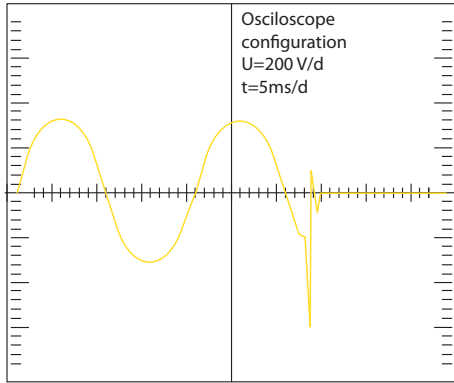





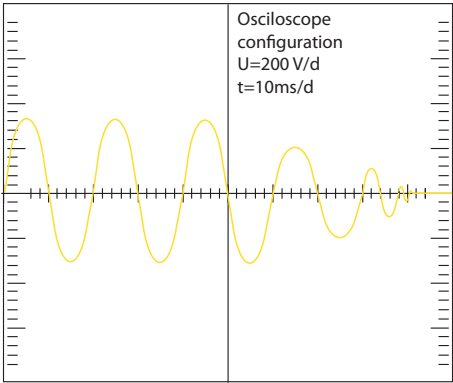












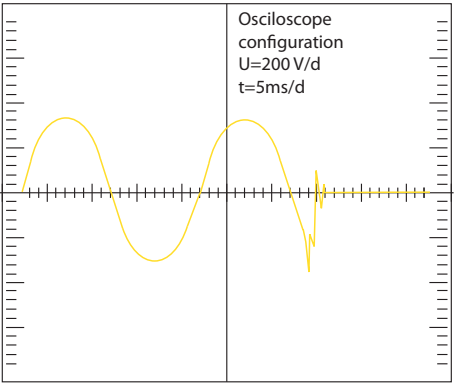
Process of disconnection of contactor with coil on 230V/AC and R-C member 390 Ohm-330 nF



Process of disconnection of contactor with coil and limited varistor on 230V/AC





PRODUCT	SOU-2	RHV-1; SOU-3; TEV-4	CRM-4; CRM-42; HRH-7; MR-41; MR-42; SHT-1; SHT-1/2; SHT-3; SHT-3/2; SHT-4; SHT-6; SMR-B; SOU-1; RHT-1; TER-3A; TER-3B; TER-3C; TER-3D; TER-3E; TER-3F; TER-3G; TER-3H; VS116K; VS116U; VS316/24V; VS316/230V	CRM-82TO; CRM-83J; CRM-93H; PRM-2H; PRM-92H; TER-7; VS308K; VS308U; CRM-61; HRH-5; HRN-54; HRN-54N; HRN-55; HRN-55N; HRN-56; HRN-57; HRN-57N; PRI-32; PRI-51; PRI-52; PRI-53; HRF-10; TER-9	HRH-6	ATC; ATF; ATR; DTC; DTF; DTR; COS-2; CRM-2H; CRM-2HE; CRM-2T; CRM-81J; CRM-91H; CRM-91HE; HRH-1; HRN-33; HRN-34; HRN-35; HRN-37; HRN-41; HRN-42; HRN-43; HRN-43N; HRN-63; HRN-64; HRN-67; PDR-2; PRI-41; PRI-42; PRM-91H; SJR-2; TER-4; TEV-1; TEV-2; TEV-3
CONTACT	Material of contact AgSnO <sub>2</sub> contact 8A	Material of contact AgSnO <sub>2</sub> contact 12A	Material of contact AgSnO <sub>2</sub> contact 16A	Material of contact AgNi contact 8A	Material of contact AgNi contact 10A	Material of contact AgNi contact 16A
TYPE OF LOAD						
 cos φ ≥ 0.95 AC1	250V / 8A	250V / 12A	250V / 16A	250V / 8A	250V / 10A	250V / 16A
 AC2	250V / 5A	250V / 3.7A	250V / 5A	250V / 3A	250V / 3A	250V / 5A
 AC3	250V / 4A	250V / 2.2A	250V / 3A	250V / 2A	250V / 2A	250V / 3A
 AC5a uncompensated	x	230V / 2.2A (510VA)	230V / 3A (690VA)	230V / 1.5A (345VA)	230V / 2A (460VA)	230V / 3A (690VA)
 AC5a compensated	x	230V / 2.2A (510VA) till max output C=14UF	230V / 3A (690VA) till max output C=14UF	x	x	x
 AC5b	250W	1 120W	1000W	300W	500W	800W
 AC6a	250V / 4A	x	x	x	x	x
 AC7b	250V / 1A	250V / 2.2A	250V / 3A	250V / 1A	250V / 2A	250V / 3A
 AC12	250V / 1A	250V / 7.5A	x	250V / 1A	250V / 6A	250V / 10A
 AC13	x	250V / 4.5A	x	x	250V / 3.8A	250V / 6A
 AC14	250V / 4A	250V / 4.5A	250V / 6A	250V / 3A	250V / 3.8A	250V / 6A
 AC15	250V / 3A	250V / 4.5A	250V / 6A	250V / 3A	250V / 3.8A	250V / 6A
 DC1	30V / 8A	24V / 12A	24V / 10A	24V / 8A	24V / 10A	24V / 16A
 DC3	30V / 3A	24V / 4.5A	24V / 3A	24V / 3A	24V / 3.8A	24V / 6A
 DC5	30V / 2A	24V / 3A	24V / 2A	24V / 2A	24V / 2.5A	24V / 4A
 DC12	30V / 8A	24V / 12A	24V / 6A	24V / 8A	24V / 10A	24V / 16A
 DC13	30V / 2A	24V / 1.5A	24V / 2A	24V / 2A	24V / 1.3A	24V / 2A
 DC14	x	24V / 1.5A	x	x	24V / 1.3A	24V / 2A

# Product loadability

Problematic choice of suitable relay contact for a particular load switched with a product is described below. Mostly we experience problems with incorrect choice of load (meaning incorrect relay for a particular load) which results in permanent switching of contact (sealing) or damage on relay contact – which then results in malfunction. What load can you use? Detailed types of load according to standard EN 60947 are described in charts below – categories of use.

Category of use	Typical use	EN
AC current, $\cos\varphi = P/S$ (-)		
AC-1	Non-inductive or slightly inductive load, resistance furnace Includes all appliances supplied by AC current with power factor ( $\cos\varphi$ ) $\geq 0.95$ Examples of usage: resistance furnace, industrial loads	60947-4
AC-2	Motors with slip-ring armature, switching off	60947
AC-3	Motors with short-circuit armature, motor switching when in operation This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current which is 5 up to 7 times rated current of motor.	60947-4
AC-4	Electro-motors with short-circuit armature: start up, braking by backset, changeover	60947
AC-5a	Switching of electrical gas-filled lights, fluorescent lights	60947-4
AC-5b	El. bulb switching Enables low contact loading due to resistance of cold fiber is many times smaller than the one of hot fiber.	60947-4
AC-6a	Switching of transformers	60947-4
AC-6b	Switching of capacitors	60947-4
AC-7a	Switching low inductive loads of home appliances and similar applications	60947
AC-7b	Load of motors for home appliances	60947
AC-8a	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-8b	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-12	Switching of semiconductor loads with separation transformers	60947-5
AC-13	Switching of semiconductor loads with separation transformers	60947-5-1
AC-14	Switching of low electro-magnetic loads (max.72 VA)	60947-5-1
AC-15	Management of alternating electro-magnetic loads This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA Use: switching coils of contactors	60947-5
AC-20	Connecting and disconnecting in unloaded states	60947-3
AC-21	Switching resistive loads, including low loading	60947-3
AC-22	Switching of mixed resistive and inductive loads, including low overloading	60947-3
AC-23	Switching of motor loads or other high inductive loads	60947-3
AC-53a	Switching of motors with short-circuit armature with semiconductor contactors	60947

Note: Category AC 15 replaces formerly used category AC 11

DC current,  $t = L/R$  (s)

DC-1	Non-inductive or low inductive load, resistive furnaces	60947-4
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-6	Non-inductive or low inductive loads, resistive furnaces – el. bulbs	60947-4-1
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element	60947-5-1
DC-13	Switching of electromagnets	60947-5-1
DC-14	Switching of electromagnetic loads in circuits with limiting resistor	60947-5-1
DC-20a(b)	Switching and breaking without load(a: frequent switching ,b: occasional switching)	60947-3
DC-21a(b)	Switching ohmic loads including limiting overloading (a: frequent switching ,b: occasional switching)	60947-3
DC-22a(b)	Switching of compound ohmic and inductive loads including limited overloads (e.g. shunt motors) (a: frequent switching, b: random switching)	60947-3
DC-23	Switching of highly inductive loads (e.g. series motors)	60947-3

How can you distinguish for which load is our product (relay) designated?

Our company record this information on a products and also in our catalogue, instruction manual and other promotional and technical material (website etc.).

It is important to realize that it is not always possible to point out load because of lack of information about the device (user cannot measure  $\cos$ ) or it is not possible because of inconstancy of parameters of switched device. Manufacturer of relays records always guaranteed parameters in ideal conditions which are done by a norm (temperature, pressure, humidity, etc.) and reality can be in a lot of cases different. Category of use (classification) of a particular relay is done by material of output contacts.


Basic types of materials which are used for production of contacts for high-performance relay are:

- a) AgCd – suitable for switching ohmic loads. Before of harmfulness of Cd, this type of contact is remitted.
- b) AgNi – designated for switching resistive loads, good quality switching and conducting (contact doesn't oxidate) small currents/voltages, it is not designated for surge currents and loads with inductive component.
- c) AgSn or AgSnO<sub>2</sub> – suitable for switching loads with inductive component, not suitable for switching small currents/voltages, it is more resistive to surge currents, suitable for DC voltage switching, less suitable for switching loads of ohmic type.
- d) Wf (wolfram)-special contact designated for switching surge currents with inductive component.
- e) with gold (AgNi/Au)- Used for "improving" contacts for low currents/ voltages , prevents oxidation.

Electromagnetic compatibility (EMC) is a new scientific field which was founded in the 60s last century. It had been known only to a small number of specialists working in a military and cosmic research.

Electromagnetic compatibility EMC is defined as an ability of a device, system or a machine to show the correct operation even in an environment in which there are other sources of electromagnetic signals (natural or artificial), and also an ability not to influence negatively the environment by its own "electromagnetic action" and not to radiate signals that would disturb other devices. It is an indicator of good quality and reliability. Breach of such EMC requirements may cause several damages with catastrophic consequences.

When testing EMC of a device or system (technical and biological), it is based on so called "fundamental chain of EMC" shown in the picture. This chain shows a system problematic of EMC and we inspect all three components.

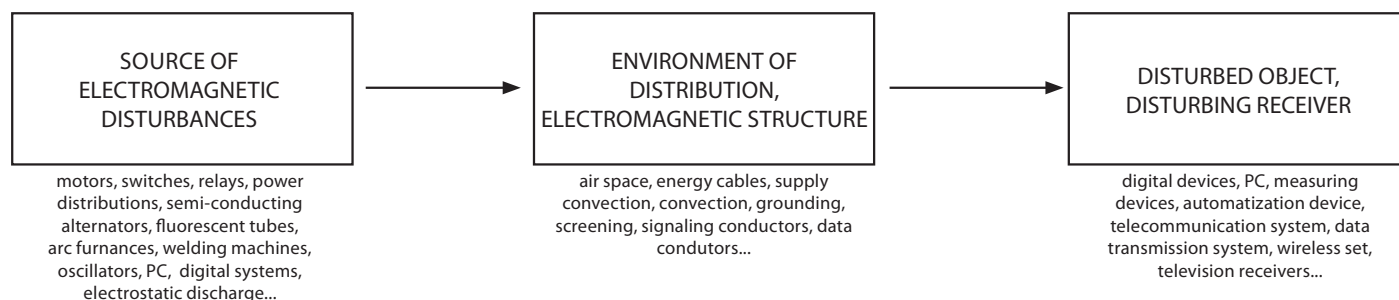

#### Test SURGE

For guarantee the immunity of our devices against to electromagnetic disturbance we are doing EMC tests and according results we are still innovating our product to be according the EMC norms with reserve.

The most important test is immunity against gust of high-energy voltage and current impulse (SURGE), what is made according the norm IEC 61000-4-5.

By this our products are controlled in case of short time pulse, what is applied as to input as to output circuits of devices, to switching inputs, sensing inputs, etc. Our products pass all criteria and are fully competitive to foreign products.

Test SURGE is used in practice mainly for 1-phase devices with take-off current to 16 A. It makes use of voltage impulse 1,2/50 ms no load and current impulse 8/20 ms for short time. Size of used voltage impulse is 0.5 kV, 1 kV, 2 kV and 4 kV, size of used current impulse is 2kA on 4kV with choice of changing polarity. For testing by impulses is as coup mode specify capacitive coupling.

#### Test BURST

Other very important test is test immunity against quick short-lived effect (couple of impulses- BURST), which dissimulated influence if industry disturbance. Test is made according to the norm IEC 61000-4-4.

Disturbance signal is injected to supply circuits and communication cabling. Coupling is made by 1-phase capacitive circuit or coupling capacitive ribband to supply, signalling or data convection of tested device. Size of testing impulses is 0.5 kV, 1 kV, 2 kV and 4 kV in positive and negative polarity. Repeat frequency is 2.5 kHz, or 5 kHz. Period of testing 0 - 6 minut by steps for 0.1s.

#### Test POWERFAIL

For right function of products in industry is important POWERFAIL test - simulation of decreasing and failure of supply voltage. It is made according to the IEC 61000-4-11.

Short-time supply decreasing are random decreasing of supply voltage, which are more than 10 - 15 % of its nominal size and have short time existing 0.5 - 50 periodes of basic frequency 50 Hz.

Short breaks of voltage are short time decreasing over 100 %. Mentioned changes of supply circuit voltage are made in practise by disturbance in mains (high voltage, low voltage) and breaks on load of the main.

#### Test of EMC emissions

Electronic devices must be designed not to be a source of oversize electric or electromagnetic disturbances in its surroundings. Test is executed according to standard EN 55022. Emissions are measured by wires or by air.

#### Test of electromagnetic high-frequency field and HF signal coming from the main

The purpose of this test is to verify immunity of the device against electromagnetic fields that are created by radio transmitters or by any other device which transmits electromagnetic energy by uninterrupted waves (walkie-talkies, radio and TV transmitters.)

Test is carried out against disturbances in the main and emissions. We apply testing level 3 which for HF field means intensity of field 10 V/m and for HF signal it is voltage level 10 V.

#### Test of electrostatic discharge

It is a test of resistance against discharges of electrostatic energy caused by servicing or by surrounding objects. Such discharge can damage a device or its components.

Test is carried out by direct or indirect application of discharges to a tested device. Test is carried out according to a standard EN 61000-4-2. Direct influence of discharges is targeted into such places and surfaces that are accessible to servicing during common use. Indirect influence of discharge is done by horizontal and vertical coupling board.

The device is treated by at least ten individual discharges for positive and negative polarity. Testing levels are 2kV, 4kV, 6kV, 8kV, 15kV.

Company ELKO EP has its own test laboratory in which it carries out pre-certification for conditions that must be met by each of our products. Thus customers gets not only a product of a high quality, which is ensured by many years of experience in the field of switching relays, but also a product which can operate in demanding conditions of industrial environment. Product, tested this way, guarantees reliability and functionality to customer's full satisfaction.






EMC - parameters

PRODUCT	STANDARD		
	levels according to ČSN EN 61000-4-4	levels according to ČSN EN 61000-4-5	EMC; EMISE according to norm ČSN EN
Time relays			
CRM-81J/230V	3	3	55022/A
CRM-81J/UNI	3	3	55022/A
CRM-83J/230V	3	3	55022/A
CRM-83J/UNI	3	3	55022/A
CRM-82TO	3	3	55022/A
SJR-2/230V	3	3	55022/B
SJR-2/UNI	3	3	55022/A
CRM-2T/230V	3	3	55022/B
CRM-2T/UNI	3	3	55022/A
CRM-2H/230V	3	3	55022/A
CRM-2H/UNI	3	3	55022/A
CRM-91HE/UNI	3	3	55022/A
CRM-2HE/UNI	3	3	55022/A
CRM-91H/230V	3	3	55022/B
CRM-91H/UNI	3	3	55022/A
CRM-93H/230V	3	3	55022/B
CRM-93H/UNI	3	3	55022/A
CRM-9S	-	3	61000-6-3
CRM-61	3	2	61000-6-3
SHT-1	3	3	55022/A
SHT-1/2	3	3	55022/A
SHT-3	3	3	55022/A
SHT-3/2	3	3	55022/A
PDR-2A/230V	2	3	61000-6-3
PDR-2A/UNI	3	3	61000-6-3
PDR-2B/230V	2	3	61000-6-3
PDR-2B/UNI	3	3	61000-6-3
PRM-91H/8	3	3	55022/B
PRM-91H/11	3	3	55022/B
PRM-92H	2	3	55022/A
PRM-2H	2	3	55022/A
SMR-T	2	2	61000-6-3
SMR-H	2	2	55022/A
SMR-B	2	2	61000-6-3
CRM-4	3	3	55022/B
CRM-42	3	3	55022/A
Power and auxiliary relays			
VS116K	3	3	55022/A
VS116U	3	2	55022/A
VS308K/230V	3	3	61000-6-3
VS308K/UNI	3	2	55022/B
VS308U	3	2	55022/A
VS316/24V	3	-	-
VS316/230V	3	3	55022/B
Dimmers			
DIM-2	2	2	61000-6-3
DIM-5	2	2	61000-6-3
DIM-14	2	2	55022/B
DIM-6	2	2	55014-1
DIM6-3M-P	2	2	55014-1
DIM-15	2	2	55014-1
SMR-S	2	2	55022/A
SMR-U	2	2	55022/B
LIC-1	2	2	550015

PRODUCT	STANDARD		
	levels according to ČSN EN 61000-4-4	levels according to ČSN EN 61000-4-5	EMC; EMISE according to norm ČSN EN
Power supplies			
PS-10-12; PS-10-24	3	3	55022/B
PS-30-12; PS-30-24	3	3	55022/B
PS-100-12; PS-100-24	3	3	55022/B
PS-30R	3	3	55022/A/B
ZSR-30	3	3	61000-6-3
ZNP-10-12V	-	3	55022/B
ZNP-10-24V	-	3	55022/B
Other modular devices			
SOU-1/230V	3	3	61000-6-3
SOU-1/UNI	3	2	55022/A
SOU-2	3	3	61000-6-3
SOU-3	3	3	55022/B
MR-41/230V	3	3	55022/A
MR-41/UNI	3	3	55022/A
MR-42/230V	3	3	55022/A
MR-42/UNI	3	3	55022/A
Monitoring relays			
HRN-41	3	3	61000-6-3
HRN-42	3	3	61000-6-3
HRN-33	3	3	55022/A
HRN-34	3	-	-
HRN-35	3	3	55022/A
HRN-37	3	3	55022/A
HRN-63	3	3	55022/A
HRN-64	3	-	-
HRN-67	-	-	-
HRN-55	3	3	55022/B
HRN-55N	3	3	55022/B
HRN-57	3	3	55022/B
HRN-57N	3	3	55022/B
HRN-54	3	3	55022/B
HRN-54N	3	3	55022/B
HRN-56/120	3	3	55022/B
HRN-56/208	3	3	55022/B
HRN-56/240	3	3	55022/B
HRN-56/400	3	3	55022/B
HRN-56/480	3	3	55022/A
HRN-56/575	3	3	55022/A
HRN-43	3	3	55022/A
HRN-43N	3	3	55022/A
PRI-32	3	3	61000-6-3
PRI-51/1	3	3	61000-6-3
PRI-51/2	3	3	61000-6-3
PRI-51/5	3	3	61000-6-3
PRI-51/8	3	3	61000-6-3
PRI/16	3	3	61000-6-3
PRI-51/0.5	3	-	-
PRI-52	3	3	55022/A
PRI-41	3	3	61000-6-3
PRI-42	3	3	61000-6-3
HRN-1/230V	3	3	55022/A
HRH-1/24V	3	3	55022/A
HRN-1/110V	3	3	55022/A
HRN-5	3	3	61000-6-3

PRODUCT	STANDARD		
	levels according to ČSN EN 61000-4-4	levels according to ČSN EN 61000-4-5	EMC; EMISE according to norm ČSN EN
HRH-4/230V	3	3	55022/B
HRH-4/24V	3	3	55022/B
HRH-6/AC	3	3	61000-6-3
HRH-6/DC	3	-	-
COS-2	3	3	55022/A
Thermostats			
TER-3A	3	3	55022/B
TER-3B	3	3	61000-6-3
TER-3C	3	3	55022/B
TER-3D	3	3	61000-6-3
TER-3E	3	3	55022/B
TER-3F	3	3	55022/B
TER-3G	3	3	55022/B
TER-3H	3	3	55022/B
TER-4/230V	3	3	55022/B
TER-4/24V	3	3	-
TER-9/230V	3	3	55022/B
TER-9/24V	3	3	-
TER-7	3	3	55022/B
ATR; ATC; ATF	2	2	55022/B
DTR; DTC; DTF	2	2	55022/B
TEV-1	3	3	55022/B
TEV-2	3	3	55022/B
TEV-3	3	3	55022/B
TEV-4	3	3	55022/B
RHT-1	3	3	55022/B
RHV-1	3	3	55022/B

As is our good tradition, we have always been seeking for a maximum universality of our products. We have successfully developed a dimmer DIM-15 and SMR-M, and because the LED lighting dimming - as well as dimming of energy saving lamps - is a relatively new area and there are not so many manufacturers who produce dimmable energy saving resources, we will gradually test and expand the chart below. We welcome your feedback and cooperation in addressing us your comments and new types.

Type	Light sources ELKO Lighting	Socket	Dimmable	The maximum number of units can be connected to dimmers				
				SMR-M	LIC-1	DIM-14	DIM-15	DIM-6
 DLB-E27-806-2K7	DLB-E27-806-2K7	E27	yes	11	21	36	21	145
 DLB-E27-806-5K	DLB-E27-806-5K	E27	yes	11	21	36	21	145
 DLSL-GU10-350-3K	DLSL-GU10-350-3K	GU10	yes	25	45	74	45	300
 LSL-GU10-350-3K	LSL-GU10-350-3K	GU10	yes	13	25	40	25	165
 LSL-GU10-350-5K	LSL-GU10-350-5K	GU10	yes	13	25	40	25	165

Please note:

May lead to different results based on the state of network cable length and other factors.

This table contains the results of tests that were conducted internally and therefore is ONLY for customers only informative.

The products were tested in test laboratories ELKO EP, and therefore the company assumes no responsibility for any imitation test environment.

## Support of project design

Our aim is to give a complete care to all electro project designers.

**Our activities:**

Our products are a part of the following programs:

### Project programs













### Award programs











### MARKS AND SYMBOLS DWG





### Training

In case our products attracted your interest, do not hesitate to contact us at [elko@elkoep.com](mailto:elko@elkoep.com) or see our websites [www.elkoep.com](http://www.elkoep.com) for more information.

### Technical support

In case of any questions regarding use of our products for a particular project, contact us at [support@elkoep.com](mailto:support@elkoep.com).

Note.: logos, names, software, hardware are protected by owner's rights.



Packing of plug - in relay - 2 pcs



Packing of 2-MODULE relay - 1 pc



Packing of 3-MODULE relay - 1 pc



Packing of 1-MODULE relay - 1 pc



Packing of 1-MODULE relay - 10 pcs




Packing of 1-MODULE relay with accessories







1-MODULE DESIGN

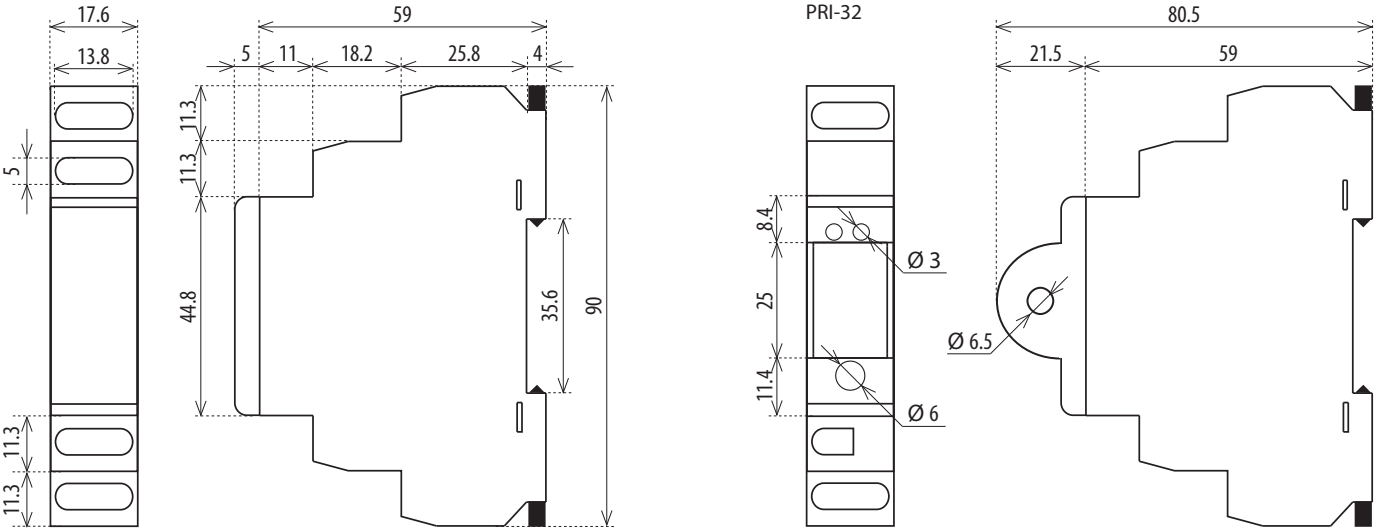


front panels 1-MODULE, examples of use:

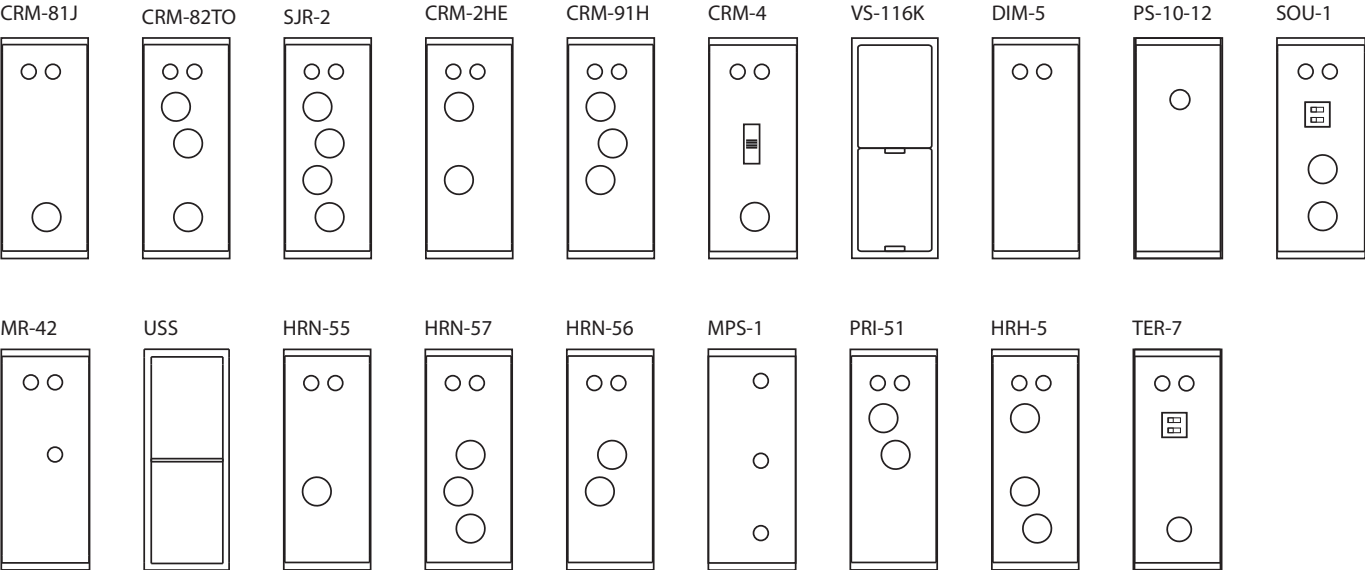


2-MODULE DESIGN

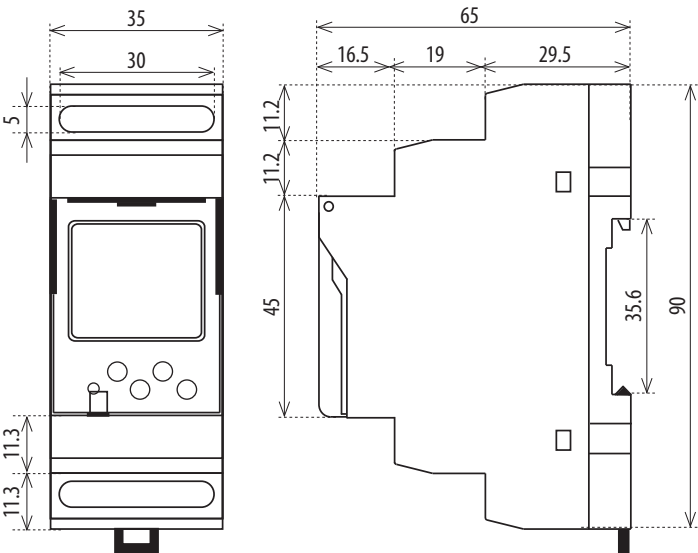








Temperature sensor

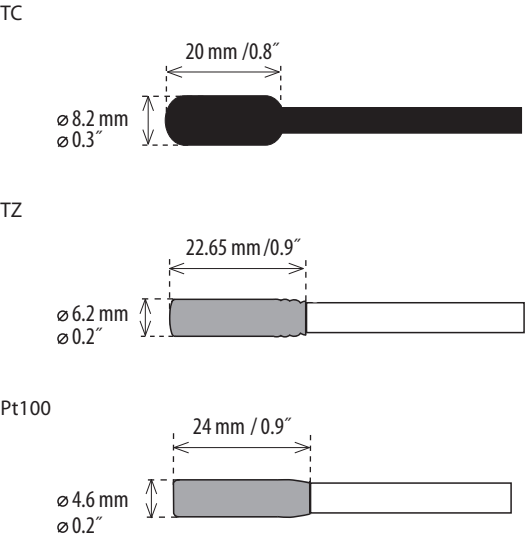


3-MODULE DESIGN

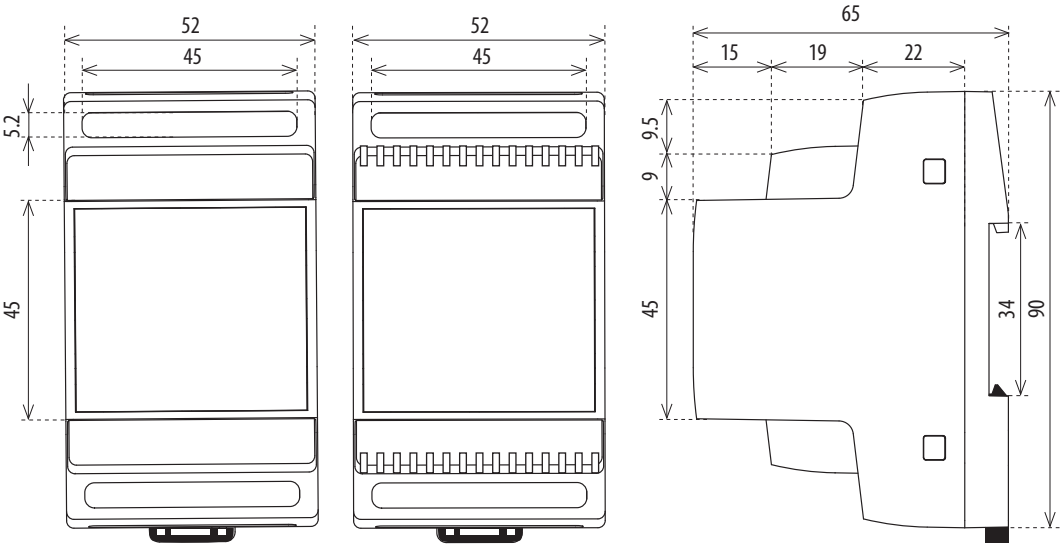





front panels 3-MODULE,  
examples of use:




6-MODULE DESIGN

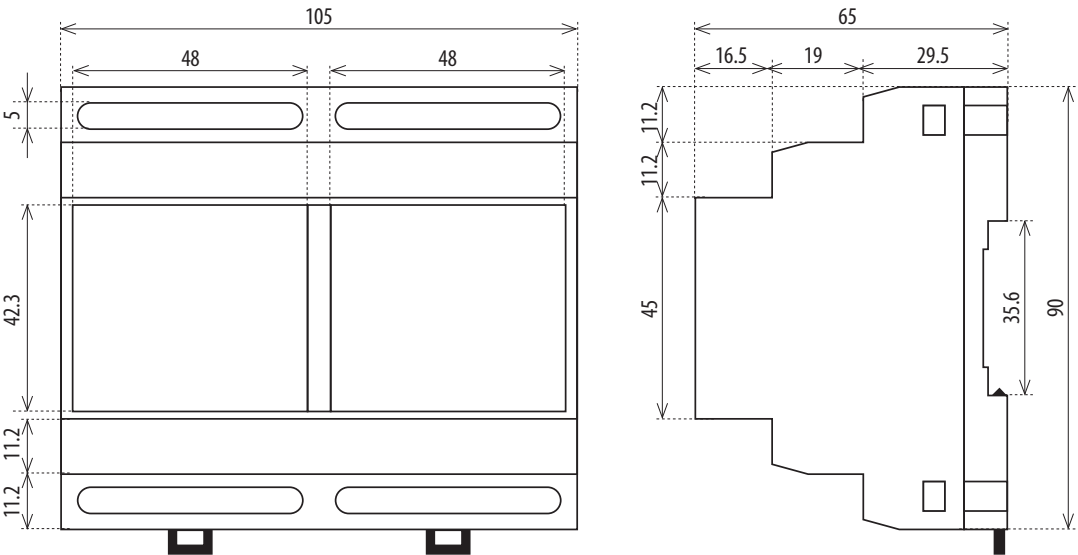


front panels 6-MODULE, examples of use:




SMR-T, SMR-H, SMT-K




SMR-S, SMR-U




SMR-B

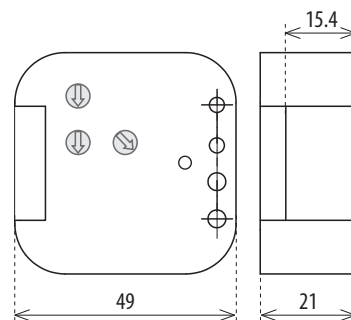


VS116/B

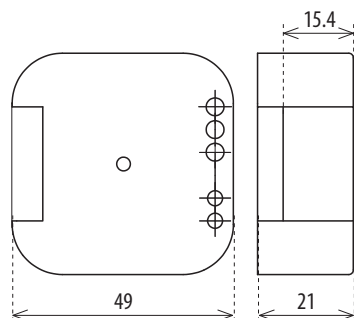


SMR-M

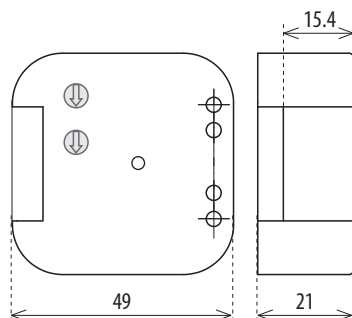


PSB

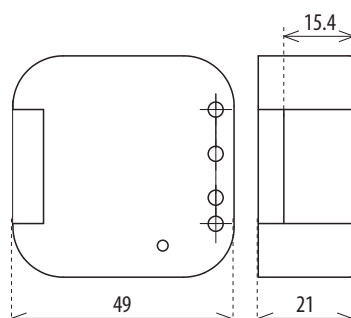


ATR, ATF, ATC

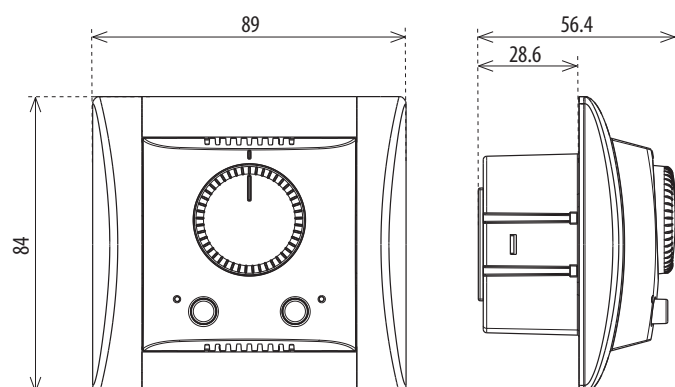


DTR, DTF, DTC






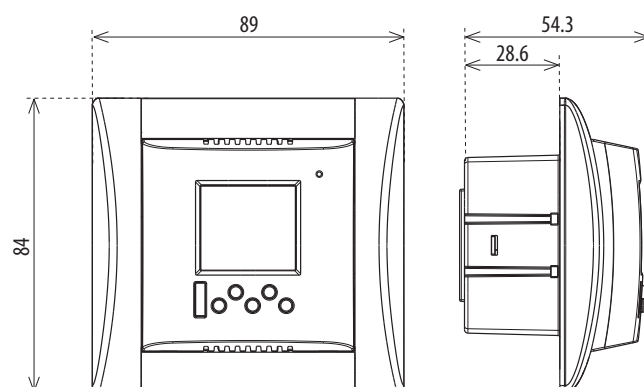


RHV-1, TEV-4

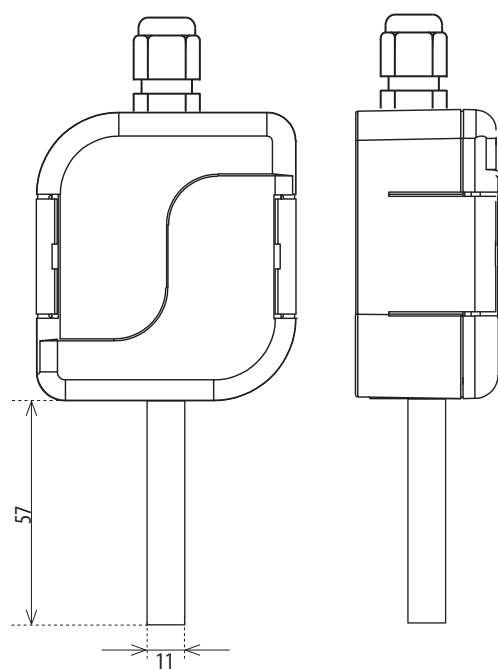


SOU-3

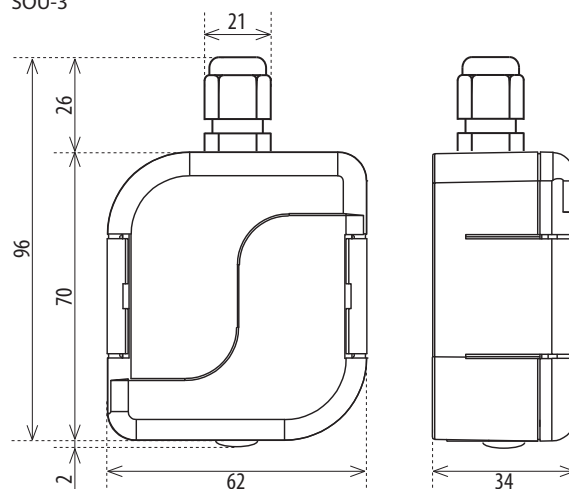


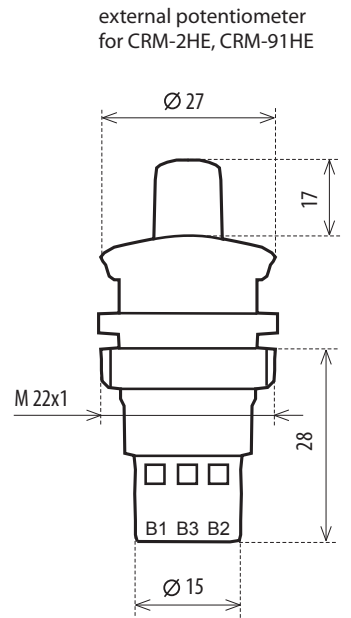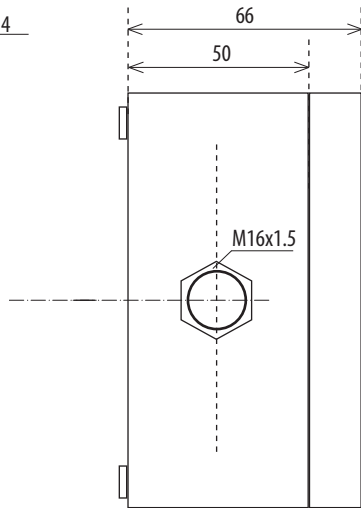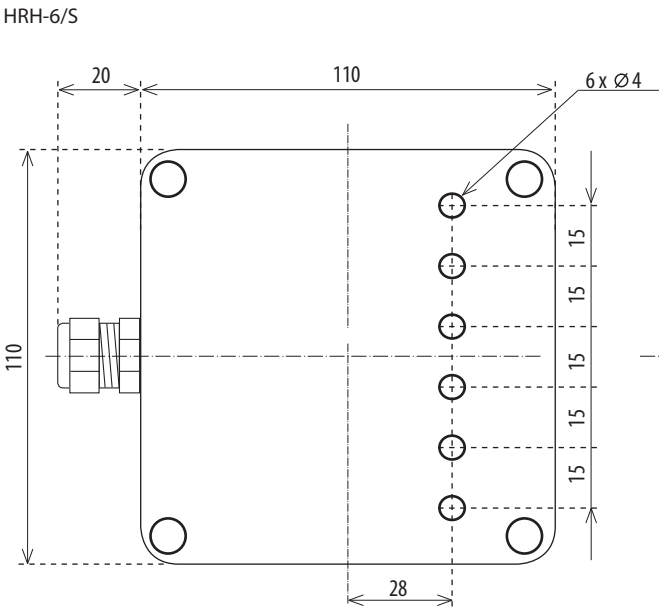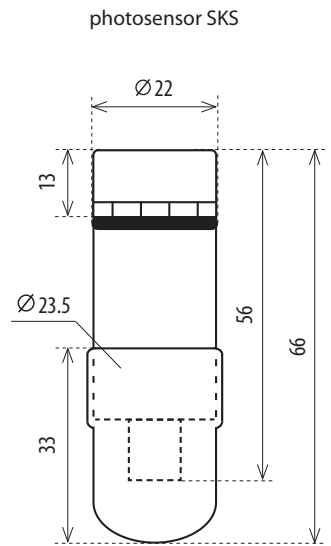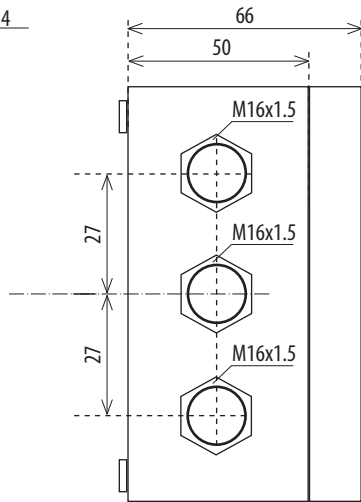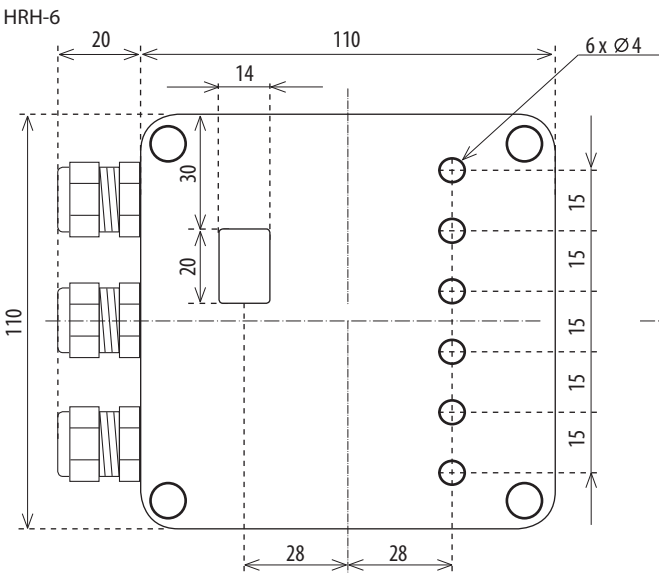


HRH-VS, HRH-MS

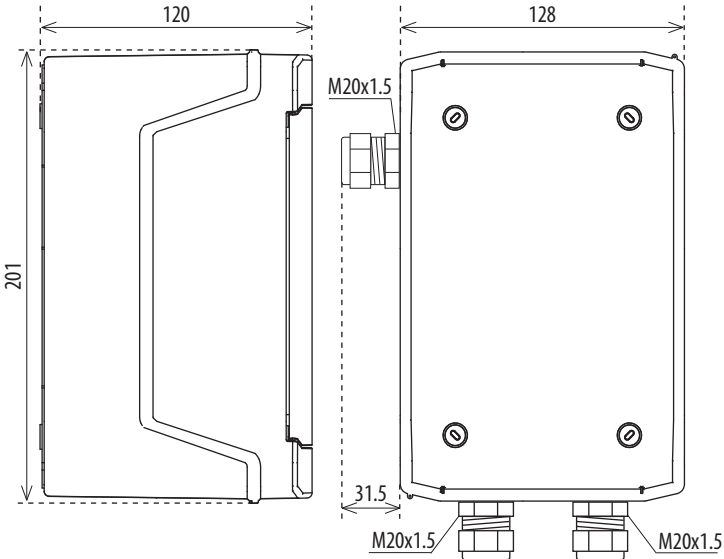


HRH-MS-VS

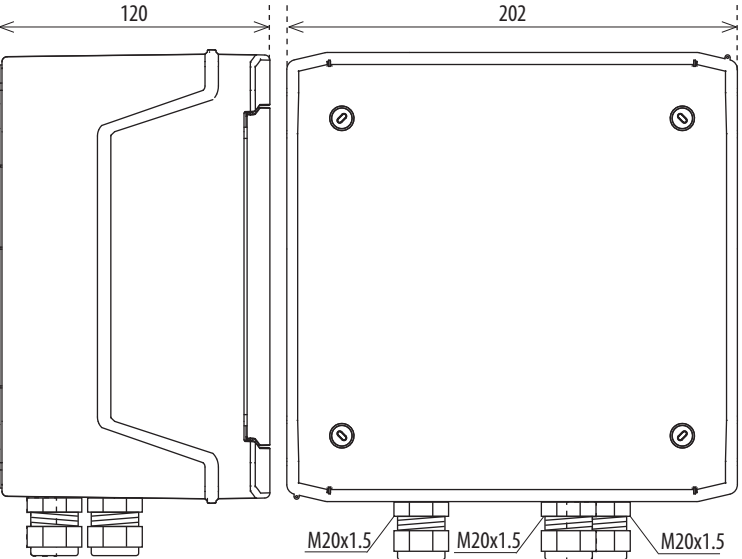


TEV-1, TEV-2

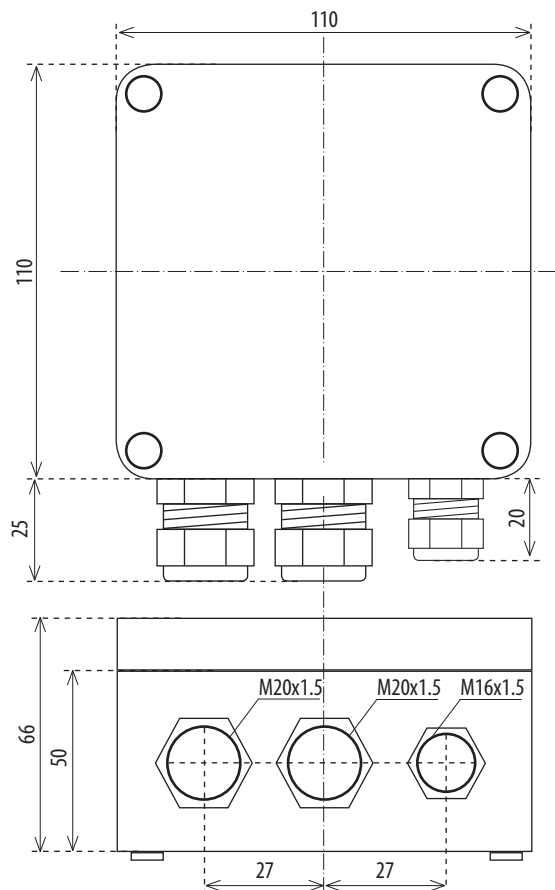


TEV-3

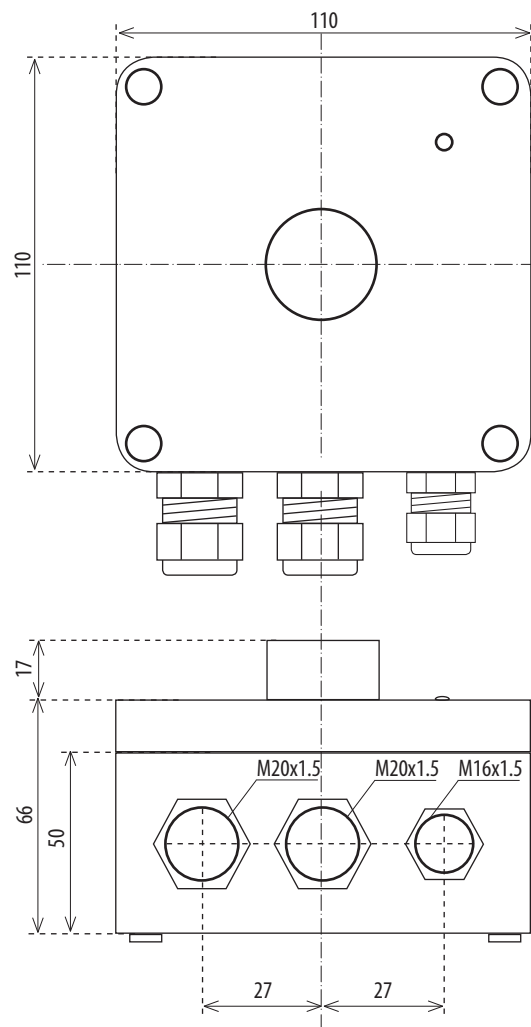


HRH-7

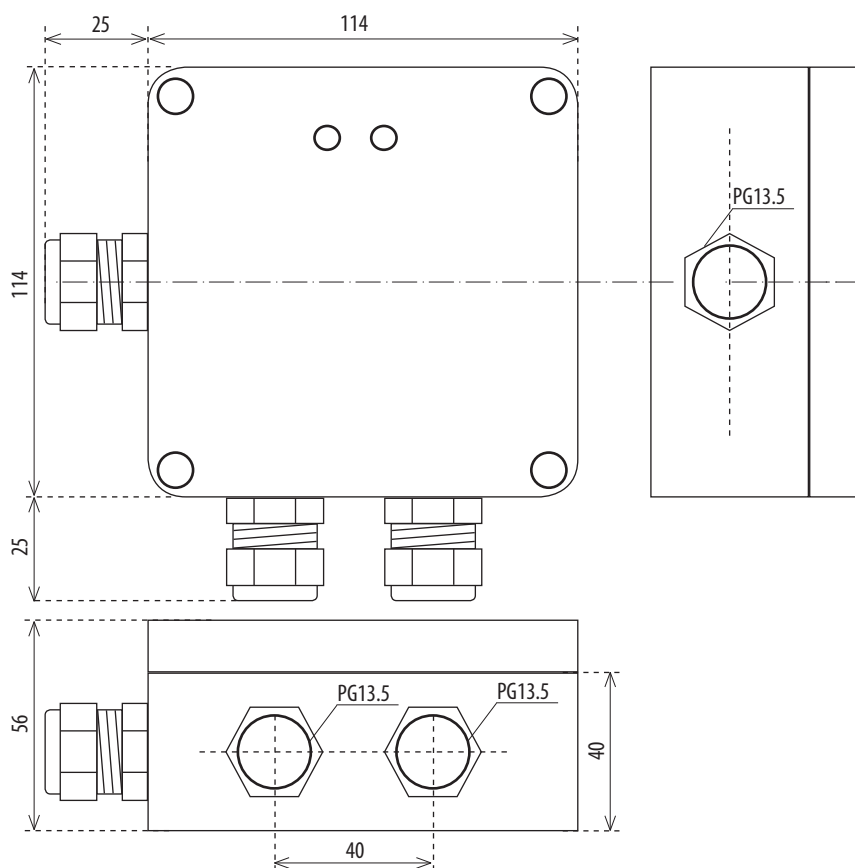


ATV-1

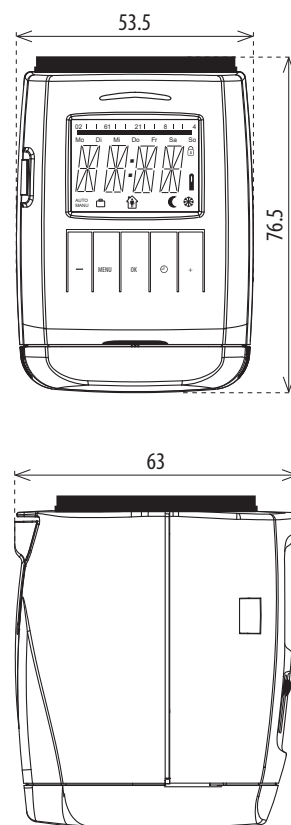


PRM-91H/11, PRM-91H/8, PRM-92H, PRM-2H

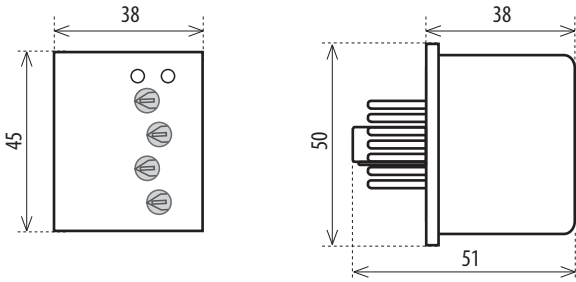


Level sensor  
SHR-3

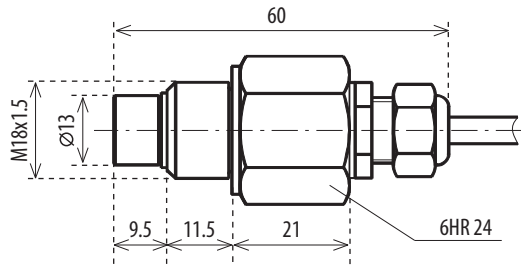

782L

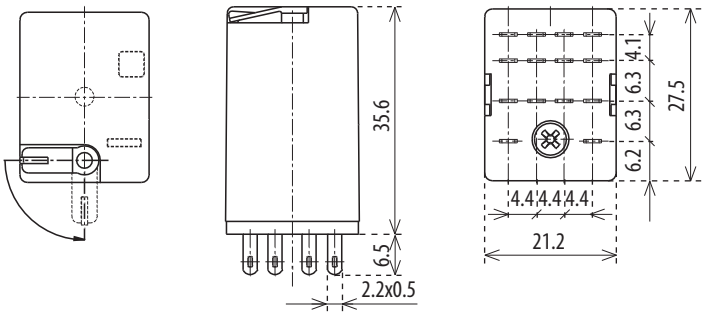


750L

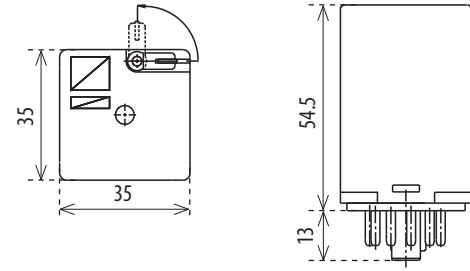


Socket for PRM-91H/11, PRM-92H,  
PRM-2H, 750L

ES-11

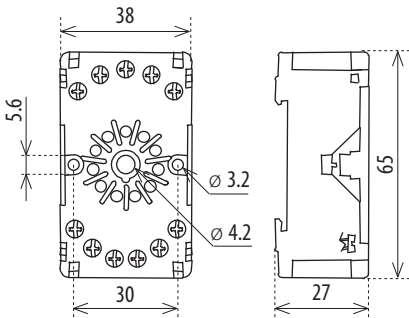


Socket for PRM-91/8

ES-8

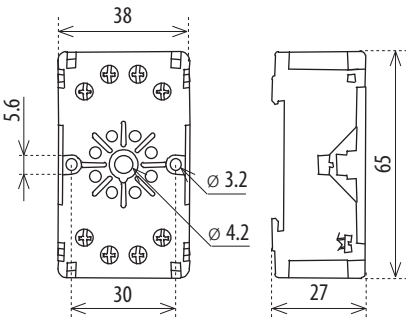


Socket for 782L

ES-15/4N

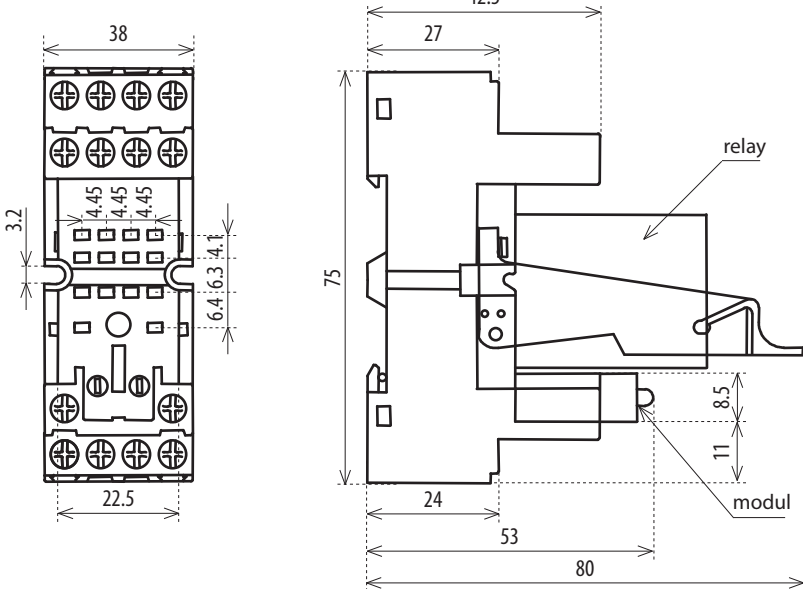


USS


Unit: 00

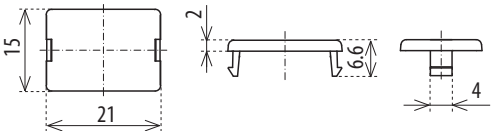


Unit: 01

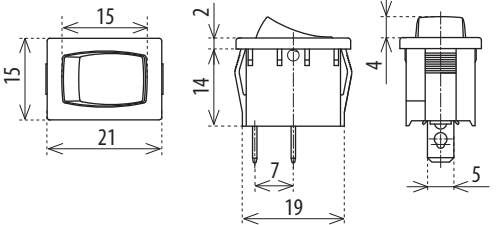


Unit: 02, 06, 07, 08, 09

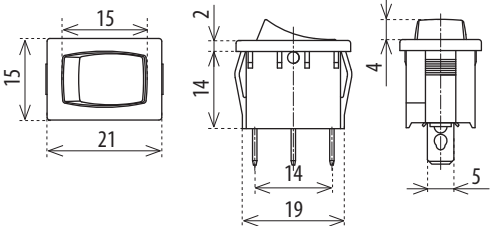

Unit: 03, 04, 05

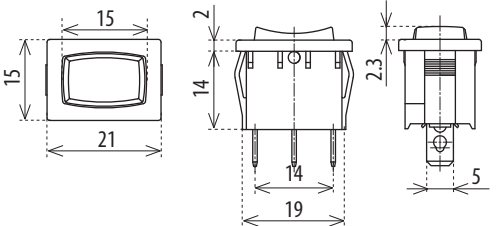


Unit: 10, 11, 12, 12, 13, 14, 15

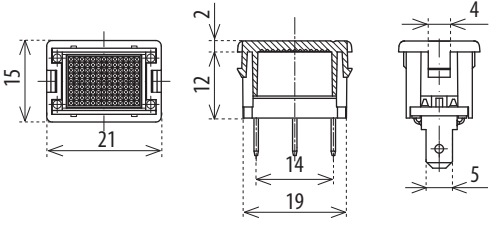






VS120  
VS220  
VSM220

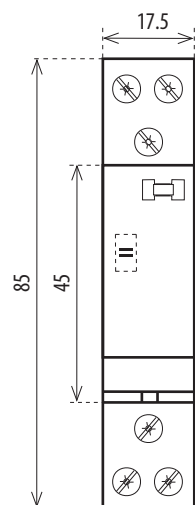


VS425  
VSM425

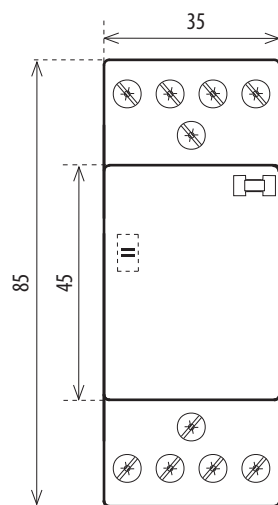


VS440  
VS463

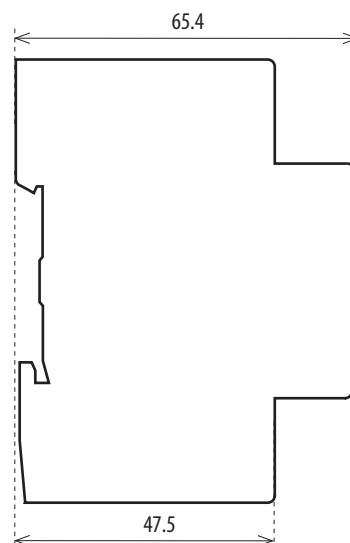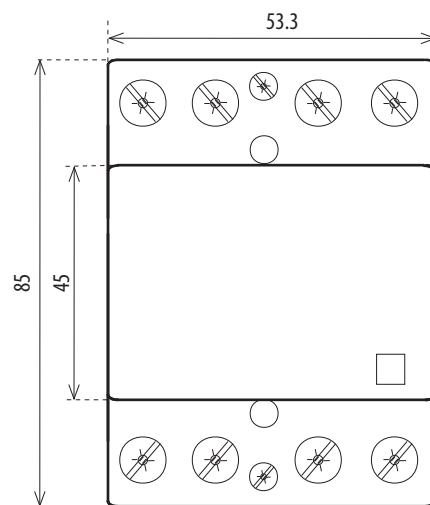


VS420

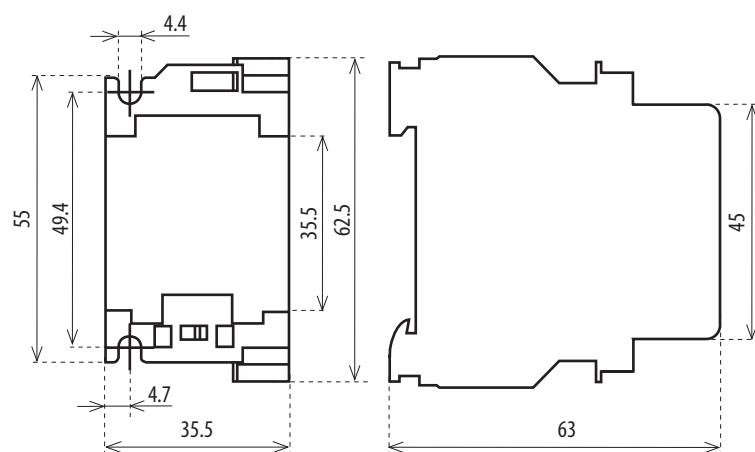


VSK-20

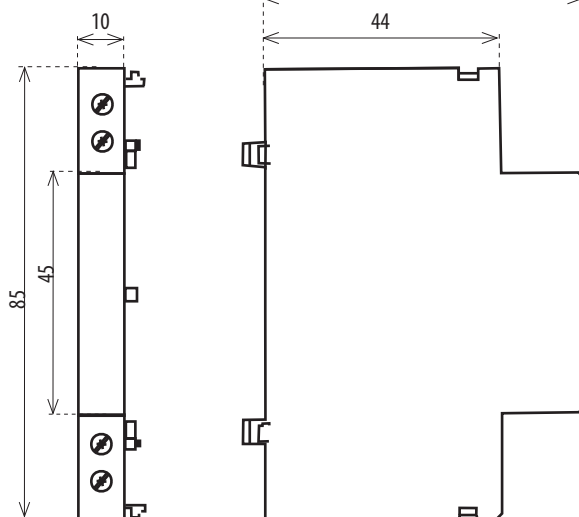

IKV

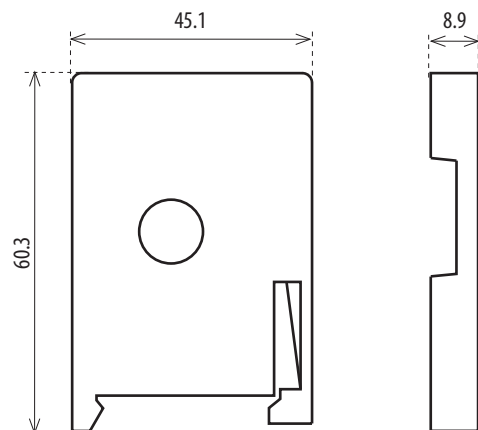


CRM-100

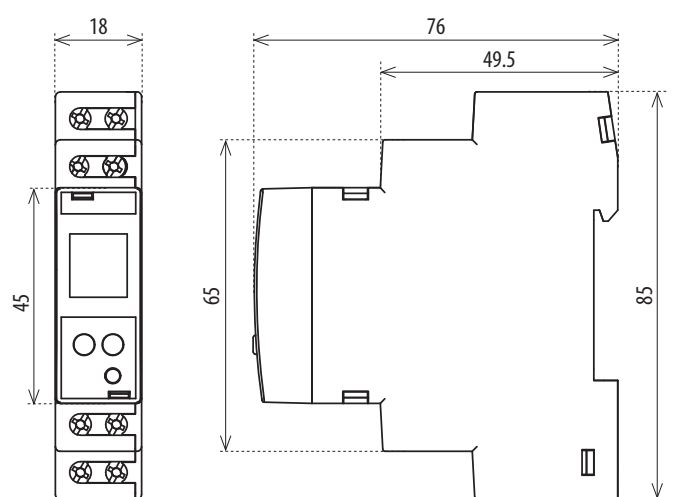


Multifunction time relay CRM-91H,CRM-93H

- for electric appliances, where is necessary to change the exact timing - controlling of the illumination, heating, motors, machines, ventilators, contactors...

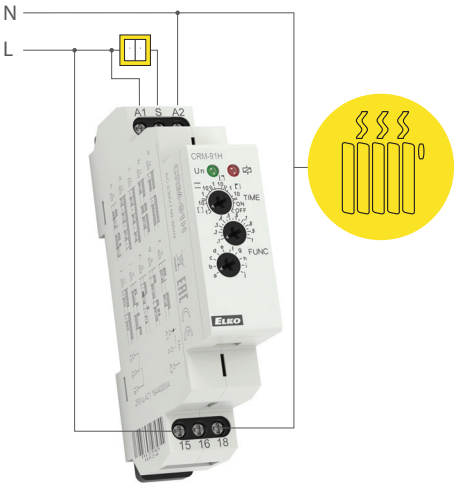


Multifunction time relay with contactless output CRM-9S

- using for warning illuminatin on the road, flashers, cyclers, often switched systems ...

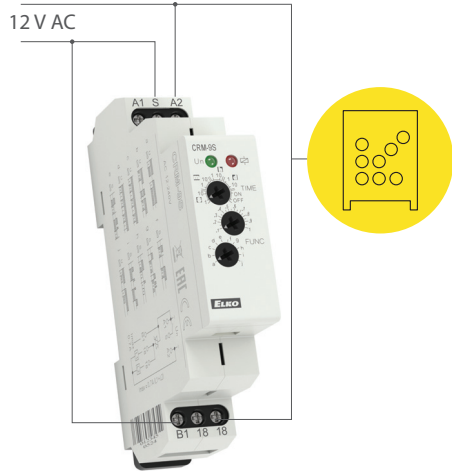


Multifunction time relay with external potentiometer CRM-91HE

- time adjusting via external operating unit, operating on panel, switchboard doors

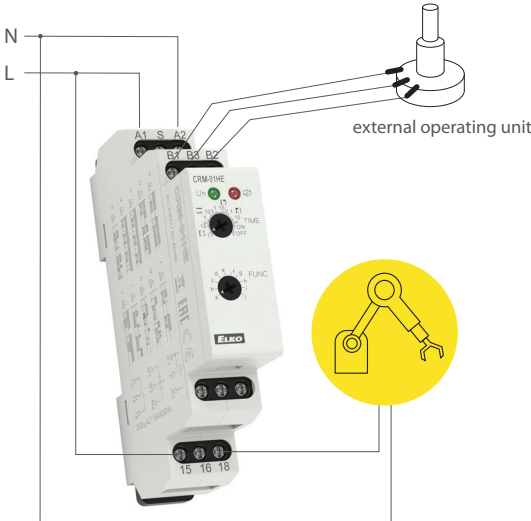


Singlefunction time relay CRM-81J

- time switch, using for run down the pump after switch off the heating, switching of ventilators ...

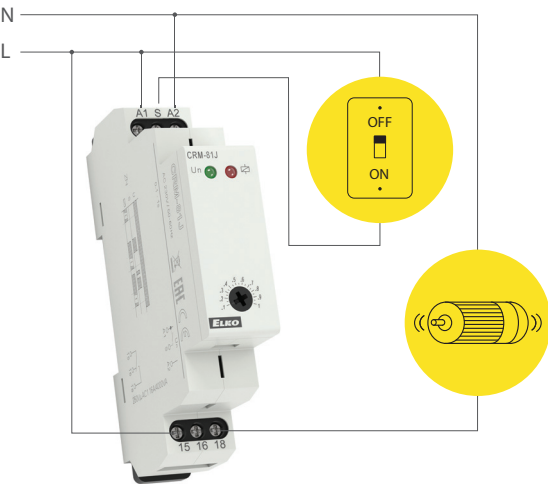


Multifunction time relay CRM-61

- for electronic appliances, light control, heating, motors, fans....

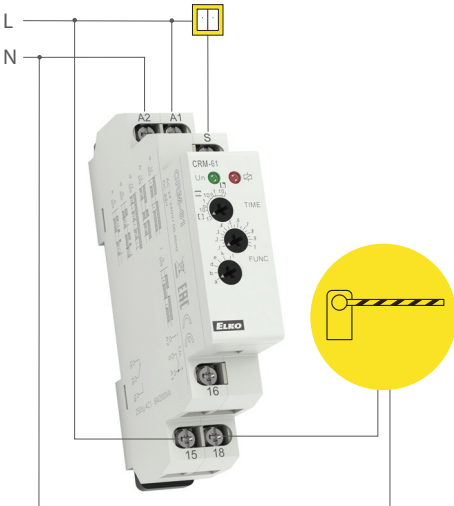


## Time relay plug-in type PRM-91H, PRM-92H

- serves to control light signalization, heating, motor and fan control etc.

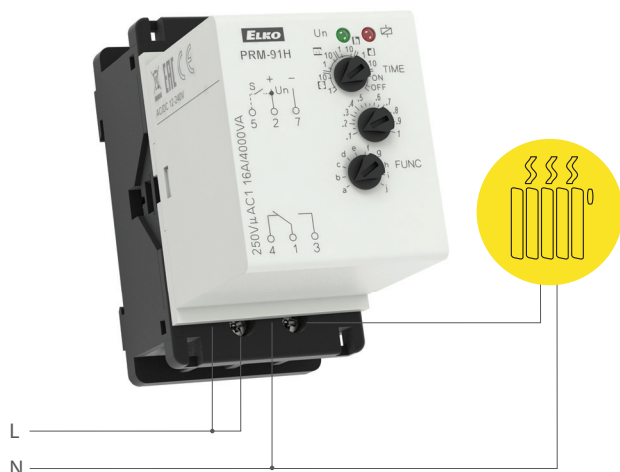


## Delay OFF without supply voltage CRM-82TO

- delayed back-up switch off at current failure (emergency illumination, emergency respirator)

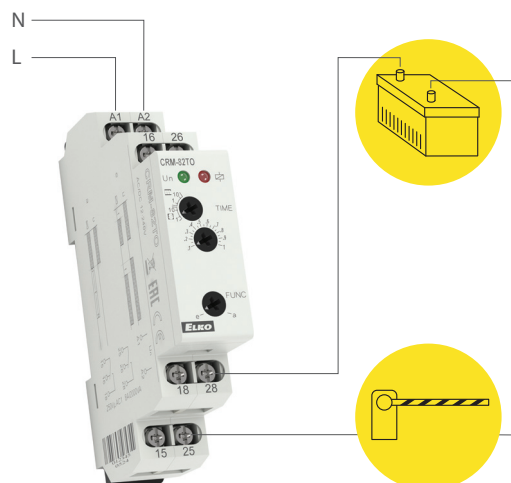


## Doublestage delay unit SJR-2

- for sequential load switching, electric furnaces, heaters....

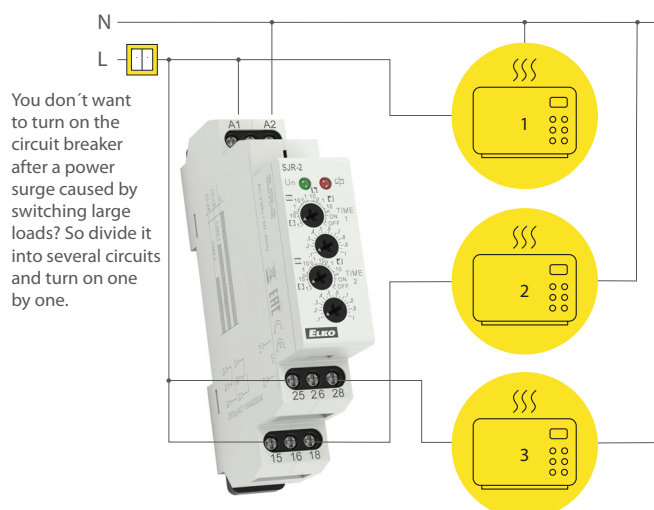


## Asymmetric cycler CRM-2H

- regular rooms ventilation, cyclic humidity exhaustion, illumination controlling, circulation pump, flash, warning appliances, regular pump down, regular irrigation via electromagnetic valve

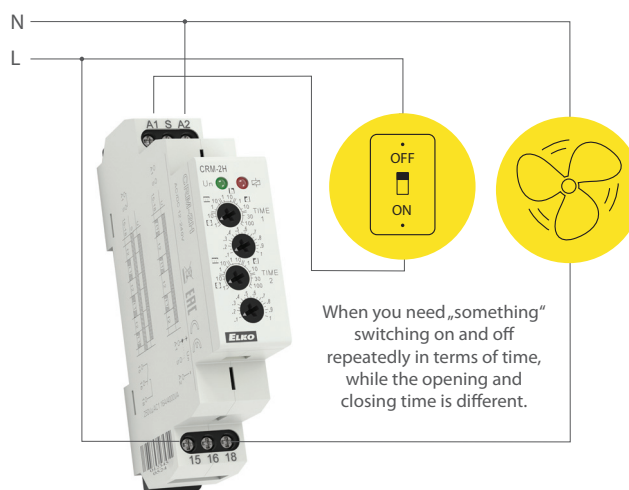


## Staircase switch CRM-4

- staircase automatic systems, ventilators switching, for multiplace operating illumination on the staircases and halls...

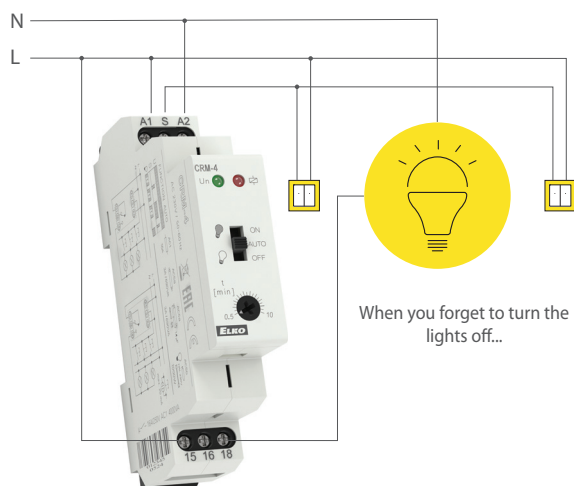


## Programmable staircase automat with signalling before switch off CRM-42

- staircase illumination operation  
- on-coming switch off signalling (flash = comfort + safety together)

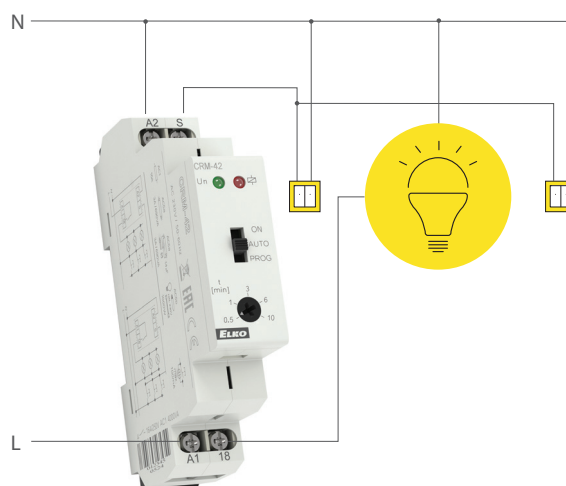


Digital time switch SHT-1/2

- for controlling of all appliances that depend on real time, appliances could be controlled in regular cycles, or according to adjusted program (blocking of main door out of working hours or night)
- in combination with other devices, controlling could be combined (rooms ventilation, irrigation controlling, bell at school or in church...)

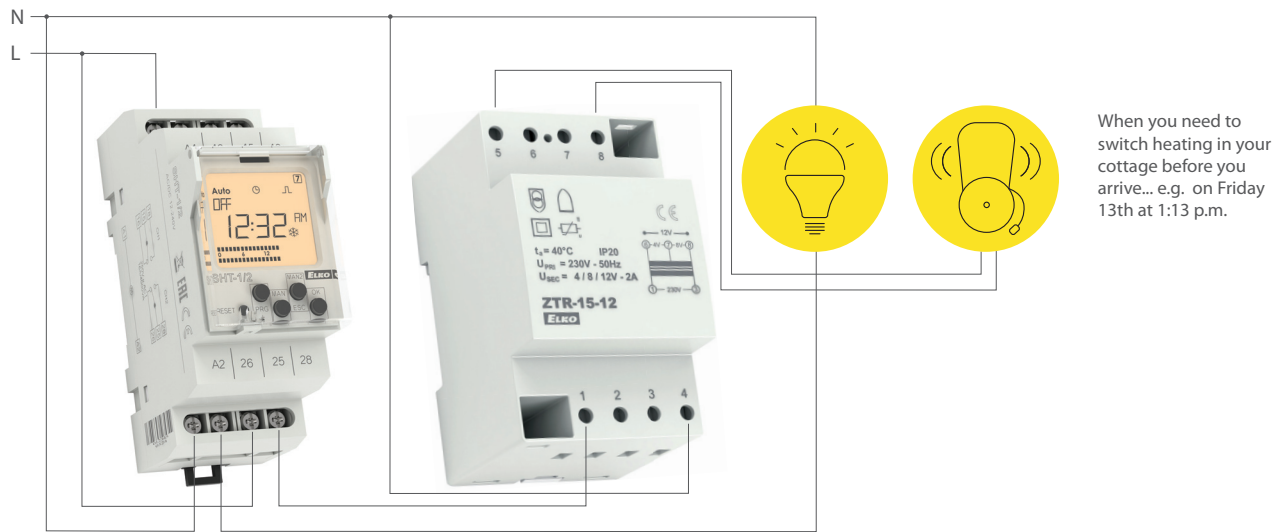


Programmable digital relay PDR-2

- illumination, ventilators, contactors controlling, controlling of interlocking plans, system of time abate and blocking (billiards, pin-balls....), away control via external buttons

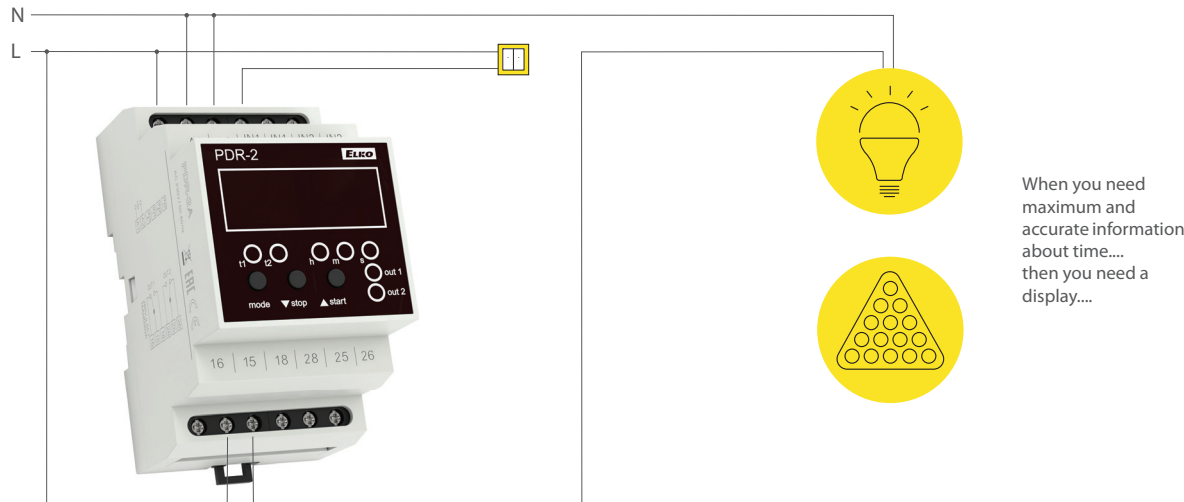


Twilight switch SOU-1

- outdoor illumination switching (garden illumination), flash, shop-window, hall and office illumination (switch off in desired light level, controlling of intensity)

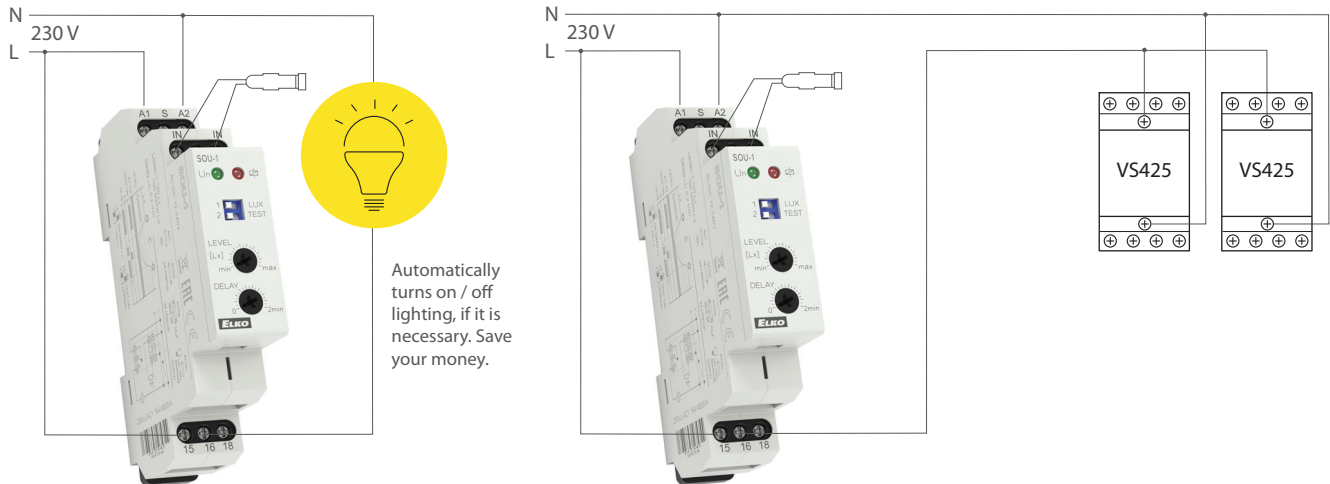


## Delay on star/delta CRM-2T

- motor starting more than 3 kW, electronic switchover from mode start to mode operation with device CRM-2T, what assures exact timing

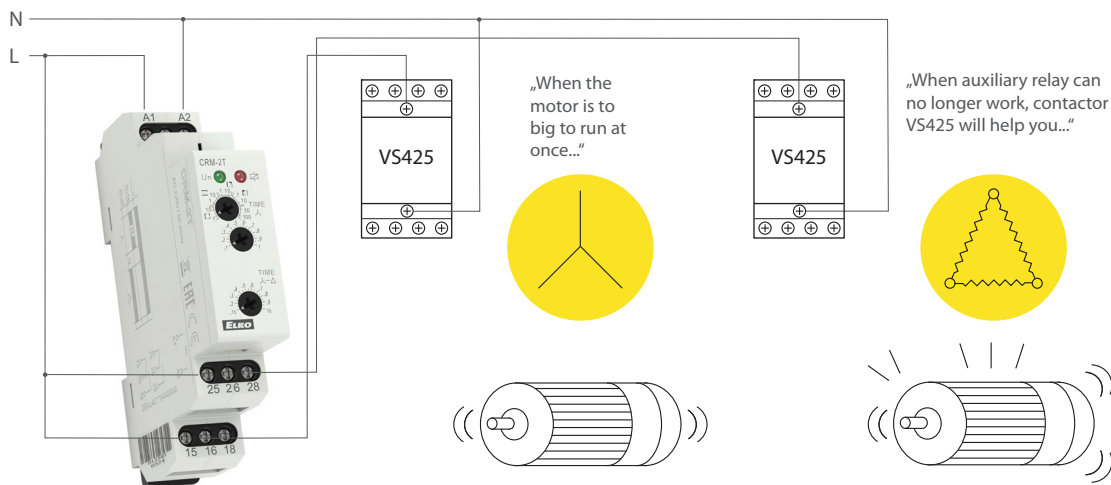

## Modular contactor VS120, VS220, VS420, VS425

- to switch circuits for supply and control of heating, lights, air-conditioning and other el. devices.  
Switches loads AC-1, AC-3, AC-7a, AC-7b, AC-15.

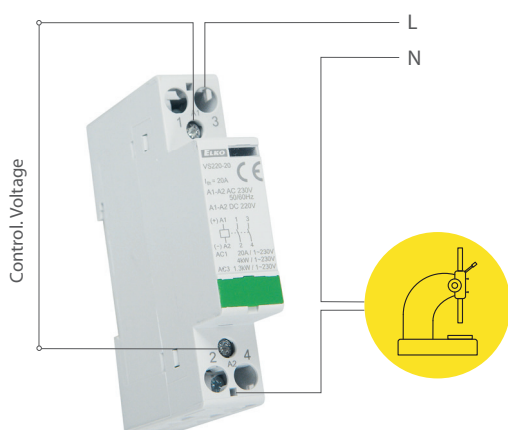


## Mini contactor VS425

- switching of the higher loads, especially in other categories than AC1


## Modular contactors VS440, VS463

- to switch supply and control circuits for heating, air-conditioning and other el. devices, switching 3-phase motors  
Switches loads A-1, AC-3, AC-7a, AC-7b, and AC-15

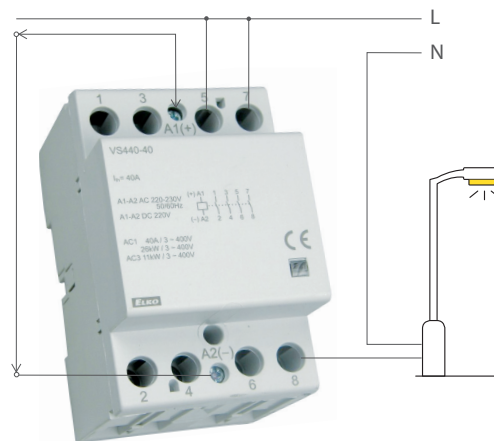


## Auxiliary plug-in relays 750L, 782L

- to switch bigger output (load)

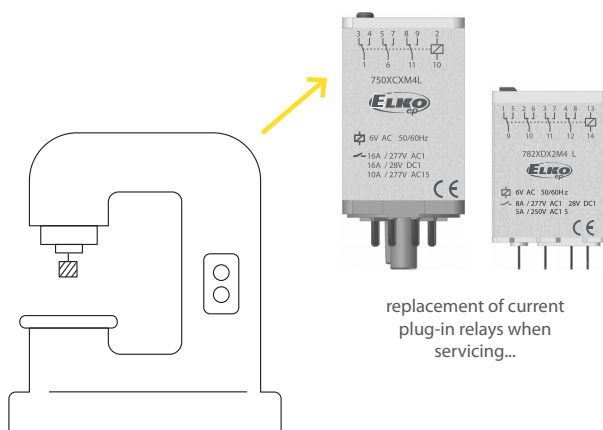

## Digital time switch SHT-1, SHT-1/2


- for controlling of all appliances that depend on real time, in daily or weekly mode

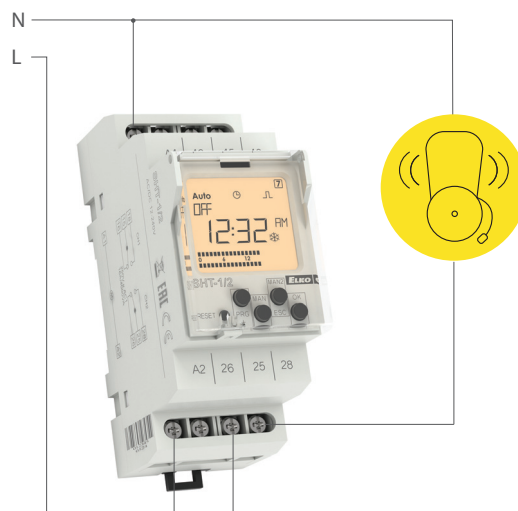

# Examples of usage

## Staircase automat with dimming DIM-2


- step by step (fluent) dim up, adjusted time is ON and fluent dim down (e.g. possible to adjust permanent shine to min. brightness everlasting light)
- block of flats (entry, halls, staircases), garden lighting

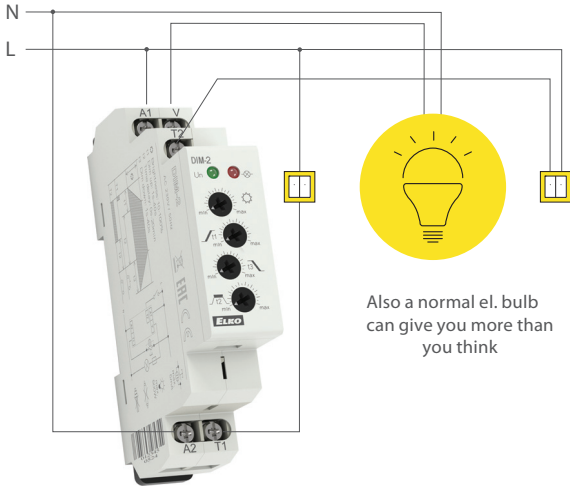

Also a normal el. bulb can give you more than you think

## Controlled dimmer DIM-5


- short press ON/OFF, long press - brightness regulation, is in memory. Other presses activate memory
- switch on and dimming of hall, staircase ...

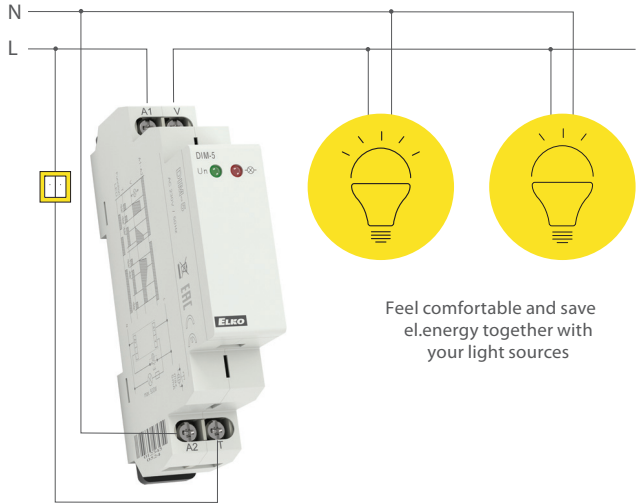

Feel comfortable and save el.energy together with your light sources

## Memory relay MR-41, MR-42


- because of 2-wire parallel buttons connection save money, place and time during the installation
- light switching, hall, staircase, big rooms, controlling systems, automation

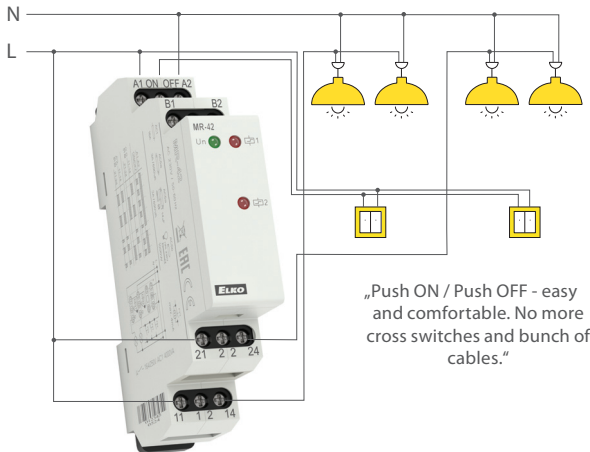

„Push ON / Push OFF - easy and comfortable. No more cross switches and bunch of cables.“

## Power relays VS


- switching of higher load than is capacity of switched unit = repeater
- assistant light controlling, signalling, boilers, ...

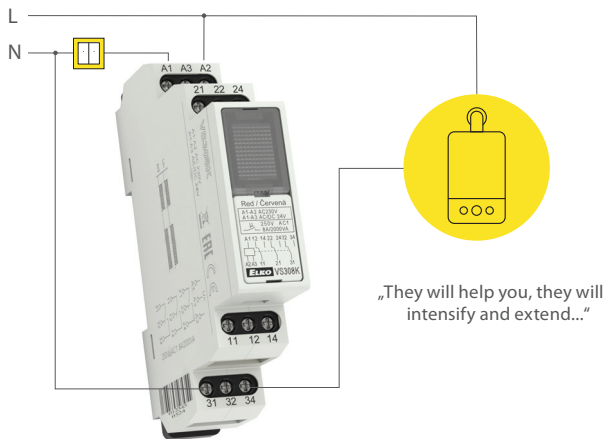

„They will help you, they will intensify and extend...“


## Switching power supply PS-R

- power supply of any devices and appliances via safe voltage with full galvanically separated from mains
- power supply of driving systems, interlocking plants and use in measurement and control

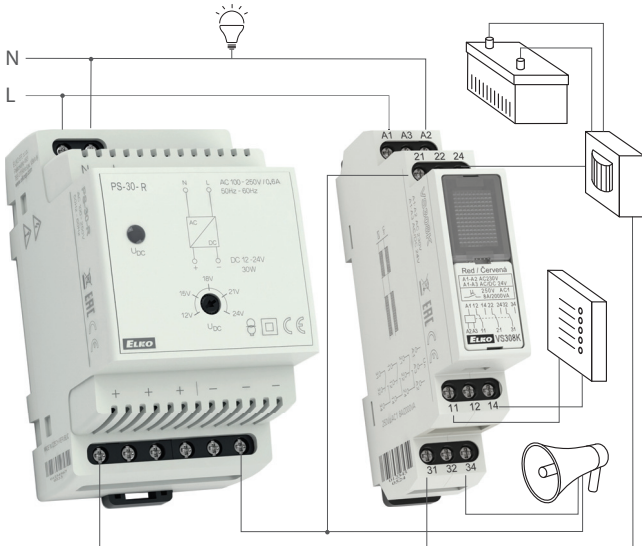

## Controlling and signalling units USS

- compact dimensions, elegant design, wide range of use, configuration for request
- switching and signalling in switchboard, controlling centre, automation...

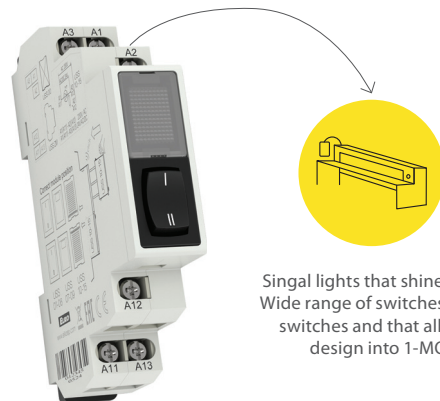

Singal lights that shine and flash: Wide range of switches, alternating switches and that all in double design into 1-MODULE




## Monitoring voltage relay HRN-33 (35)

- monitoring of mains voltage for appliances inclinal to supply tolerance

## Monitoring voltage relay HRN-33 (35)

- protection of appliances against under-/overvoltage


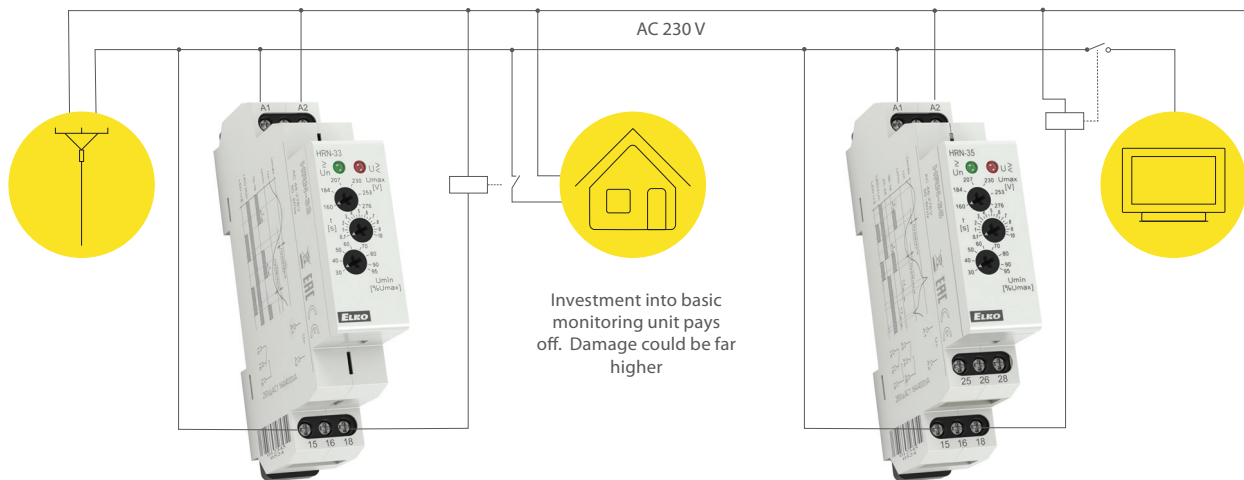


## Monitoring voltage relay HRN-35

- start of back-up supply in case of failure

## Monitoring voltage relay HRN-34


- load disconnected when voltage declines or battery is discharged

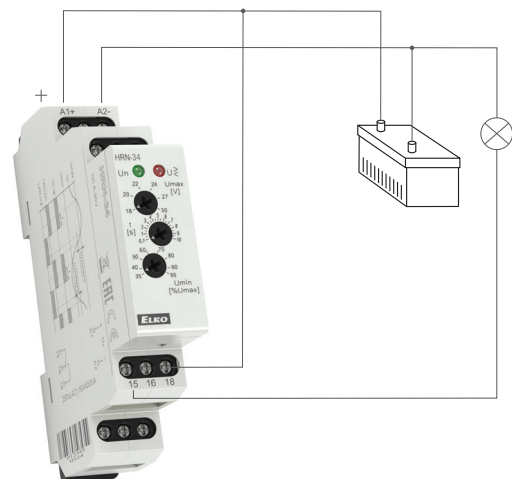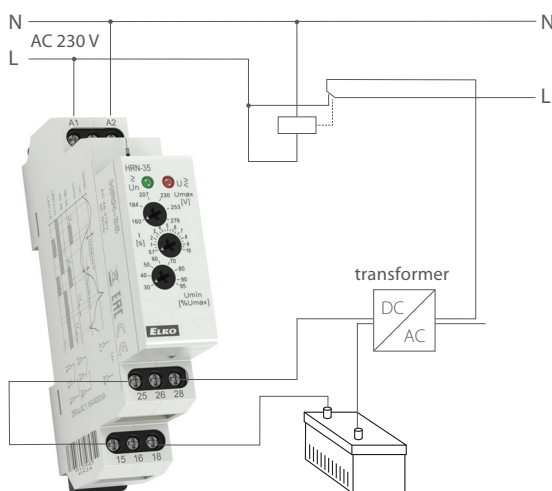

## Monitoring current relay PRI-51, PRI-32


- current-limiting relay (on one branch two appliances, which never work together), controlling systems, motors, heating, current indication, controlling of 1-phase motor run down, during the installation of main housing switchboard could be controlled via eye, if the cooker is not switched

- in connection with current transformers, it is possible to extend current ranges up to 600A, which makes more things possible

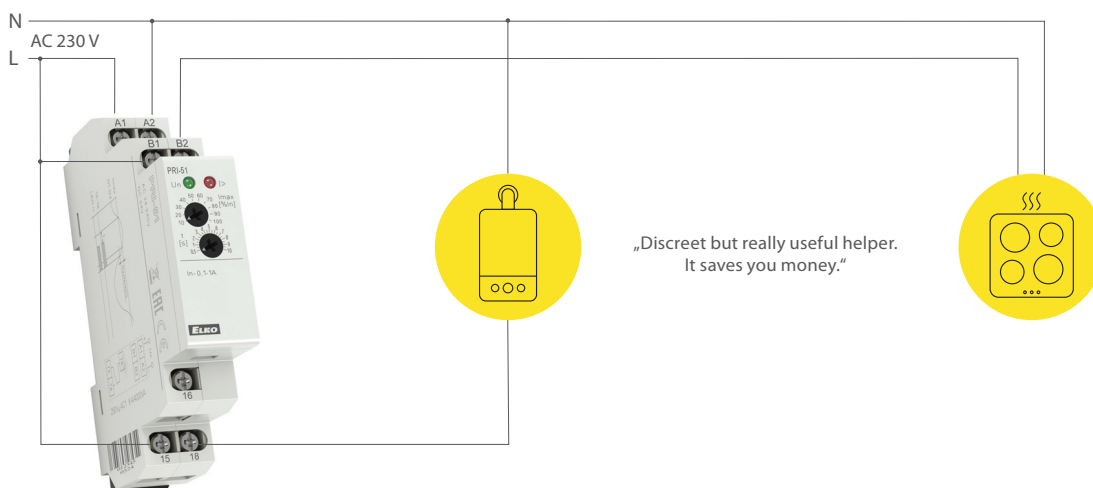


Relay monitoring power factor COS-2

- monitors power-factor in 3-phase mains / unloading of motors, pumps, lift systems

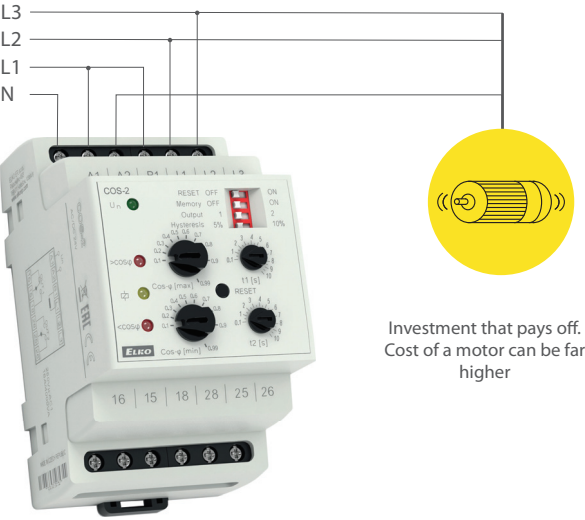


Monitoring voltage relay HRN-43

- regulation of voltage from generator, water el. plants, 3-phase control in the main  
- monitors and protects main's quality

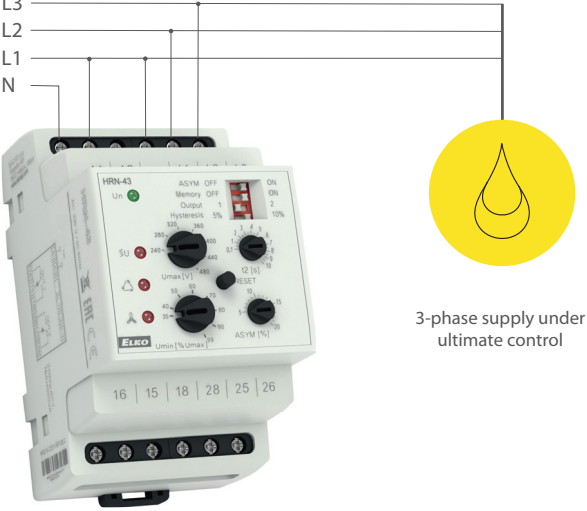


Relay monitoring sequence and failure of phases HRN-55, HRN-55N

- monitoring of proper motor rotation, electric drive, etc.

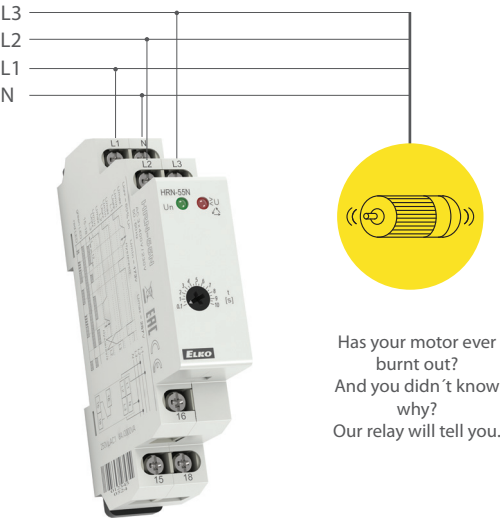


Relay monitoring over-/undervoltage in 3-phase mains HRN-54N

- monitoring voltage in switchboard, protection of appliances

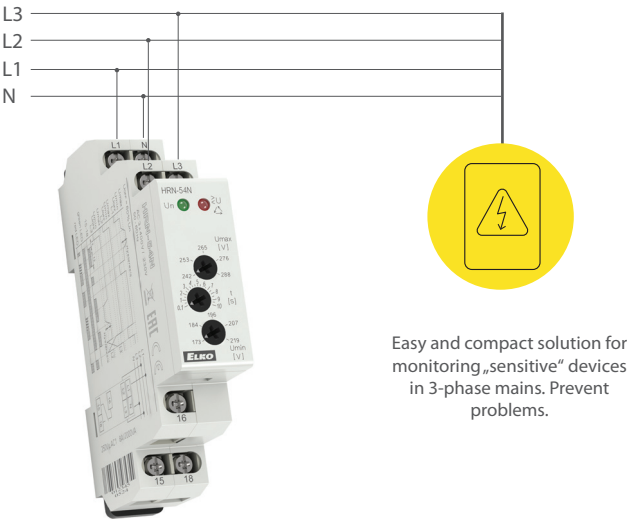


Monitoring voltage relay for under/vervoltage for 3-phase mains HRN-54

- confortable monitoring of 3-phase mains

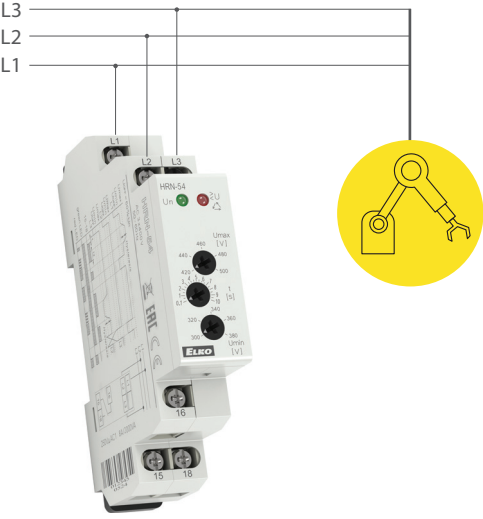


Monitoring current relay PRI-41 (PRI-42)

- monitoring over-/underload (machine, motor ...)  
- monitoring consumption, diagnostics of distant appliance (short circuit, increased consump. ...)

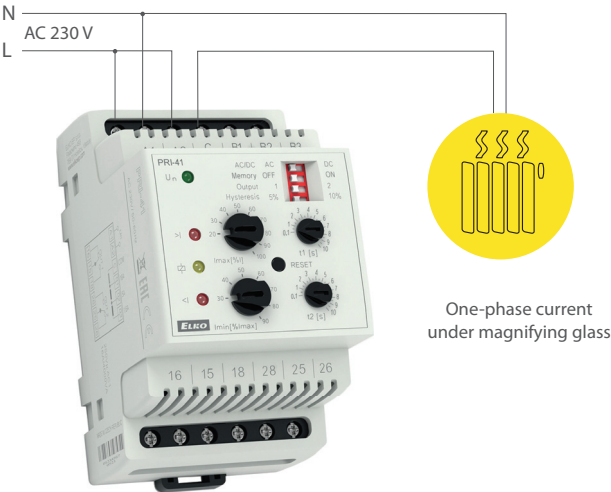


## Level switch HRH-8

- monitoring level in wells, tanks, pools, etc.

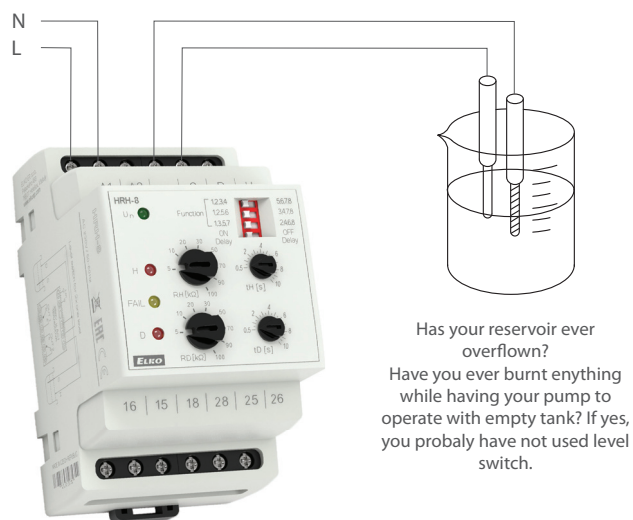


## Level switch HRH-5

- monitoring level in well, sump, tanks, silo...

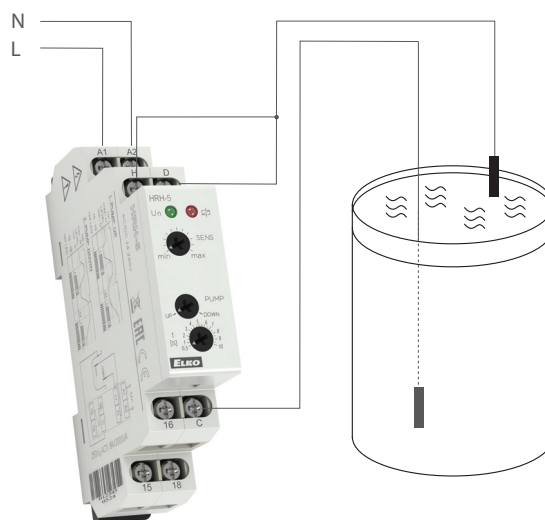


## Thermostat TER-3 with external sensor

- control of temperature of floor heating

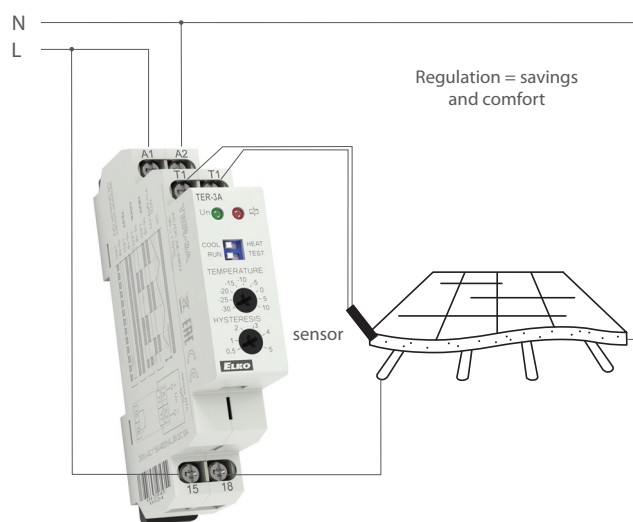


## 2 stage thermostat TER-4 with 2 external sensors

- control of temperature of e.g. gas/electric boiler

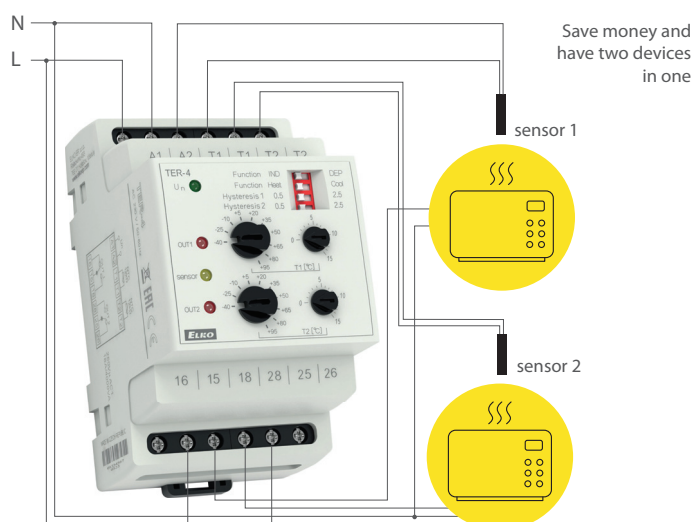


## Thermostat for thermal protection of motors TER-7

- protection of motors against thermal overload








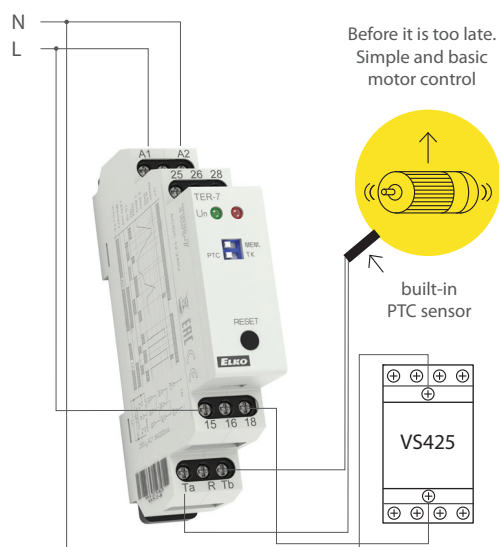


## Multifunction digital thermostat TER-9


- complex control of heating and water heating in a house

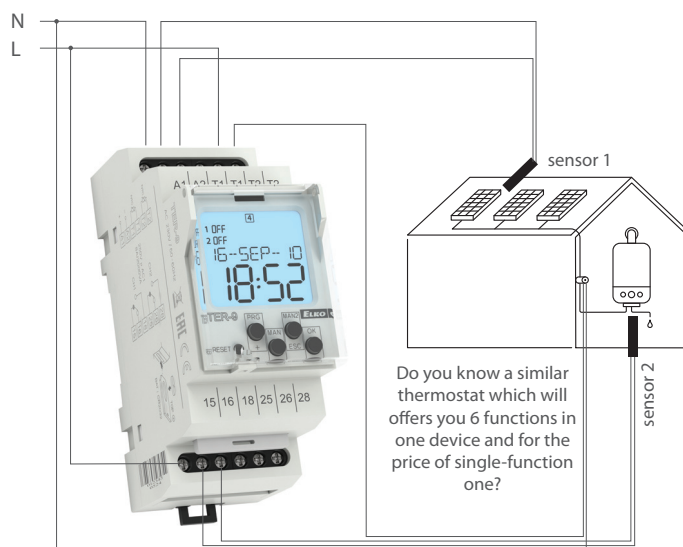

Others just resell  
HOWEVER, WE DEVELOP AND MANUFACTURE  
PRODUCTS OURSELVES!

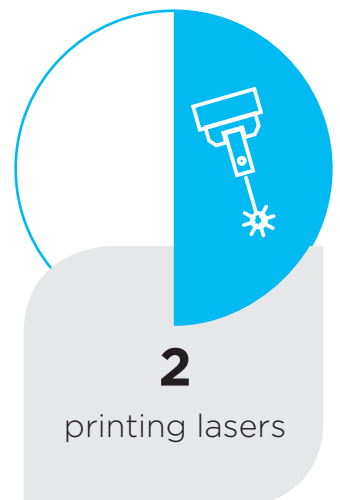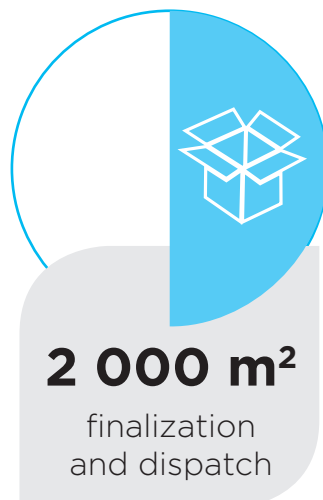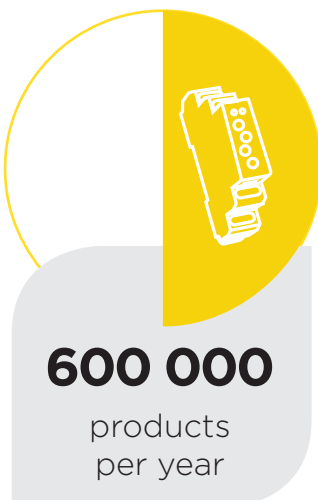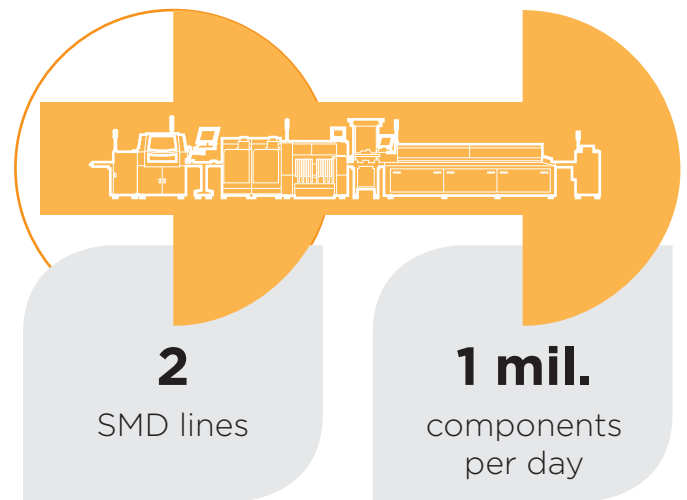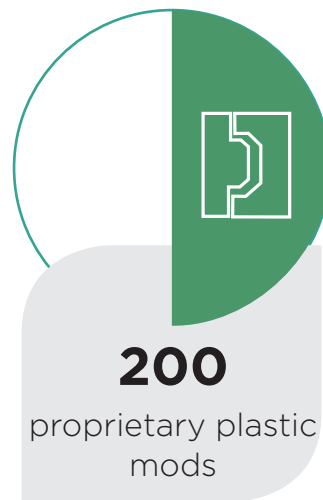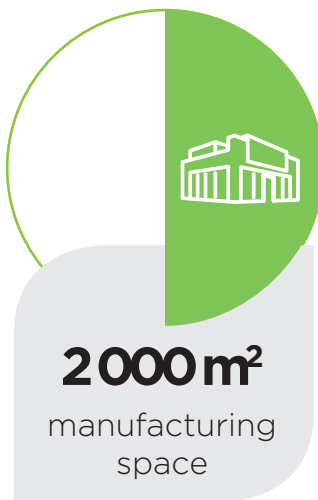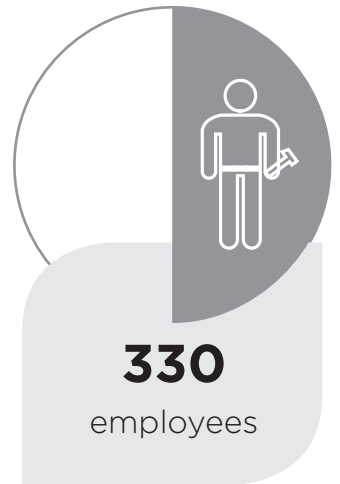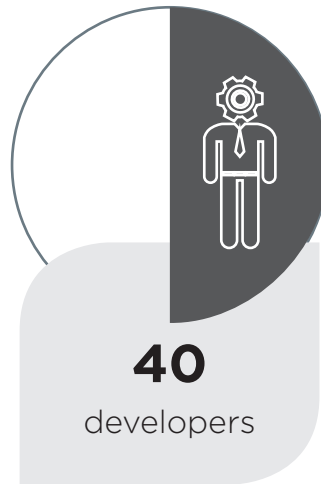



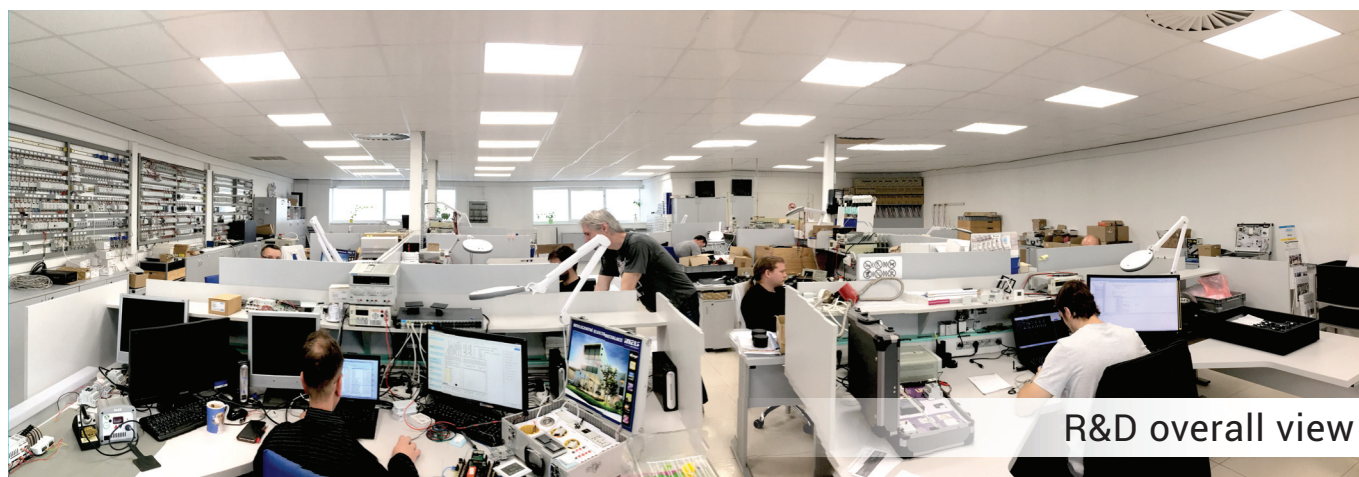

R&amp;D overall view




Manufacturing hall



Testing lab



Finalization and dispatch

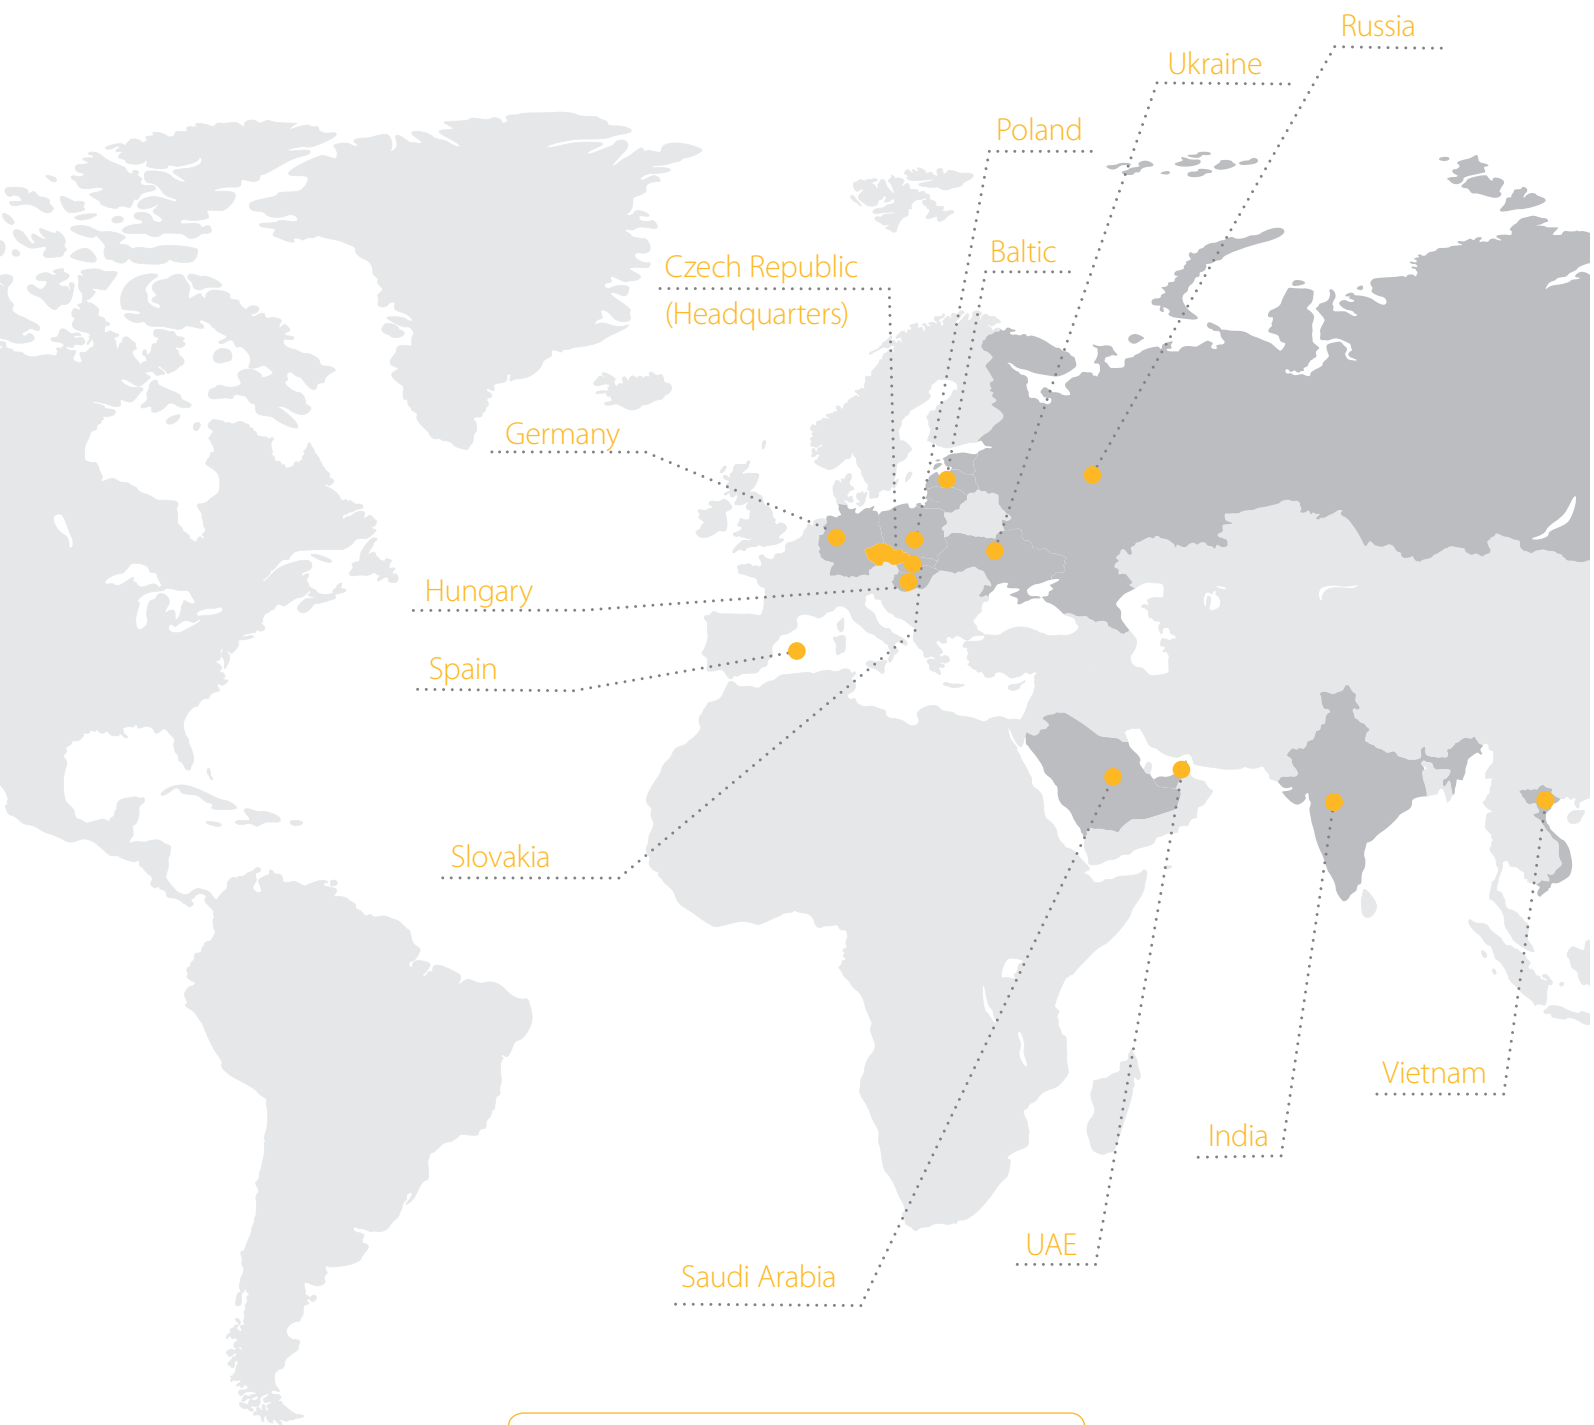

**ELKO EP, s.r.o.**

Palackého 493 | 769 01 Hořeslav, Vsetulý | Czech Republic

phone: +420 573 514 221 | fax: +420 573 514 227 | [elko@elkoep.com](mailto:elko@elkoep.com) | [www.elkoep.com](http://www.elkoep.com)

Published: 01/2019 | Modifications or amendments reserved | © Copyright ELKO EP, s.r.o. | 1st edition