



# WIRELESS COLOURED BULB



## Bulb - assembly and settings / how to do it?


### Assembly

Replace your existing bulb with the wireless-controlled bulb.



### Settings


Assigning to system units.




address of bulb

Each bulb has its own **address** (unique code). You insert this directly into the application **iHC-MAIRF** / **iHC-MIIRF** or into the remote control **RF Pilot** / touch control unit **RF Touch**.

Assigning to controllers.



Switch on the push-button three times at an interval of around 1 s (last position on) = programmable mode - the bulb flashes for 5 s while waiting for assignment of the controller. The last bulb settings are automatically stored after 15 seconds to be controlled by the existing push-button.



Delete the assigned controller by switching on the existing 5 times (last position on - the bulb will flash 5x).

## Control


**RF KEY**  
< 0.5 s = ON/OFF  
> 0.5 s = color settings  
**FUNCTION OF BUTTONS**  
1/2/3) arbitrarily set color  
4) brightness control  
The action „CIRCUS“ starts by combined pressing of buttons 3 and 2.

### iNELS Home Control

The application iNELS Home Control enables dimming of lighting, switching appliances, heating, control of blinds and all devices connected to the RF Control System, including IP video cameras via the Smart RF Box.




## WE CAN CONTROL YOUR HOME VIA SMARTPHONE!

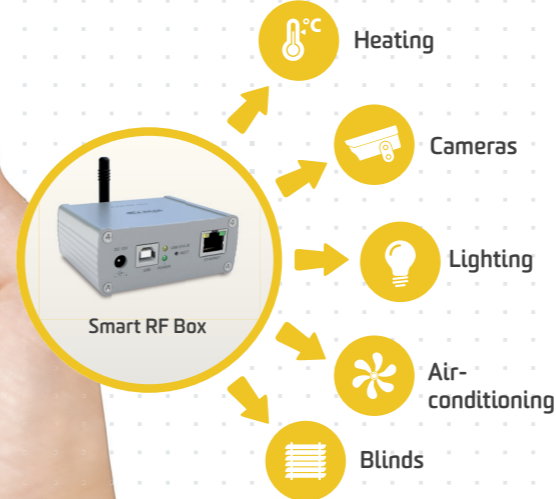

## Configuring the application / how to do it?

1. Click on "Configuration", then on „Settings“ and go to the tab „Units“.



2. To add further Units, click on „Add“ and enter the required data (Name of unit: any, Select eLAN, Enter an address of actuator: see image 1, Type of actuator: type designation of unit - see image 2, Select of icon: according to function of given unit; see image 3, Please select a room). By pressing on „Save“, insert the unit.

Configuration form with fields for Name of unit, Select eLAN, Enter an address of actuator, Type of actuator, Select icon, and Please select a room. A Save button is at the bottom.

In this screen, you simply configure the device.

**CONGRATULATIONS!**  
The device is ready to use!

